

YOU STAND. WE DELIVER.TM

2015 CATCH A L O G
S W I T C H B O A R D




RHINO
ANTI-FATIGUE MATS







ASTM SWITCHBOARD Rubber Insulating Mats

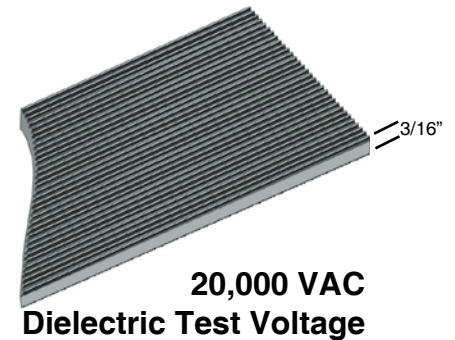


**20,000 VAC
Dielectric Test Voltage**

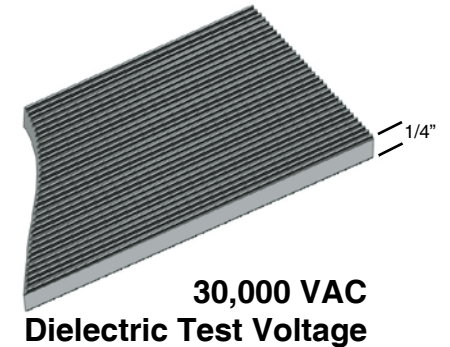

**30,000 VAC
Dielectric Test Voltage**

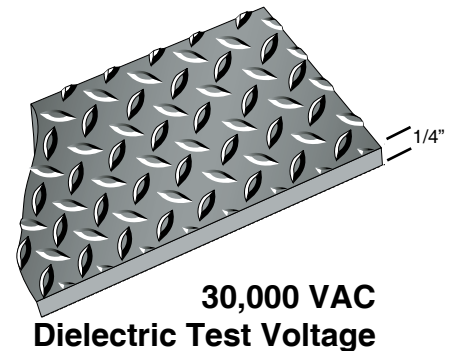


**30,000 VAC
Dielectric Test Voltage**

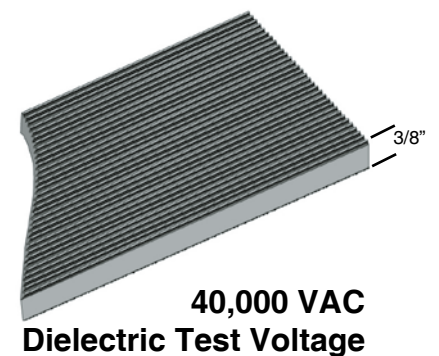

**40,000 VAC
Dielectric Test Voltage**

**With Optional
Beveled Edge**

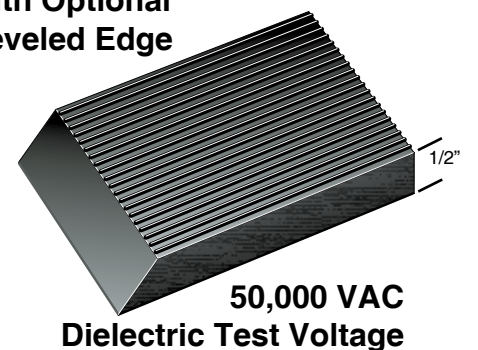

**50,000 VAC
Dielectric Test Voltage**

CORRUGATED SWITCHBOARD MATTING

- A specially compounded non-conductive corrugated matting designed to help prevent electric shock around high voltage electrical equipment, such as fuse boxes, and control panels.
- Now meets all optional requirements for Ozone Resistance, Flame Resistance, and Oil Resistance.
- Tested to ASTM D178/ANSI J6.7. Certification engraved on back.

CLASS 1 - 3/16" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 20,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 10,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 7,500 VAC

Stock #	Size	Weight/Ln.Ft.
SB336	3' x 75'	3.9 lbs.

Color: Black. Sold in cut lengths and full rolls.

CLASS 2 - 1/4" Thick Switchboard - Corrugated & Diamond Pattern

- DIELECTRIC TEST VOLTAGE 30,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 20,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 17,000 VAC

Stock #	Size	Weight/Ln.Ft.
SB424	2' x 75'	3.5 lbs.
SB436	3' x 75'	5.2 lbs.
SB448	4' x 75'	6.8 lbs.

Color: Black. Sold in cut lengths and full rolls.

CLASS 3 - 3/8" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 40,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 30,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 26,500 VAC

Stock #	Size	Weight/Ln.Ft.
SB536	3' x 75'	7.7 lbs.



Color: Black. Sold in cut length and full rolls.

CLASS 4 - 1/2" Thick Switchboard - Corrugated

- DIELECTRIC TEST VOLTAGE 50,000 VAC
- PROOF TESTED OVER ENTIRE SURFACE AT 40,000 VAC
- RECOMMENDED MAXIMUM USE VOLTAGE 36,000 VAC

Stock #	Size	Weight/Ln.Ft.
SB636	3' x 30'	10.7 lbs.

Color: Black. Sold in cut lengths and full rolls. Optional Bevel.

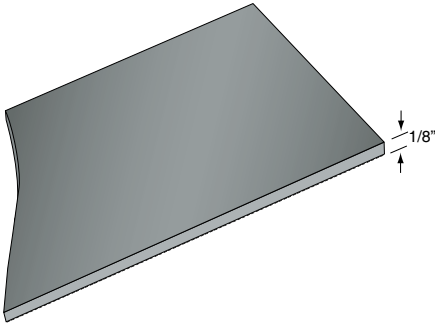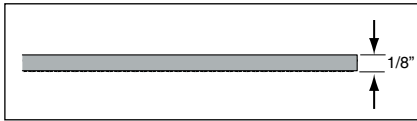

MIL SPEC SMOOTH TOP SWITCHBOARD MATTING

- Conforms to MIL SPEC. MIL-DTL-155626, Type II.
- This specification is approved for use by all interested Commands of the Department of the Navy and the Marine Corps and is available for use by all other Departments and Agencies of the Department of Defense.





- Dielectric Test Voltage 30,000 VAC
- Proof Tested Over Entire Surface At 15,000 VAC
- Recommended Maximum Use Voltage 3,000 VAC

MIL SPEC SMOOTH TOP SWITCHBOARD MATTING

Stock No.	Size	Weight/per roll
SSB36	36" x 75'	245.00 lbs

Color: Black, Blue, Green. Full rolls only. 1/8" Thick.

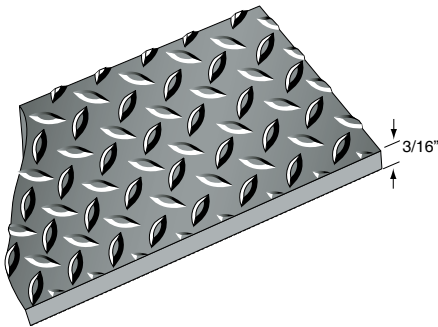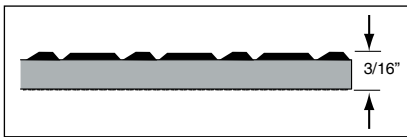

MIL SPEC DIAMOND SWITCHBOARD MATTING

- Conforms to MIL SPEC. MIL-DTL-155626, Type III as amended.
- This specification is approved for use by all interested Commands of the Department of the Navy and the Marine Corps and is available for use by all Departments and Agencies of the Department of Defense.



- Dielectric Test Voltage 30,000 VAC
- Proof Tested Over Entire Surface At 15,000 VAC
- Recommended Maximum Use Voltage 3,000 VAC

MIL SPEC DIAMOND SWITCHBOARD MATTING

Stock No.	Size	Weight/per roll
DSB36	36" x 75'	252.00 lbs.

Color: Gray. Full rolls only. 3/16" Thick.



DUAL PURPOSE Dielectric Anti-Fatigue Mats



DUAL PURPOSE DIELECTRIC

- Quarter inch thick, ASTM-D178, corrugated or diamond surfaced switch-board mats laminated to a 3/8" thick, super resilient polymeric sponge base provides employees a comfortable work surface to stand on while providing protection from accidental electrical shock.
- Rhino switchboard conforms to OSHA requirements for electrical protective devices with certification engraved on back.
- Rhino Dual-Purpose switch board matting also meets the optional requirements cited by ASTM for flame resistance, ozone resistance and oil resistance.



**AVAILABLE IN CORRUGATED
OR DIAMOND SURFACE**

DUAL PURPOSE DIELECTRIC ANTI-FATIGUE

Stock No.	Sizes	App. Wt.
DP-2436	2' X 3'	15.0 lbs.
DP-3648	3' X 4'	30.0 lbs.
DP-3660	3' X 5'	37.5 lbs.

DUAL PURPOSE CUT LENGTHS

Stock No.	Sizes	App. Wt./lin.ft.
DP-36	3' x 75'	7.5 lbs.
DP-48	4' x 75'	10.0 lbs.

Color: Black only. For Diamond surface, add the letter "D".
5/8" Thick.



FUSE BOX SAFETY MAT Dielectric Anti-Fatigue Mats



FUSE BOX SAFETY MAT

- Quarter inch thick, ASTM-D178, corrugated or diamond surfaced switch-board mats laminated to a 3/4" thick, super resilient polymeric sponge base provides employees a comfortable work surface to stand on while providing protection from accidental electrical shock.
- Convenient, portable size goes with you anywhere and gives you immediate protection right at the worksite.
- Rhino switchboard conforms to OSHA requirements for electrical protective devices with certification engraved on back.
- Rhino Fuse Box Safety Mat also meets the optional requirements cited by ASTM for flame resistance, ozone resistance and oil resistance.



FUSE BOX SAFETY MAT

Stock No.	Sizes	Weight
FB1618	16" x 18" x 1"	2.5 lbs.

Color: Black

