

WEARWELL[®]

ERGONOMIC SURFACES FOR INDUSTRIAL ATHLETES



BECAUSE THE SURFACE MATTERS



24/Seven® Mat



Diamond-Plate



Rejuvenator® Sqare Design



Rejuvenator® Square Design



Tile Top



ErgoDeck® w/Integrated No-Slip Cleats Open



Our Mission

Our mission at Wearwell is to champion standing workers. To us, they are athletes — coached, physically trained, outfitted in protective gear, and ready to go to battle for their team.

But every playing field is different, and every athlete must overcome unique challenges. This is where Wearwell comes in. Our passion is designing the world's best ergonomic surfaces to give workers — and the companies they work for — a competitive edge.

These days, competition is global, and there's little margin for error. That's why Wearwell works on-site with safety managers and facility owners to create the best flooring solutions possible. Supplying your team with the latest in matting and flooring technology can give them the competitive edge they need to win.

I ask you to join us in envisioning a world where standing workers maximize their productivity. Where slips and falls are virtually eliminated. Where worker morale is at an all-time high. Where teams compete at the highest levels and win!

At Wearwell, we help create such a world. We are champions of industrial athletes everywhere — the loyal, hard-working folks who get things done. Because for them, the surface matters.

Thank you for choosing Wearwell as your partner for ergonomic flooring and matting solutions.



Elliot Greenberg
Chairman
Wearwell, Inc.

Table of Contents









2	FACILITY TYPE
3	TERMS AND DEFINITIONS
6	QUICK REFERENCE
8	VALUE CONTINUUM
10	WATCH OUT!
11	PROVEN COST REDUCTION
12	MANUFACTURING/FULFILLMENT
14	Flooring
24	Matting/Dual Layer
32	PVC and Rubber
44	Sponge
50	HIGH VOLTAGE
55	DATA CENTER / ESD
62	MAINTENANCE
68	LAB
75	RUNNERS
79	ENTRANCE
82	ACCESSORIES
84	PRODUCT SPECIFICATIONS

FOR CLEANING INSTRUCTIONS
AND CHEMICAL RESISTANCE
visit www.wearwell.com

Industry Icons


	Airlines
	Agriculture
	Assembly and Fulfillment
	Contractor/MRO
	Food Processing
	Health/Lab/Pharmacy
	Machining
	Manufacturing
	Oil, Gas, Mining, Energy
	Retail, Office, Education
	Transportation

Application Icons

	Wet
	Dry
	Slippery
	Oily
	Recycled Material
	Custom 1 (Length)
	Custom 2 (Length/Width)
	Custom 3 (Full Custom)

Easy To Understand Part Numbers

Part numbers are divided into four sections. The first is the code for the product family; the second is the thickness of the product; the third describes width and length; and the code at the end indicates unique characteristics (when applicable) and color.

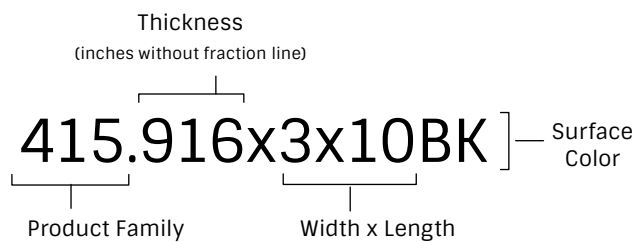

Abbreviations used in this catalog

D-P: Diamond-Plate
HD: Heavy Duty
GR: Grease Resistant
GP: Grease Proof

CFR: Cutting Fluid Resistant Rubber
NBR: Nitrile Rubber
w/GS: with GRITSHIELD™

With Borders

BYL black w/yellow
BOR black w/orange
CHV black w/chevron
GNYL green w/yellow
RDYL red w/yellow
CHYL charcoal w/yellow


Color Chart

BK black **SB** sky blue
BL blue **TC** terra cotta
CH charcoal **WH** white
GY gray **YL** yellow
OR orange **GN** green
RD red

Note: Colors may vary slightly from lot to lot

The Right Step

We organized this catalog with the industrial facility in mind. Different areas have unique working conditions and surfaces. We matched products that solve the challenges for the specific area and coded them accordingly. We hope it helps you find what you need easily.

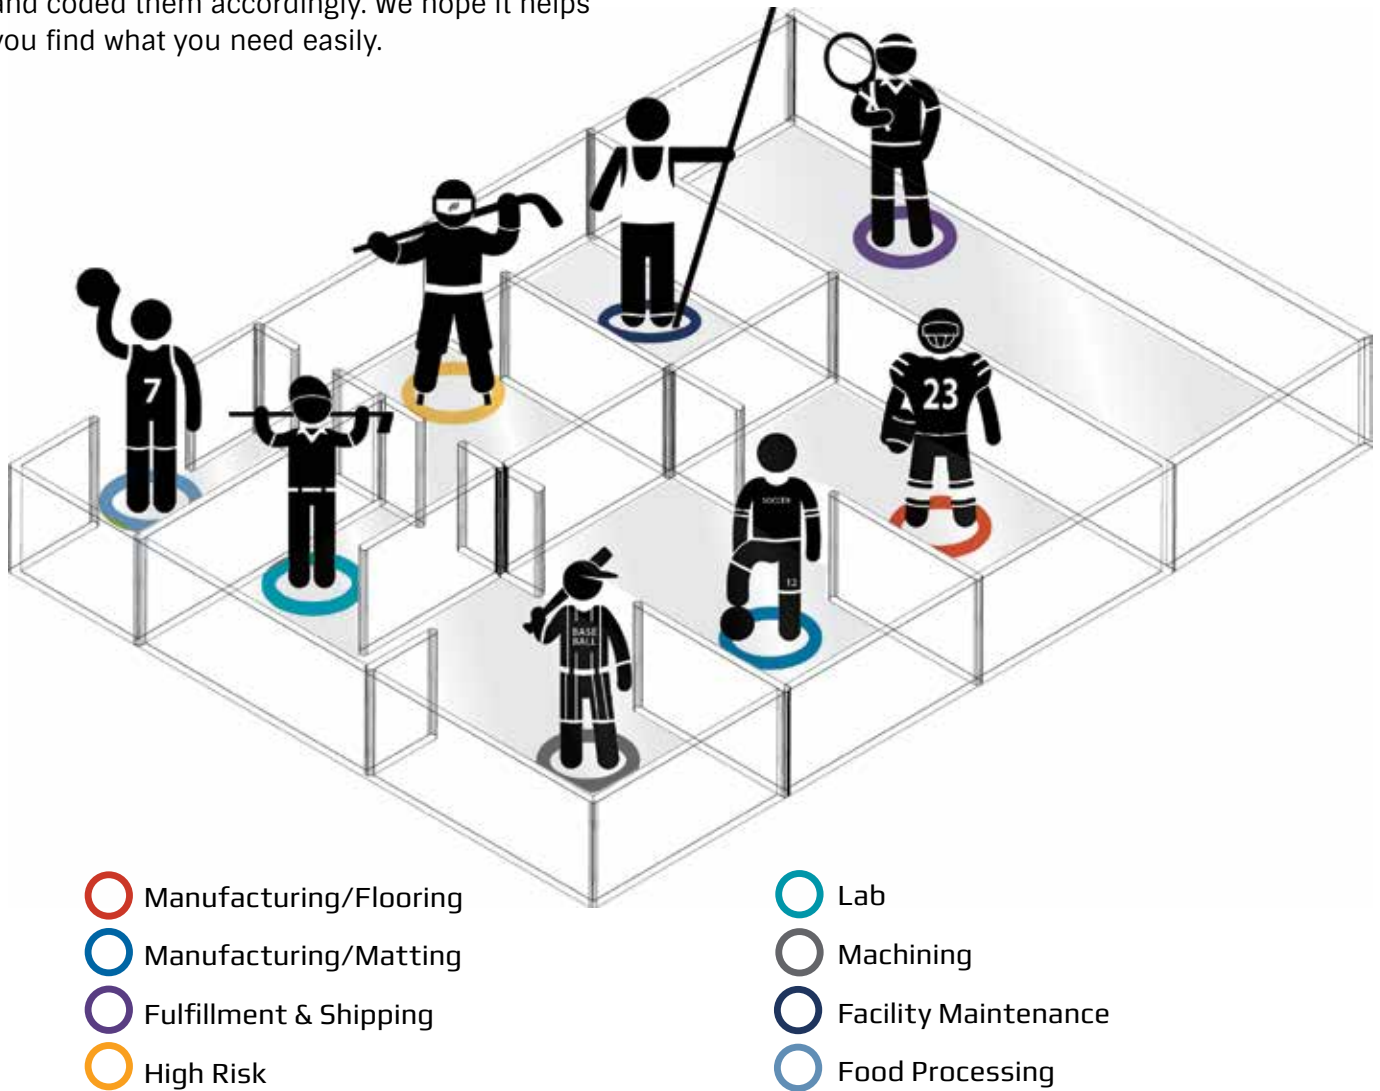

TERMS AND DEFINITIONS

COF (Coefficient of Friction) — The degree of traction provided by a surface. It is a measurement of the force that must be exerted before an object slips. The higher the number, the better the traction. OSHA recommends a COF of .5 in dry areas and .25 in wet. The ADA recommends .6 on flat surfaces and .8 on ramps.

Compression Deflection — The softness or comfort level of a sponge mat. A higher number indicates a softer material. Wearwell considers .10-.20 the ideal range.

Customization — Providing flooring and matting products with special (1) lengths, (2) lengths and widths, or (3) shapes and configurations (also referred to as Full Custom — this is a Wearwell specialty!

GRITSHIELD™ — Our unique grit system that improves traction and is even available over colors!

Resilience — A material's ability to return to its original form after being compressed.

Taber Abrasion — A way of measuring how well a mat's surface withstands wear. The less weight a sample loses during a Taber abrasion test, the more durable the product tends to be.

Tensile Strength — A measure of the tear strength of a material. The higher the psi, the stronger the mat.

A Vision, A Story, A Philosophy. . .

We're champions for the standing worker. To us, they're athletes on the job. And just like a professional athlete, the Industrial Athlete deserves and needs the best possible field conditions.

Virtually every sport takes place on a specially designed surface, whether it's a court, a field, or a rink. Like athletes, manufacturing workers exert themselves every day. These industrial athletes deserve to test their limits on surfaces that have been engineered to support them and their work.

We design the world's best surfaces to give them a competitive edge while they're on the clock, reducing aches, pains, fatigue, and potential for injury, so they can enjoy their life *on* and *off* the clock.

We offer innovative solutions that improve the stats

Cost Avoidance
\$42,152

Average cost of
a single floor
related injury

Safety 69%

of occupational injuries
are from slips, trips,
falls and strains



Innovation

Our dedication to innovation, safety and productivity for the industrial athlete is why Wearwell is the category leader in industrial and safety matting. Proper design can be the difference between a mat that fails and one that's perfectly suited to the job. We have a long history of firsts in innovation.

- ▶ The first Diamond-Plate Anti-Fatigue mats, now the #1 seller in the industry!
- ▶ The first double-thick "UltraSoft" Diamond Plate mats
- ▶ The first ESD Anti-Fatigue mats for static control
- ▶ The first Gritted Anti-Fatigue mats for slip prevention
- ▶ The first welding mats
- ▶ The first Cutting Fluid Resistant mats
- ▶ The first positive locking modular tiles & ergonomic flooring, now the fastest growing anti-fatigue category
- ▶ The first modular 100% Urethane mats, the highest performance mats on the market
- ▶ The first 18"x18" (46cm x 46cm) Ergonomic Floor Tiles, a distinct category unto itself

**Reduced
Absenteeism
3.7**

The average number of missed work days due to occupational injuries



Quick Reference

Quick Reference			Page	Suitable Environment			Custom Configurations			Additional Benefits					Common Industries								
				Dry	Wet	Oily	Slippery	Cut Length	Width & Length	Len./Wid./Shape	Cart Friendly	Grate Friendly	Modular	Non-Conductive	Static-Dissipative	Machining	Gen. Mfg	Auto / OEM	Transportation	Energy/Oil/Gas	Fulfillment/Dstr.	Contractor/MRO	Lab/Pharmacy
Group Code	Group Name		092	Perma Tack	66, 74	0							0				0	0				0	
095	Clean Room Mat	66, 74, 81	0										0				0				0	0	
110	InVision	30	0														0				0		
110	Safety Message Invision Mats NEW	30	0														0	0	0		0		
222	Sanitizing Footbath Mat	43		0																	0	0	
223	Sole-Solution Foot Bath NEW	43, 67	0	0	0	0										0		0		0	0	0	
229	Mud Chucker™	67, 81		0															0		0	0	
300	Starting Line NEW	47	0	0			0	0	0								0			0	0	0	
305	HD Corrugated	76	0				0				0						0	0		0			
347	H.T. Runner NEW	76	0				0										0	0					
356	Radial Runner	78	0				0				0						0			0		0	
381	Std Corrugated Vinyl	77	0				0				0						0		0		0		
383	Textured Kleen-Rite	78	0				0				0						0			0		0	
385	Diamond-Plate	77	0				0				0						0	0	0				
391	KleenSweep	78	0				0				0									0		0	
405	Enviro Mat	77	0				0				0						0	0		0			
414	UltraSoft D-P	26-27, 46	0						0								0	0	0			0	
415	D-P SpongeCote®	26-27, 46	0						0								0	0	0			0	
416	D-P w/GS UltraSoft	26-27				0			0								0	0					
419	UltraSoft Tile-Top™ AM	72-73	0						0													0	
420	Tile-Top™ AM	72-73	0						0													0	
423	Soft Rock NEW	28	0						0								0	0	0		0	0	
423M	Modular Soft Rock NEW	28	0									0					0	0	0		0	0	
425	Grate-Deck NEW	28									0	0					0	0	0				
427	Soft Step	49	0				0													0			
431	Corrugated SpongeCote®	31	0				0													0			
433	ComfortPro™	31	0				0													0			
438	LightWorks Inspection Mat	29	0				0											0				0	
440	Ultra-Tred ArmorCote	47	0				0													0			
442	Deluxe Tuf Sponge	48	0				0													0			
444	Deluxe Soft Step	49	0				0													0			
447	WeldSafe®	29	0						0								0	0					
451	Tuf Sponge	48	0				0													0			
452	Diamond Tuf Sponge	48	0				0													0			
454	Ortho Stand™	41		0													0	0					
459	Endurable	49	0				0													0			
468	WORKRITE II NEW	40	0	0													0					0	
470-DP	Modular D-P GP	40			0				0			0			0	0	0						
470-GR	Modular D-P GR	40		0					0			0				0	0			0			
472-GR	Modular WorkSafe® Light GR	41		0					0			0				0	0	0					
472-GP	Modular WorkSafe® Light GP	41			0				0			0			0	0	0						
474	WorkRite	43		0												0						0	
475	Kushion Walk	76		0			0			0	0				0	0	0						
476-GR	Industrial WorkSafe® GR	40		0												0	0	0					
476-NBR	Industrial WorkSafe® NBR	40			0											0	0						
477	WorkSafe® GR	41		0					0			0				0		0				0	
478	WorkSafe® Light CFR	40			0										0	0	0						
480	Abrasive Coated Kushion Walk	76				0	0			0	0					0	0						
482	Grade "A"®	43			0																	0	
494	Tile-Top™ Select	72-73	0				0									0				0		0	
495	D-P Select UltraSoft	26-27	0				0									0		0					
496	SMART® Tile-Top™	72-73	0				0									0				0		0	
497	SMART® D-P UltraSoft	26-27	0				0									0		0		0			
502	Rejuvenator® Squared	14, 46, 70	0						0			0						0	0		0	0	
503	Rejuvenator® Domed	14, 46, 70	0						0			0						0	0		0	0	


Quick Reference

Quick Reference			Suitable Environment				Custom Configurations			Additional Benefits					Common Industries								
Group Code	Group Name	Page	Dry	Wet	Oily	Slippery	Cut Length	Width & Length	Len./Wid./Shape	Cart Friendly	Grate Friendly	Modular	Non-Conductive	Static-Dissipative	Machining	Gen. Mfg	Auto / OEM	Transportation	Energy/Oil/Gas	Fulfillment/dstr.	Contractor/MRO	Lab/Pharmacy	Food Processing
513	SubStance (See Website)		0				0													0			
514	ROVER™ NEW	64	0									0				0	0	0		0	0		
515	ROVER™	64	0									0				0	0	0		0	0		
518	Comfort2Go™	65	0													0	0				0		
540	F.I.T.™ Open	22			0				0			0			0	0							0
541	F.I.T.™ Solid	23			0				0			0			0	0				0			
542	F.I.T.™ Open w/GS	23				0			0			0			0	0	0						
543	F.I.T.™ Solid w/GS	23				0			0			0			0	0	0						
544	F.I.T.™ Kits	36			0							0			0	0	0						
545	F.I.T.™ Kits w/GS	36				0						0			0	0	0						
546	F.I.T.™ Emergency Shower / Eyewash	37			0							0			0	0	0						
552	ErgoDeck® w/Integrated No-Slip Cleats Solid	20, 34				0			0		0	0			0	0	0						
552	ErgoDeck® No-Slip Kit Solid	34				0					0	0			0	0	0						
553	ErgoDeck® w/Integrated No-Slip Cleats Open	20, 34				0			0		0	0			0	0	0						
553	ErgoDeck® No-Slip Kit Open	34				0					0	0			0	0	0						
554	ErgoDeck® w/Steel No-Slip Cleats Solid	21				0			0		0	0							0				
555	ErgoDeck® w/Steel No-Slip Cleats Open	21				0			0		0	0							0				
556	ErgoDeck® Comfort Solid	16			0				0			0				0	0	0	0				
556	ErgoDeck® Comfort Kit	35			0							0				0	0			0			
557	ErgoDeck® ESD	57		0					0	0		0		0		0	0					0	
558	ErgoDeck® Comfort Open	16			0				0			0				0	0	0	0				
560	ErgoDeck® HD Open	18			0				0	0	0	0			0	0	0						
561	ErgoDeck® HD Open w/GS	18				0			0	0	0	0			0	0	0						
562	ErgoDeck® HD Solid	18			0				0	0	0	0			0	0	0						
563	ErgoDeck® HD Solid w/GS	18				0			0	0	0	0			0	0	0						
564	ErgoDeck® General Purpose Open	17			0				0	0		0			0	0	0						
565	ErgoDeck® General Purpose Open w/GS	17				0			0	0		0			0	0	0						
566	ErgoDeck® General Purpose Solid	17			0				0	0		0			0	0	0						
567	ErgoDeck® General Purpose Solid w/GS	17				0			0	0		0			0	0	0						
568	ErgoDeck® Smooth NEW	16													0	0	0						
570-CFR	24/Seven® Solid CFR	38			0				0	0		0			0	0	0						
570-GR	24/Seven® Solid GR	39		0					0	0		0				0	0						
570-NBR	24/Seven® Solid NBR	39			0				0	0		0			0	0	0						
572-CFR	24/Seven® CFR	38			0				0			0			0	0	0						
572-GR	24/Seven® GR	39		0					0			0				0	0						
572-NBR	24/Seven® NBR	39			0				0			0			0	0	0						
574-CFR	24/Seven® Solid w/GS CFR	38				0			0	0		0			0	0	0						
574-NBR	24/Seven® Solid w/GS NBR	39				0			0	0		0			0	0	0						
576-CFR	24/Seven® w/GS CFR	38				0			0			0			0	0	0						
576-NBR	24/Seven® w/GS NBR	39				0			0			0			0	0	0						
580	Autoclavable Mat	74			0																	0	
701	D-P Switchboard Matting	53	0				0			0			0			0	0		0				
702	Corrugated Switchboard Mat	53	0				0			0			0			0	0		0				
710	Marbelized Military Switchboard Mat	54	0				0			0			0			0	0		0				
711	Smooth Military Switchboard Mat	54	0				0			0			0			0	0		0				
712	D-P Military Switchboard	54	0				0			0			0			0	0		0				
720	Double Duty Switchbrd Corrgted Mat	53	0				0						0			0	0		0				
785	Electrically Conductive Runner	57	0				0			0				0		0	0					0	
786	UltraSoft Electrically Conductive Mat	57	0						0					0		0	0					0	
788	Modular D-P ESD	58	0						0			0		0		0	0					0	
789	Modular WorkSafe® Light ESD	58	0						0				0		0	0	0					0	
791	Static Dissipative Anti-Fatigue	59	0				0							0		0	0					0	
793	ESD Work Surface Material	60	0											0		0	0						0

A Product For Every Budget!





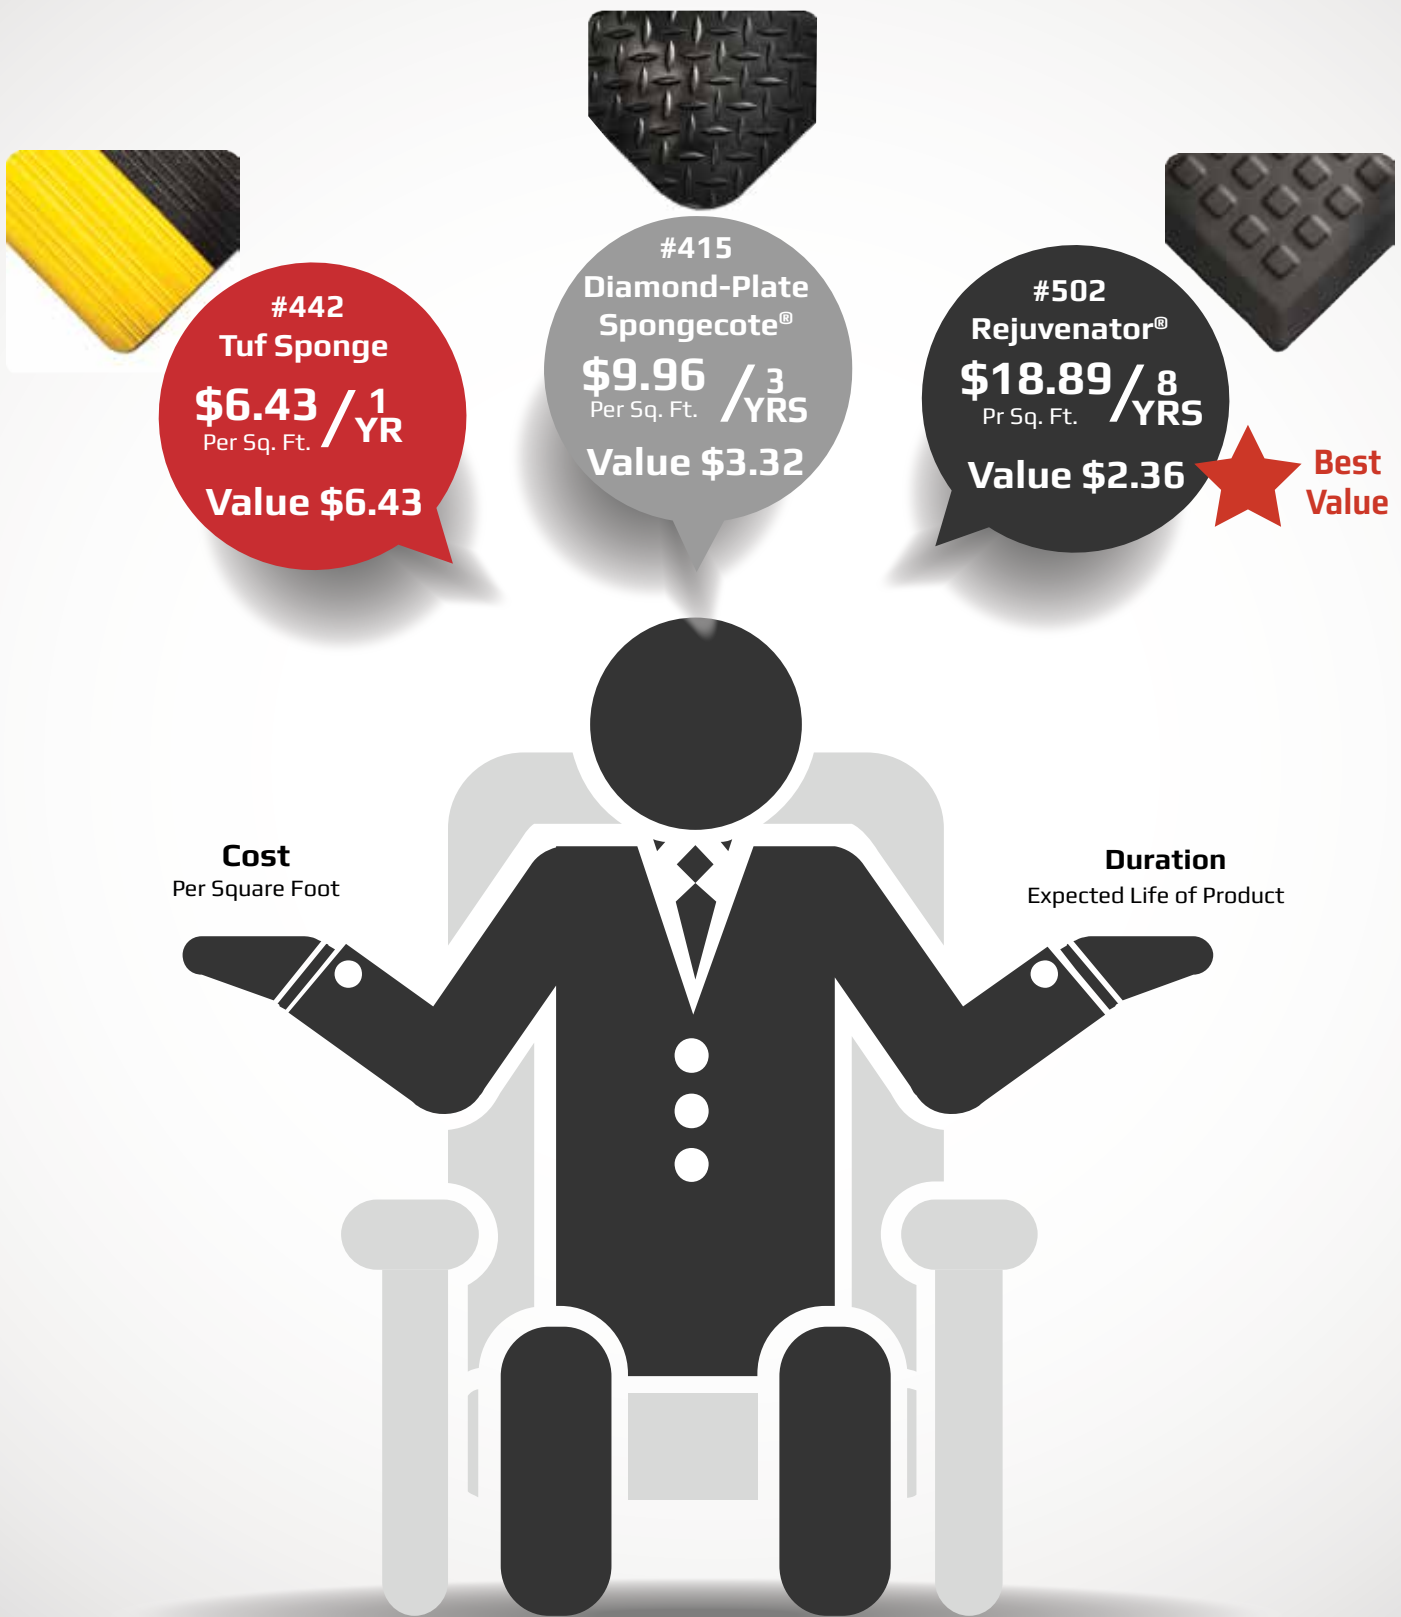


Wearwell manufactures so many different types of products, because there are so many unique applications for their use. But when they're intended for the same environment which is the better value?

Divide the price of the product per square foot by the expected wear of the product.



The specifics of each application and suitable products will vary.
Your Wearwell Sales Professional is happy to assist in completing a comparison for your specific needs.

Why Are The Number Of Warranty & Wear Years Different?

Warranty	Vs.	Wear
Definition: a written guarantee		Definition: an expected number of years of life in-use
Determining Factors		
 <p>Materials & Workmanship</p> <p>LIFE TIME</p> <p>4 YEARS</p> <p>3 YEARS</p> <p>1 YEAR</p> <p>Warranty Period</p>		 <p>Environment & Application</p>  <p>Number of Shifts</p>
Actions Taken		
 <p>Repair</p>  <p>Swap</p>  <p>Reimburse</p>		 <p>Replacement Cycle</p>



THE NEW WEARWELL LIFETIME WARRANTY

We're so confident in the quality and craftsmanship that we back our most popular products with a Lifetime warranty! Look for this symbol throughout the catalog and rest assured that we have you covered!

Don't Be Confused

A lifetime warranty is a statement of confidence in our manufacturing expertise and the quality of materials we use. Every application is different so replacement cycles will vary.

Let's Be Real

No matting or flooring product is indestructible.

If a competitor's warranty seems too good to be true, it probably is! Read the fine print.

WATCH OUT!


Match the right ergonomic matting and flooring solutions for the job

WATCH can:

1. Improve employee productivity
2. Reduce lost time
3. Reduce injuries and incidents
4. Upgrade facility aesthetics
5. Save money

The Right CHOICE

Knowing what to WATCH for provides knowledge for not only what to purchase, but when to replace

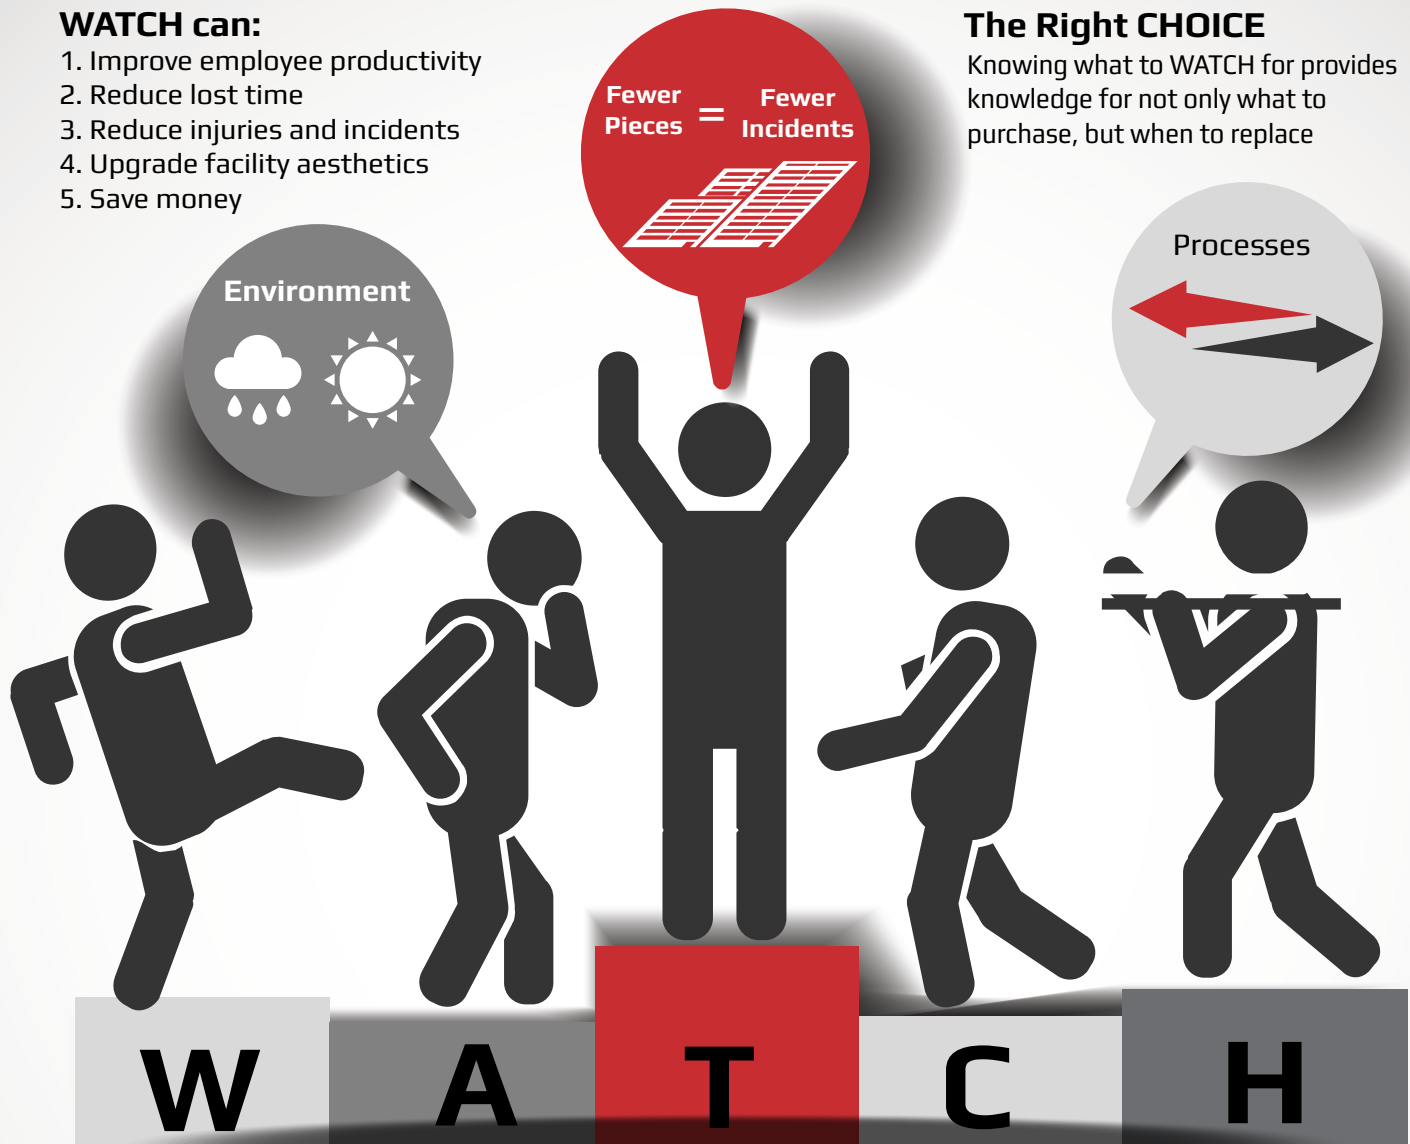

W

Wet



Visual Cues: pooling water, workers are slipping or are not sure-footed
Concerns: loss of productivity, slips or falls, and possible micro bacterial growth

A

Applications



Visual Cues: high-voltage signs, handling of static-sensitive products, presence of welding equipment or paint and finishing equipment
Concerns: employee safety, quality control, and productivity

T

Tile Separation



Visual Cues: Modular matting components that were once connected are now loose, haphazard pieces, interlocks torn
Concerns: trip hazards, work disruption and productivity loss due to constant repositioning

C

Caution



Visual Cues: Stacked mats, cardboard, pallets, or use of unconventional materials are clear indicators that the workforce is looking for standing relief. Mats that are torn or badly worn, or used in the wrong application
Concerns: trip hazards, lack of support, poor aesthetics, worker morale

H

How



Visual Cues: Workers are moving between workstations. If mat(s) are present, workers repeatedly step off and back onto mat(s).
Concerns: trip hazards, heel strike, and severe impacts if falls occur

Consider a Wearwell Site Survey.

Our Wearwell sales professionals are WATCH experts so you don't have to be!

Proven Cost Reduction

Anti-fatigue Matting

Reduces Costs And Increases Worker Productivity.

Before Installation

Surface: Concrete
Injury Rate **>3** per month
Absent Rate **>5.2%**

After Installation

Surface: Anti-Fatigue Mat
Injury Rate **<1** per month
Absent Rate **4%**


Improvement With Mats

Injury Reduced **70%**
Absenteeism Reduced **23%**



COST SAVINGS RELATED TO THE INSTALLATION OF ANTI-FATIGUE MATS


Productivity



Insurance Premium Reduction



Total Cost Savings



One Year Study



“Back in my football days, I fought hard *to hold* the line for my teammates. Sometimes bad turf made it all but impossible. Now, I work hard *on* the line and the field conditions matter even more. How can I fight for my team when I’m constantly battling aches and pains? Sorry, but concrete just doesn’t cut it! “
– John


From The Line Of Scrimmage To The End Zone, Increase Performance Of The Industrial Athletes On Your Team.

33%

Occupational Injuries

are musculoskeletal resulting from over exertion or bodily reaction caused from an incident or repetition.

Manufacturing

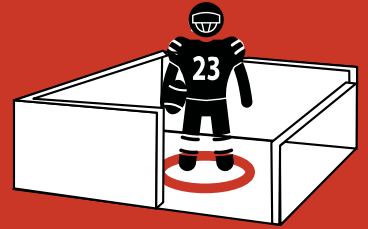

FLOORING

What is ergonomic flooring?

Ergonomic flooring is made up of interlocking tiles. This modular design lets users replace damaged sections easily and expand or contract ergonomic work areas as needed. Tight seams, dependable installation, and a patented fastening system hold tiles so they stay put in application until unzipped for easy replacement and reconfiguration. That can't be said for modular matting.

Why choose ergonomic flooring?

Because your team doesn't just stand — they move — ergonomic flooring is your team's best defense against slips, trips, falls, heel strike, back pain, and muscle aches. Available in multiple styles. You can create the right field of play for your field of work. You can even incorporate color to define paths, heighten safety, and use in place of temporary tapes.

How do I install ergonomic flooring?

Installing Wearwell ergonomic flooring is a snap. Each of our ergonomic flooring tiles has male connectors on two sides and female connectors on the other two sides. Simply connect the tiles and trim them to accommodate any space. No adhesives or fasteners required.

REJUVENATOR® FLOORING

Rejuvenator is a quality line of urethane matting and flooring — the undisputed record-holder when it comes to comfort, resilience, and long-term value.

PATENT US D653893



Rejuvenator® flooring, runners, and workstation mats will help your team stand stronger, longer. This ultimate product delivers the combination of durability, ergonomics, and awesome good looks! Manufactured from 100% urethane, this perennial all-star features an unparalleled lifetime-warranty. Simply put, we've engineered it to outlast and outperform any would-be rivals.

UNIVERSAL REJUVENATOR® EDGING			
ITEM NUMBER	SIZE	THICKNESS	COLOR
502.58x2x39F	2" x 39" (5cm x 96cm)	5/8" (16mm)	BK, YL
502.58x2x39M	2" x 39" (5cm x 96cm)	5/8" (16mm)	BK, YL


F: Female connector M: Male connector

All Rejuvenator® edging is universal to all Rejuvenator® tiles

End Mat w/Male Connectors (EMBK)	Center Mat (CBK)	End Mat w/Female Connectors (EFBK)
----------------------------------	------------------	------------------------------------

Need a longer runner?

Simply add more center mats for unlimited length!

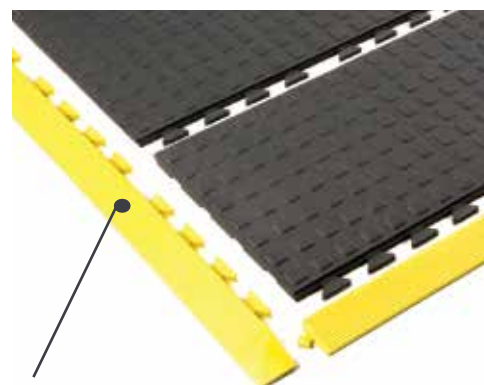

Rejuvenator flooring has 2" (5cm) wide ramps that provide a visual cue and transition for on-off access and are compatible with 502 and 503 flooring tiles.


502/503

Flooring



Available in domed and square designs, Rejuvenator® Flooring features large, 3' x 3' (91cm x 91cm) modules and 1' x 3' (30cm x 91cm) modules — that interlock on all four sides to customize on site virtually any flooring configuration. The interlock is incredibly effective and also hidden so the ergonomic floor you've created is seamless and stable underfoot. Having the ability to customize in one-foot increments and finish off with beveled ramps (yellow or black) sets it apart from all other urethane "wannabes."

ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x1x3BK	1' x 3' (30cm x 91cm)	5/8" (16mm)	BK
502.58x3x3BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x1x3BK	1' x 3' (30cm x 91cm)	5/8" (16mm)	BK
503.58x3x3BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK

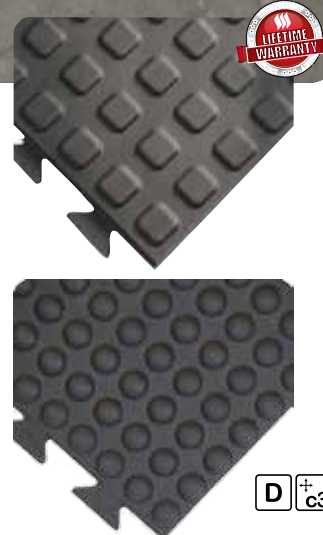

SPECIFICATIONS

Compound: Polyurethane
Edges: Optional 2" (5cm) - Wide Safety Edging
Warranty: Lifetime



502/503

Runner



Rejuvenator® Runners give you the option to create 2' (61cm)- and 3' (91cm)- wide runs of ergonomic matting. With a female end and a male end, all that's left is to connect as many centers as you need for your space. The molded-in ramps reduce installation time and costs.



ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK



C: Center
EF: End, Female
EM: End, Male

D i c1

SPECIFICATIONS

Compound: Polyurethane
Edges: Molded-in Safety Bevel
Warranty: Lifetime

502/503


Workstation Mat



Rejuvenator® Workstation Mats provide an out-of-the-box anti-fatigue solution for workers who spend most of their shift standing at one station. Rejuvenator® Workstation Mats feature the same awesome aesthetics as the rest of the Rejuvenator® products, so your facility can look clean and consistent.



ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x2x3BK	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK
502.58x2x5BK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x3x5BK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x2x3BK	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK
503.58x2x5BK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x3x5BK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK



D

SPECIFICATIONS

Compound: Polyurethane
Edges: Molded-in Safety Bevel
Warranty: Lifetime

ERGODECK® FLOORING

ErgoDeck® flooring was engineered with the evolving workplace in mind and can be used to cover large workspaces or custom work cells where traditional matting products fail. Think of ErgoDeck® as your "floor above a floor" — a high-performance field for your hardworking industrial athletes.

PATENT US 8,006,443B2 PATENT US D5210,650S



ErgoDeck® Flooring, with patented LockSafe® technology, holds secure but can be taken apart and reconnected on demand. Available in a wide variety of styles, ErgoDeck® is made of 100% silicone-free PVC and has the versatility to perform well in any position.

The robust 7/8" (22mm)-thick tiles install quickly with no tools required. Tiles from the different ErgoDeck® models can be combined and cut to size in 3" (8cm) increments, making ErgoDeck® a highly customizable ergonomic flooring solution.

Reduce costs and improve safety! Easily replace single tiles or sections as needed. Reduce slips, trips, and falls and severity of impact. Avoid costly floor repairs, cover cracks that may pose hazards, and improve aesthetics.

568

Smooth

NEW



Ideal for cart traffic and pivoting, ErgoDeck® Smooth™ is a high performance anti-fatigue surface that makes rolling, stopping and starting movements easier than ever.



Unlike soft mats that deform under load, ErgoDeck Smooth features a firm, lightly textured, smooth surface for rolling but without compromising traction.



Optional 6" (22cm) wide ramps are cart friendly, allowing easy on-off access.

ITEM NUMBER	SIZE	THICKNESS	COLOR
568.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH



SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) -
Wide Safety Ramps
Warranty: 3 Years

556/558

Comfort



ErgoDeck® Comfort is the optimum defense for fatigue in work areas where there is a lot of foot traffic but little or no cart traffic. The softer compound and spring-back underside compress and rebound underfoot for a "rubber-like" feel. Comfort Solid is especially suited to work areas that remain relatively dry or that have slight over-spray.



With its flexible PVC compound and springy underside, ErgoDeck® Comfort Open is engineered to cushion the impact of long-term standing and foot traffic in wet areas, providing resilient support underfoot while wicking away moisture.

Also available in convenient kits for workstations! See page 35 for more details.

ITEM NUMBER	SIZE	THICKNESS	COLOR
556 ErgoDeck® Comfort Solid			
556.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH
558 ErgoDeck® Comfort Open			
558.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH



SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) -
Wide Safety Ramps
Warranty: Lifetime



564-567

General Purpose



ErgoDeck® General Purpose is the best surface for team health and safety in areas with foot and light cart traffic. The softer compound compresses more underfoot, delivering enhanced fatigue relief, while the box-spring underside provides the necessary structure for rolling carts.



Designed for medium-duty work environments, ErgoDeck® General Purpose features a raised-texture surface that provides sure footing while enhancing workplace aesthetics. Regularly spaced openings in the Open variation remove moisture from the surface, facilitating drainage. GRITSHIELD™ material can be added to both the Solid and Open models to increase traction.



SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) -
Wide Safety Ramps
Warranty: **Lifetime (564, 566)**
1 Year (565, 567)



ITEM NUMBER	SIZE	THICKNESS	COLOR
564 ErgoDeck® General Purpose Open			
564.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH
564.78x18x18WH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	WH
565 ErgoDeck® General Purpose Open with GRITSHIELD™			
565.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH
566 ErgoDeck® General Purpose Solid			
566.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH
566.78x18x18WH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	WH
567 ErgoDeck® General Purpose Solid with GRITSHIELD™			
567.78x18x18CH-CS10	18" x 18" (46cm x 46 cm)	7/8" (22mm)	CH


ErgoDeck® Custom Colors



White (WH)



Blue (BL)




Green (GN)



Yellow (YL)



Orange (OR)



Red (RD)

PROGRAM COLOR GUIDELINES

HD Blue Solid and GP White Solid and White Drainage are in stock. For all others, minimum order quantity of 50 cases per part number is required. Ramps and corners are also available in colors. Call for minimums. Lead time is 4-6 weeks.

ERGODECK® FLOORING

ErgoDeck® flooring has a patented LockSafe® mechanism guarantees secure connections that can be "zipped" apart when needed. If a tile wears out, simply pop it out and replace it.

PATENT US 8,006,443B2 PATENT US D5210,650S



560-563

Heavy Duty



ErgoDeck® Heavy Duty is designed for work areas with heavy cart and foot traffic. The firmer compound lets carts roll with ease while the underside box-spring design provides structural support and impact absorption to reduce heel strike, even in multi-shift operations.



In the Open variation, the perforated design facilitates drainage while the firm structure of the 100% silicone-free PVC compound provides a solid foundation for carts and workers. GRITSHIELD™ can be added to both the Solid and Open models for added traction.



SPECIFICATIONS

Compound: PVC

Edges: Optional 6" (15cm) -
Wide Safety Ramps

Warranty: Lifetime (560, 562)
1 Year (563)



ITEM NUMBER	SIZE	THICKNESS	COLOR
560 ErgoDeck® Heavy Duty Open			
560.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BK
560.78x18x18BL-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BL
560.78x18x18GN-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	GN
560.78x18x18OR-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	OR
560.78x18x18RD-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	RD
560.78x18x18YL-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	YL
561 ErgoDeck® Heavy Duty Open w/GRITSHIELD™			
561.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BK
562 ErgoDeck® Heavy Duty Solid			
562.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BK
562.78x18x18BL-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BL
562.78x18x18GN-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	GN
562.78x18x18OR-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	OR
562.78x18x18RD-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	RD
562.78x18x18YL-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	YL
563 ErgoDeck® Heavy Duty Solid w/GRITSHIELD™			
563.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BK



560

Cable Bridge Kit



Exposed cables and hoses in the industrial workplace persistently pose trip hazards. A common fix is to secure them with tape, or to devise other temporary fixes. ErgoDeck® Cable Bridge Kit, when used with ErgoDeck® flooring, provides a more permanent solution.



ITEM NUMBER	SIZE	THICKNESS	COLOR
560.78x18	36" (91cm)	7/8" (22mm)	BLYL
560.78x15x15BLYL	15" x 15" (38cm x 38cm)	7/8" (22mm)	BLYL



SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) - Wide Safety Ramps
Warranty: 3 Years



560


Ramps / Corners



ErgoDeck® ramps and corners are compatible with all ErgoDeck® styles. Robust 6" (15cm) -wide ramps prevent trip hazards and allow easy access for wheeled traffic. Available with GRITSHIELD™ for additional traction.



ERGODECK® RAMPS AND CORNERS				
Universal to all ErgoDeck® products on pages 16-21				
DESCRIPTION	ITEM NUMBER	SIZE	COLOR	UOM
OUTSIDE CORNERS				
Heavy Duty	560.78x6x15x15-CS4	6" x 15" x 15" (15cm x 38cm x 38cm)	BK, YL	CS of 4
w/ GRITSHIELD	561.78x6x15x15-CS4	6" x 15" x 15" (15cm x 38cm x 38cm)	BK, YL	CS of 4
General Purpose	564.78x6x15x15-CS4	6" x 15" x 15" (15cm x 38cm x 38cm)	CH, WH	CS of 4
INSIDE CORNERS				
Heavy Duty	560.78x6x9x9BK	6" x 9" x 9" (15cm x 23cm x 23cm)	BK, YL	EA
w/ GRITSHIELD	561.78x6x9x9BK	6" x 9" x 9" (15cm x 23cm x 23cm)	BK, YL	EA
General Purpose	564.78x6x9x9CH	6" x 9" x 9" (15cm x 23cm x 23cm)	CH, WH	EA
RAMPS				
Heavy Duty	560.78x6x18-CS10	6" x 18" (15cm x 46cm)	BK, YL	CS of 10
w/ GRITSHIELD	561.78x6x18-CS10	6" x 18" (15cm x 46cm)	BK, YL	CS of 10
General Purpose	564.78x6x18-CS10	6" x 18" (15cm x 46cm)	CH, WH	CS of 10

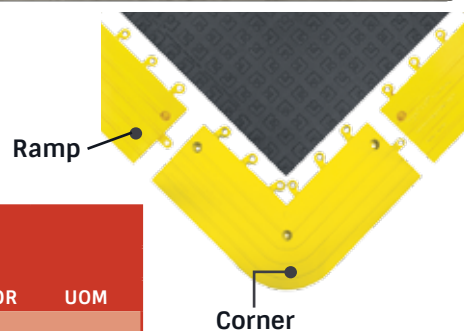

ERGODECK® NO-SLIP CLEATS

Cleats are tried-and-true gear for professional athletes who want winning performance and safety on the field. Whether on an oil rig or an engine line, ErgoDeck with No-Slip Cleats provides long-lasting traction and can endure harsh conditions and cleaning — even pressure washing!

PATENT US 8,006,443B2 PATENT US D5210,650S



552/553

Integrated No-Slip Cleats



ErgoDeck® flooring with Integrated No-Slip Cleats delivers a sure-footed work surface for maximum productivity, performance, and safety — even in the most demanding workplace conditions. The cleated design — modeled after the cleats that professional athletes wear for traction — overcomes harsh and slick workplace conditions.

While gritted mats provide some temporary traction, they wear with use and become slippery with saturation over time. ErgoDeck® with Integrated No-Slip Cleats, on the other hand, is built to last. Unlike gritted mats — which cannot be maintained and cleaned — ErgoDeck® with Integrated No-Slip Cleats can withstand power washing, scrubbing, and aggressive cleaning.




ITEM NUMBER	SIZE	THICKNESS	COLOR
552 ErgoDeck® w/Integrated No-Slip Cleats Solid			
552.78x18x18BK-CS10	18" x 18" (46cm X 46cm)	7/8" (22cm)	BK
553 ErgoDeck® w/Integrated No-Slip Cleats Open			
553.78x18x18BK-BK10	18" x 18" (46cm X 46cm)	7/8" (22cm)	BK

SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) - Wide Safety Ramps
Warranty: 3 Years



**INSTANT
ERGODECK MATS**
Need a workstation mat
with tons of traction?
Check out our ErgoDeck
Integrated No-Slip Kits
on page 34.
Optional edging can be
found on page 19.

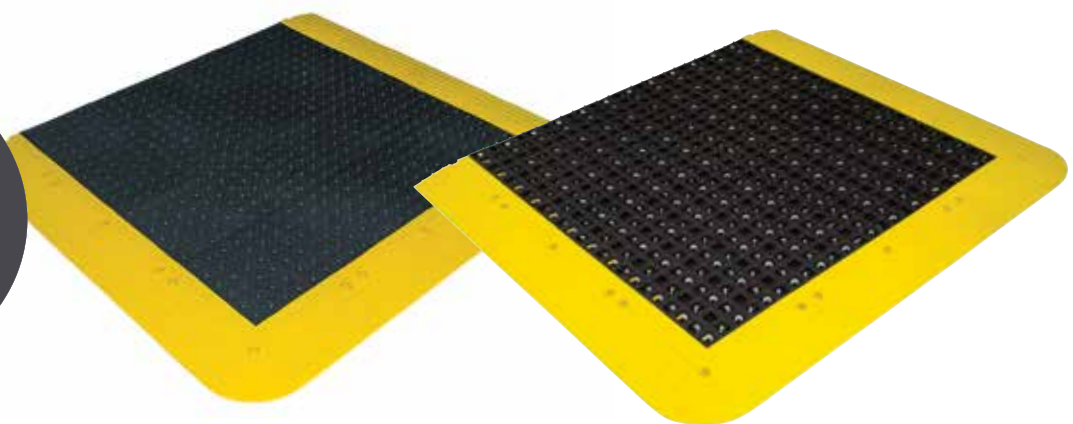



554/555

Steel No-Slip Cleats



The most robust cleated flooring product of them all, ErgoDeck® with Steel No-Slip Cleats is in a league of its own. Metal cleats are standard issue for professional athletes who want performance and protection on the field. Now, industrial athletes who need the ultimate degree of added traction can have proper gear, too!

The Open variation of ErgoDeck® with Steel No-Slip Cleats is designed to give workers a reliable surface to stand on in the most unforgiving wet environments. Thoroughly reliable, ErgoDeck® with Steel No-Slip Cleats maintains its traction in the face of aggressive cleaning, scrubbing, and pressure washing.

ITEM NUMBER	SIZE	THICKNESS	COLOR
554 ErgoDeck® w/Steel No-Slip Cleats Solid			
554.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22cm)	BK
555 ErgoDeck® w/Steel No-Slip Cleats Open			
555.78x18x18BK-BK10	18" x 18" (46cm x 46cm)	7/8" (22cm)	BK



SPECIFICATIONS

Compound: PVC
Edges: Optional 6" (15cm) -
Wide Safety Ramps
Warranty: 3 Years



SLIPS, TRIPS, AND FALLS*

\$41,531

the average cost of a slip and fall claim

3RD LEADING CAUSE

of missed work days

4TH LEADING CAUSE

of work-related death

42% INCREASE

in workers' compensation costs for slips and falls over the past 11 years

\$13.5 BILLION

the national total for same level-fall workers' compensation claims

* Source: National Safety Council Injury Facts, 2012 Ed.

F.I.T.™ SYSTEM

F.I.T.™ is the most versatile 12" x 12" (30cm x 30cm) interlocking ergonomic flooring system on the market. Its patented LockSafe® connections and lightweight design make handling and maintenance a snap.

US REG NO. 3,739,710



Today, workspaces are designed in a wide variety of shapes and sizes. That's where an easy, customizable solution like F.I.T.™ (Functional Interlocking Tiles) comes into play. The F.I.T.™ tiles are 5/8" (16mm) thick, 12" (30cm) x 12" (30cm) interconnecting, 100% silicone free and feature a lightweight, flexible design that allows tiles to be cut and reconnected every three inches. While the LockSafe® Positive Interlocking System prevents separation during use, one can easily unzip tiles to replace single pieces or sections as needed.


Thanks to versatility and durability, the F.I.T.™ system can be used for many otherwise challenging applications. Cover a less-than-ideal floor (such as cracked concrete) with a F.I.T.™ system to provide standing relief, safety underfoot, and traction for workers — not to mention world-class aesthetics. Assemblies of the F.I.T.™ tiles can also be rolled up without coming apart, making it an ideal custom liner for mobile tool and storage bins that require frequent maintenance.

UNIVERSAL F.I.T.™ EDGING

ITEM NUMBER	SIZE	THICKNESS	COLOR
540.58x3x12BK-CS20	3" x 12" (8cm x 30cm)	5/8" (16mm)	BK
540.58x3x12YL-CS20	3" x 12" (8cm x 30cm)	5/8" (16mm)	YL
540.58x3x15BK-CS4*	3" x 15" (8cm x 30cm)	5/8" (16mm)	BK
540.58x3x15YL-CS4*	3" x 15" (8cm x 30cm)	5/8" (16mm)	YL

All F.I.T.™ edging is universal to all F.I.T.™ tiles

*Ramp with corner

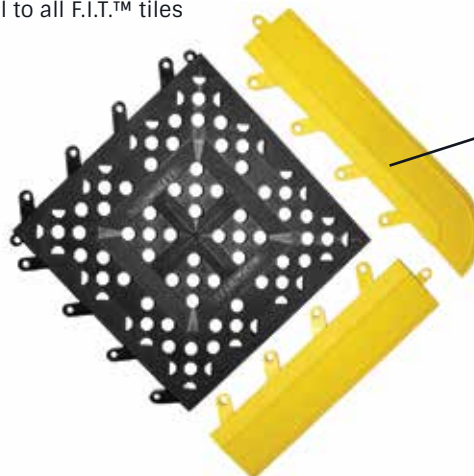

F.I.T. has 3" (8cm) - wide ramps that provide a visual cue and transition for on-off access. Compatible with all F.I.T. products and available with GRITSHIELD™ for improved traction.

541/543

F.I.T.™ Solid



F.I.T.™ Solid features a solid-top surface design for dry-area applications. Best for workspaces with only modest moisture and over-spray, these tiles are strong enough to withstand modest cart traffic while still delivering enough cushion to provide an ergonomic work surface for standing and mobile workers. Available with GRITSHIELD™ for extra traction.

ITEM NUMBER	SIZE	THICKNESS	COLOR
541.58x12x12BK-CS20	12" x 12" (30cm x 30cm)	5/8" (16mm)	BK
543.58x12x12BK-CS20*	12" x 12" (30cm x 30cm)	5/8" (16mm)	BK

* GRITSHIELD™ option



SPECIFICATIONS

Compound: PVC

Edges: Optional 3" (8cm) Wide

Warranty: 1 Year



540/542


F.I.T.™ Open



F.I.T.™ Open features an open-hole design for rapid and complete drainage of fluids. The surface slants towards the holes in the tiles to facilitate quick drainage and ensure a safe, dry standing area for workers. Use F.I.T.™ Open to convert wet and dirty floor areas into ergonomic work zones for your team. Available with GRITSHIELD™ for extra traction.

ITEM NUMBER	SIZE	THICKNESS	COLOR
540.58x12x12BK-CS20	12" x 12" (30cm x 30 cm)	5/8" (16mm)	BK
540.58x12x12GN-CS20	12" x 12" (30cm x 30 cm)	5/8" (16mm)	GN
540.58x12x12RD-CS20	12" x 12" (30cm x 30 cm)	5/8" (16mm)	RD
542.58x12x12BK-CS20 *	12" x 12" (30cm x 30 cm)	5/8" (16mm)	BK

* GRITSHIELD™ option




SPECIFICATIONS

Compound: PVC

Edges: Optional 3" (8cm) Wide

Warranty: 1 Year



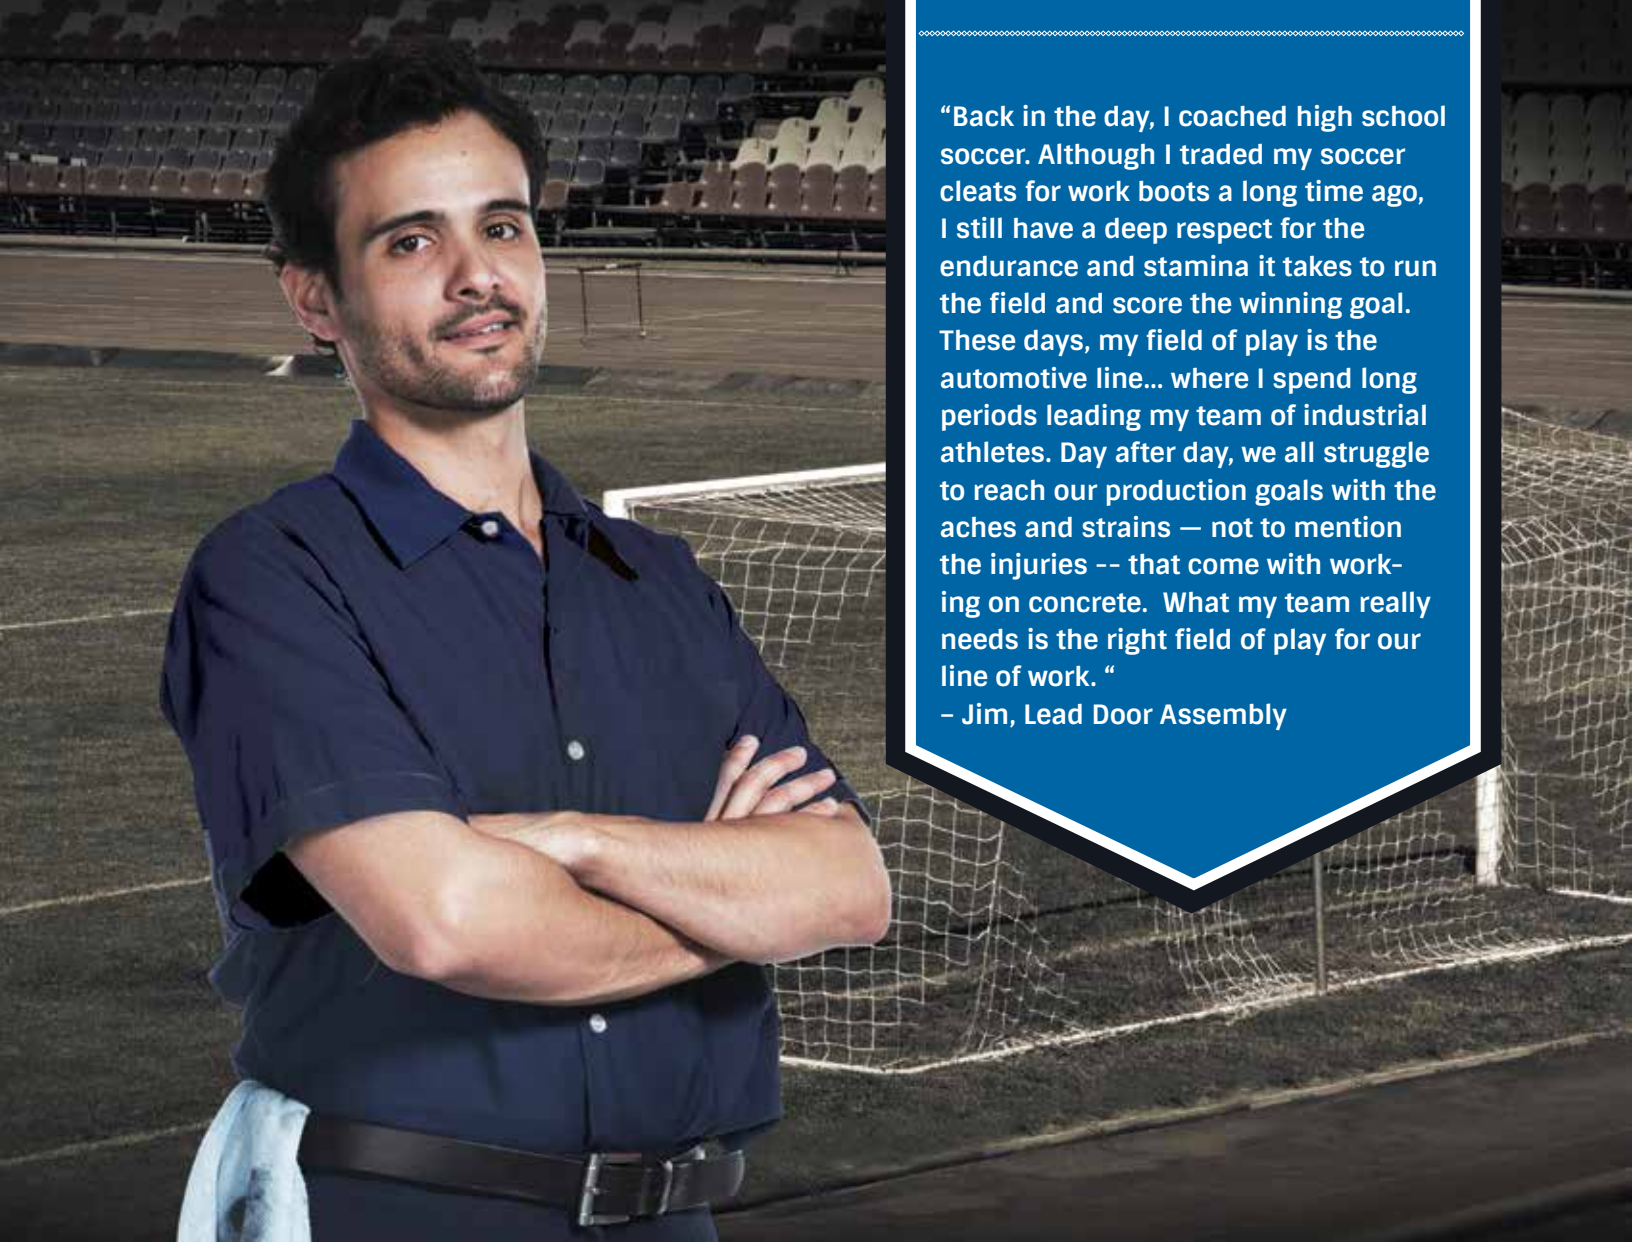

“Back in the day, I coached high school soccer. Although I traded my soccer cleats for work boots a long time ago, I still have a deep respect for the endurance and stamina it takes to run the field and score the winning goal. These days, my field of play is the automotive line... where I spend long periods leading my team of industrial athletes. Day after day, we all struggle to reach our production goals with the aches and strains — not to mention the injuries -- that come with working on concrete. What my team really needs is the right field of play for our line of work. “


– Jim, Lead Door Assembly

The goal is simple. Drive Up Performance While Upholding High Safety Standards.

50% IMPROVEMENT
in circulation and musculoskeletal health from
standing on an anti-fatigue mat*

* Source: medicalbillingandcoding.org and the University of Loughborough

Manufacturing

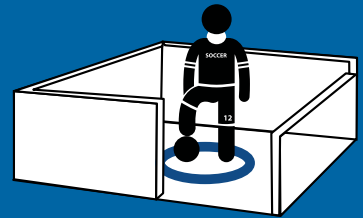

MATTING

What is ergonomic matting?

Ergonomic matting is the tried-and-true anti-fatigue solution for workstations and assembly lines. Made up of two layers — a surface and a sponge foundation — a mat should never be judged by its cover. Only Wearwell offers three types of sponge, giving you degrees of cushion, rebound, and resilience to choose from.

Why ergonomic matting?

Ergonomic matting provides support to standing workers throughout your facility. Specially designed mats also act as a safety measure, defending against workplace dangers such as slips, trips, and falls, as well as contamination and high voltage. Studies show, too, that matting delivers quantifiable improvements in productivity and lost time.

How do I install ergonomic matting?

Ergonomic matting comes in basic geometric shapes sized to fit in most standard workstation layouts. Manageable in size, they can be simply laid down or rolled out. Mats can also be cut to specified lengths, widths, and shapes. For larger and custom mats, consider handling and access to the area in question.

Dual layer mats

We have a variety of familiar top surfaces, but the difference lies beneath. Only Wearwell gives you a choice of three sponges. The Dual-layer, laminated mat has a place on your field if:

- The area is dry with medium to heavy foot traffic
- Life expectancy in use is important
- Goals include heightened morale, productivity, health, and safety

DIAMOND-PLATE



Wearwell was the first to introduce Diamond-Plate in 1989. Since then, we've continued to innovate. Today we offer more diamond-plate options than any competitor.



Choose your star treatment, based upon the needs of your facility.

Compound	Urethane US REG. NO: 3,739,714	PVC	Nitrile Rubber
Product Family	497	495	414, 415, 416
Description	Made from 100% recycled urethane sponge, SMART® is a durable matting base that combines comfort, ecology, and economy. Best suited for dry commercial and industrial applications, this green material is a Wearwell exclusive.	Flex-Link™ is a PVC sponge comparable to those used by our competitors, at a similar price point. The difference is our tapered Flex-Link™ base, which offers a larger usable ergonomic area, reduces trip hazards, and keeps our mats from sliding.	No. 1 in customer satisfaction for over 20 years, Nitricell® is the industry original. Consistently outperforming competitors in critical categories, including comfort, customization, performance, rebound, and standing area. Available with GRITSHIELD™ for improved traction.
Standing Area	★	★ ★	★ ★ ★
Rebound	★ ★	★	★ ★ ★
Life Expectancy	★	★ ★	★ ★ ★
Bevel	★	★ ★	★ ★ ★
Green	★ ★ ★	★	★
Price Point	★ ★ ★	★ ★	★
Value	★	★ ★	★ ★ ★
Customization	★	★	★ ★ ★
Warranty	1 Year	3 Years	Lifetime (414, 415) / 1 Year (416)
Application	D	D	D
Industry			
Colors			



497 SMART® Diamond-Plate			
SIZE	1" (25mm)-THICK ITEM NUMBERS	5/8" (16mm)-THICK ITEM NUMBERS	COLOR
2' x 3' (61cm x 91cm)	497.1x2x3	497.58x2x3	BK, BYL
2' x 75' (61cm x 23m)	497.1x2x75	497.58x2x75	BK, BYL
3' x 5' (91cm x 152cm)	497.1x3x5	497.58x3x5	BK, BYL
3' x 75' (91cm x 23m)	497.1x3x75	497.58x3x75	BK, BYL
4' x 75' (122cm x 23m)	497.1x4x75	497.58x4x75	BK, BYL
495 Flex-Link™ Diamond-Plate <i>Select</i>			
	15/16" (24mm) -THICK ITEM NUMBERS	9/16" (14mm)-THICK ITEM NUMBERS	
2' x 3' (61cm x 91cm)	495.1516x2x3	495.916x2x3	BK, BYL
2' x 75' (61cm x 23m)	495.1516x2x75	495.916x2x75	BK, BYL
3' x 5' (91cm x 152cm)	495.1516x3x5	495.916x3x5	BK, BYL
3' x 75' (91cm x 23m)	495.1516x3x75	495.916x3x75	BK, BYL
4' x 75' (122cm x 23m)	495.1516x4x75	495.916x4x75	BK, BYL
414 Nitricell® Diamond-Plate SpongeCote® UltraSoft			
	ITEM NUMBERS	THICKNESS	
2' x 3' (61cm x 91cm)	414.1516x2x3	15/16" (24mm)	BK, BYL, CHV, GY
2' x 75' (61cm x 23m)	414.1516x2x75	15/16" (24mm)	BK, BYL, CHV, GY
3' x 10' (91cm x 3m)	414.1516x3x10	15/16" (24mm)	BK, BYL, CHV, GY
3' x 20' (91cm x 6.1m)	414.1516x3x20	15/16" (24mm)	BK, BYL, CHV, GY
3' x 5' (91cm x 152cm)	414.1516x3x5	15/16" (24mm)	BK, BYL, CHV, GY
3' x 75' (91cm x 23m)	414.1516x3x75	15/16" (24mm)	BK, BYL, CHV, GY
4' x 75' (122cm x 23m)	414.1516x4x75	15/16" (24mm)	BK, BYL, CHV, GY
5' x 75' (152cm x 23m)	414.1516x5x75	15/16" (24mm)	BK, BYL
6' x 75' (1.9m x 23m)	414.1516x6x75	15/16" (24mm)	BK, BYL
415 Nitricell® Diamond-Plate SpongeCote®			
	ITEM NUMBERS	THICKNESS	
2' x 3' (61cm x 91cm)	415.916x2x3	9/16" (14mm)	BK, BYL, CHV, GY
2' x 75' (61cm x 23m)	415.916x2x75	9/16" (14mm)	BK, BYL, CHV, GY
3' x 10' (91cm x 3m)	415.916x3x10	9/16" (14mm)	BK, BYL, CHV, GY
3' x 20' (91cm x 6.1m)	415.916x3x20	9/16" (14mm)	BK, BYL, CHV, GY
3' x 5' (91cm x 152cm)	415.916x3x5	9/16" (14mm)	BK, BYL, CHV, GY
3' x 75' (91cm x 23m)	415.916x3x75	9/16" (14mm)	BK, BYL, CHV, GY
4' x 75' (122cm x 23m)	415.916x4x75	9/16" (14mm)	BK, BYL, CHV, GY
5' x 75' (152cm x 23m)	415.916x5x75	9/16" (14mm)	BK, BYL
6' x 75' (1.9m x 23m)	415.916x6x75	9/16" (14mm)	BK, BYL
416 Nitricell® Diamond-Plate w/GRITSHIELD™			
	15/16" (24mm)-THICK ITEM NUMBERS	9/16" (14mm)-THICK ITEM NUMBERS	
2' x 3' (61cm x 91cm)	416.1516x2x3	416.916x2x3	BK
2' x 75' (61cm x 23m)	416.1516x2x75	416.916x2x75	BK
3' x 10' (91cm x 3m)	416.1516x3x10	416.916x3x10	BK
3' x 5' (91cm x 152cm)	416.1516x3x5	416.916x3x5	BK
3' x 75' (91cm x 23m)	416.1516x3x75	416.916x3x75	BK
4' x 75' (122cm x 23m)	416.1516x4x75	416.916x4x75	BK

Available in cuts up to 75' (23m)

423

Soft Rock

NEW



The modern and adaptable matting solution for labs, hotels, retail outlets, and other facilities where workers stand on hard tiles and concrete. Easy to clean, Soft Rock is an affordable, anti-microbial solution that helps keep the workplace germ-free, meets ASTM G21-13 standards and is available in a wide array of colors.

SIZE	7/8"-THICK ITEM NUMBER	1/2"-THICK ITEM NUMBER	COLOR
2' x 3' (61cm x 91cm)	423.78x2x3	423.12x2x3	BS, CL, GT, SA, SL, TR
3' x 5' (91cm x 152cm)	425.78x3x5	425.12x3x5	BS, CL, GT, SA, SL, TR
3' x 75' (91cm x 23m)	423.78x3x75	423.12x3x75	BS, CL, GT, SA, SL, TR

Available in cuts up to 75'



SANDSTONE (SA)



BLUESTONE (BL)



TRAVERTINE (TR)



SLATE (SL)



GRANITE (GT)



COAL (CL)

SPECIFICATIONS

Compound: PVC over Nitricell® Sponge

Edges: Pre-bond No Trip Bevel

Warranty: 4 Years



NEW! SUMMER 2016!



423M

Modular Soft Rock



SPECIFICATIONS

Compound: PVC over Nitricell® Sponge

SIZE	7/8"-THICK ITEM NUMBER	1/2"-THICK ITEM NUMBER	COLOR
18" x 18" (46cm x 46cm)	423M.78x18X18	423M.12x18X18	BK
36" x 36" (91cm x 91cm)	423M.78x36X36	423M.12x36X36	BK

425

Grate-Deck



Grate-Deck is the new innovation in modular specialty. Utilize over grates, catwalks, anywhere you have a grated surface. Grate-Deck offers a solid anti-fatigue surface, that additionally improves the aesthetics of the area. The puzzle concept pieces can fit almost any configuration even 18" (46cm) with 36" (91cm) combinations.

SIZE	7/8"-THICK ITEM NUMBER	9/16"-THICK ITEM NUMBER	COLOR
18" x 18" (46cm x 46cm)	425.78x18X18	425.916x18X18	BK
36" x 36" (91cm x 91cm)	425.78x36X36	425.916x36X36	BK



SPECIFICATIONS

Compound: Nitricell Sponge protected by durable PVC surface on top and bottom



447

WeldSafe®



WeldSafe® has a specially formulated rubber surface that repels sparks and hot metal shards. With a melting point of over 500° Fahrenheit, the surface is perfect for welding workstations. Available in 3/8" (9.5mm) and 3/4" (19mm) thicknesses, WeldSafe® is backed with a nitrile-enhanced Nitricell® sponge base that absorbs repeated compression and bounces back to its original form better than any PVC sponge alternative. Accept no substitutes in your critical welding applications!

SIZE	7/8" (22mm)-THICK ITEM NUMBER	1/2" (14mm)-THICK ITEM NUMBER	COLOR
2' x 3' (61cm x 91cm)	447.78x2x3	447.916x2x3	BK
2' x 75' (61cm x 23m)	447.78x2x75	447.916x2x75	BK
3' x 5' (91cm x 23m)	447.78x3x5	447.916x3x5	BK
3' x 75' (91cm x 23m)	447.78x3x75	447.916x3x75	BK
4' x 75' (122cm x 23m)	447.78x4x75	447.916x4x75	BK

SPECIFICATIONS

Compound: Rubber over Nitricell® Sponge

Edges: Pre-Bond, No-Trip Bevel

Warranty: 4 Years



438

LightWorks Inspection Mat



LightWorks Inspection Mat is designed to enhance visual quality-control areas. The highly reflective white surface maximizes available light so imperfections don't go unnoticed during visual inspection. The clean aesthetic makes it a good choice for non-industrial environments, or for poorly lit areas where available light needs to be maximized. The Nitricell® sponge bounces back better than any PVC sponge alternative.

ITEM NUMBER	SIZE	THICKNESS	COLOR
438.12x3x50WH	3' x 50' (91cm x 15m)	1/2" (13mm)	WH
438.12x3x5WH	3' x 5' (91cm x 152cm)	1/2" (13mm)	WH

Available in cuts up to 50' (15m)

SPECIFICATIONS

Compound: PVC over Nitricell® sponge

Edges: Pre-Bond, No-Trip Bevel

Warranty: 4 Years



"We have a moral, as well as a legal, responsibility to send our employees home at the end of the workday in a condition no worse than when they come in that morning" — Ed. G Mohr, C.S.P. Coordinator, Ergonomics and Safety Engineering, General Motors Corporation, Auburn Hills, MI



Show your team spirit, promote your corporate brand, encourage safety, or provide instructions. With InVision, the possibilities are endless! InVision mats are premium anti-fatigue mats that feature full-color edge-to-edge graphics, letting you combine a custom message with health and well-being. Use branded InVision mats at trade shows to address your customers and fans, or at your facility to help keep your industrial athletes in the game.

Best of all, your graphic is protected from wear and tear! Printed on the underside, the imagery will withstand even the heaviest foot traffic. With an overall thickness of 7/8" (22mm), InVision mats feature a premium ultra-soft Nitricell® sponge base. Need only one safety mat? No problem. Low minimum quantities for custom are also available making InVision a practical way to personalize your facility, while increasing safety, or create a signature promotional item.

Custom mats are available in Smooth and Diamond-Plate surfaces, with or without Nitricell® sponge base. In-Stock safety mats are Diamond-Plate, with Nitricell® sponge base. See specific sizes below.

SPECIFICATIONS

Compound: PVC over Nitricell® Sponge

Edges: Pre-Bond, No-Trip Bevel

Warranty: 4 Years



Safety messages In Stock

ITEM NUMBER	SIZE	THICKNESS	SURFACE TEXTURE
110.78x2x3SAFETYDP	2' x 3' (61cm x 91cm)	7/8" (22mm)	DP
110.78x3x5SAFETYDP	3' x 5' (91cm x 152cm)	7/8" (22mm)	DP
110.78x2x3LOCKOUTDP	2' x 3' (61cm x 91cm)	7/8" (22mm)	DP
110.78x3x5LOCKOUTDP	3' x 5' (91cm x 152cm)	7/8" (22mm)	DP
110.78x2x3THINKDP	2' x 3' (61cm x 91cm)	7/8" (22mm)	DP
110.78x3x5 THINKDP	3' x 5' (91cm x 152cm)	7/8" (22mm)	DP

Custom Print

ITEM NUMBER	SIZE	THICKNESS	SURFACE TEXTURE
110.78x2x3	2' x 3' (61cm x 91cm)	7/8" (22mm)	DP, SM
110.78x3x5	3' x 5' (91cm x 152cm)	7/8" (22mm)	DP, SM

For custom please specify Smooth or Diamond-Plate when ordering.

Order in stock safety designs




110.78x2x3SAFETYDP



110.78x2x3LOCKOUTDP



110.78x3x5 THINKDP

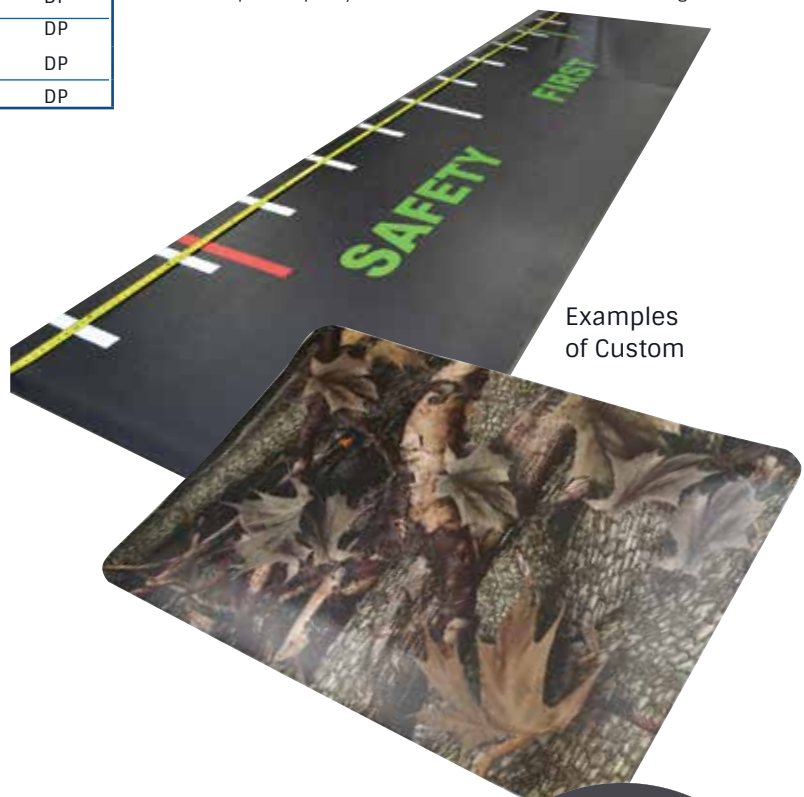

Examples of Custom

INVISION THE POSSIBILITIES

For more information about InVision and all other Wearwell flooring and matting products, visit www.Wearwell.com.

431

Corrugated SpongeCote® Mat



SpongeCote® Corrugated is a classic matting solution that offers durability and productivity enhancement. Popular long before Diamond-Plate surfaces became widely available, the signature surface pattern provides extra traction underfoot. The Flex-Link™ PVC sponge base is a budget-friendly fatigue-fighting solution.

ITEM NUMBER	SIZE	THICKNESS	COLOR
431.12x2x3	2' x 3' (61cm x 91cm)	1/2" (13mm)	BK, BYL
431.12x2x60BYL	2' x 60' (61cm x 18m)	1/2" (13mm)	BYL
431.12x2x75BK	2' x 75' (61cm x 23m)	1/2" (13mm)	BK
431.12x3x5BK	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK
431.12x3x5BYL	3' x 5' (91cm x 152cm)	1/2" (13mm)	BYL
431.12x3x60BYL	3' x 60' (91cm x 18m)	1/2" (13mm)	BYL
431.12x3x75BK	3' x 75' (91cm x 23m)	1/2" (13mm)	BK
431.12x4x75BK	4' x 75' (122cm x 23m)	1/2" (13mm)	BK
431.78x2x3	2' x 3' (61cm x 91cm)	7/8" (22mm)	BK, BYL
431.78x2x60BYL	2' x 60' (61cm x 18m)	7/8" (22mm)	BYL
431.78x2x75BK	2' x 75' (61cm x 23m)	7/8" (22mm)	BK
431.78x3x5	3' x 5' (91cm x 152cm)	7/8" (22mm)	BK, BYL
431.78x3x60BYL	3' x 60' (91cm x 18m)	7/8" (22mm)	BYL
431.78x3x75BK	3' x 75' (91cm x 23m)	7/8" (22mm)	BK
431.78x4x75BK	4' x 75' (122cm x 23m)	7/8" (22mm)	BK

Available in cuts up to 75' (23m) in Black and up to 60' (18m) in Black/Yellow

SPECIFICATIONS

Compound: PVC over Flex-Link™ Sponge

Edges: Safety Beveled

Warranty: 1 Year



433

ComfortPro™ Mat



ComfortPro™ is the best solution when a round-ribbed surface is a must. Easy to clean, the round-rib pattern provides good traction and is effective against slip hazards caused by spills. The Flex-Link™ PVC sponge base is a budget-friendly fatigue-fighting solution.

SIZE	1/2" (13mm)-THICK ITEM NUMBER	7/8" (22mm)-THICK ITEM NUMBER	COLOR
2' x 3' (61cm x 91cm)	433.12x2x3	433.78x2x3	BK
2' x 75' (61cm x 23m)	433.12x2x75	433.78x2x75	BK
3' x 5' (91cm x 152cm)	433.12x3x5	433.78x3x5	BK
3' x 75' (91cm x 23m)	433.12x3x75	433.78x3x75	BK
4' x 75' (122cm x 23m)	433.12x4x75	433.78x4x75	BK

Available in cuts up to 75' (23m)

SPECIFICATIONS

Compound: PVC over Flex-Link™ Sponge

Edges: Safety Beveled

Warranty: 1 Year





“As far as I’m concerned, there’s nothing more perfect than an afternoon at the ballpark. From the infield to the outfield, there’s a real pride in how the field looks and how it plays. In my department, the bases are loaded with skilled machinists like me, but all the skill in the world isn’t enough to overcome the painful effects of working on concrete. How can we win on a field like that?”
– Patrick, Press Operator

TOP PERFORMANCE DOESN'T HAPPEN BY LUCK


Productivity, efficiency and safety are part of every successful team’s winning strategy. Your industrial athletes need to stay focused and at the top of their game with the best surface under-foot. Hit it out of the park with high-quality, ergonomic mats and flooring.

OVER
17%

**Of All Disabling Workplace
Injuries Result From Falls***

* Source: OSHA, Identification And Prevention of Slips, Trips & Falls

Manufacturing

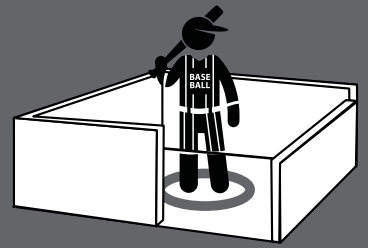

PVC AND RUBBER

Like track-and-field Olympians, today's workers are being asked to perform in a range of environments. Give your industrial athletes a competitive advantage with the right surface. PVC and rubber matting is the right call if:

- The area is wet, dry, or slippery
- Chemical resistance and water resistance are important
- Goals include drainage and elevation above fluids and delivering safety and support to workers

ERGODECK® KITS

Each ErgoDeck® Kit has everything you need to set up an ergonomic workstation in minutes. ErgoDeck® rivals most rubber mats for maintenance, chemical resistance, and performance. No other interlock can touch the secure LockSafe® system! Regardless of the conditions, ErgoDeck® delivers!



552 Integrated No-Slip Cleats Solid Kit



ErgoDeck® with Integrated No-Slip Cleats kits have all of the components necessary to create a non-slip workstation mat. No tools or cutting needed! Embedded in the tiles, No-Slip Cleats withstand pressure washing and other heavy cleaning. These ultra-rugged kits are perfect for individual workstations that reside in some of the toughest industrial environments.

ITEM NUMBER	SIZE	THICKNESS	COLOR
552.78x42x48BYL	42" x 48" (107cm x 122cm)	7/8" (22mm)	BYL
552.78x42x66BYL	42" x 66" (107cm x 1.7m)	7/8" (22mm)	BYL
552.78x42x84BYL	42" x 84" (107cm x 2.1m)	7/8" (22mm)	BYL



SPECIFICATIONS

Compound: PVC
Edges: 6" (15cm) -
 Wide YL Safety Ramps on 3 Sides
Warranty: 3 Years




553 Integrated No-Slip Cleats Open Kit



ErgoDeck® with Integrated No-Slip Cleats Open Kit is an easy and effective counter to the most slippery, wet work conditions. Built-in cleats deliver wear-resistant traction while the open-hole design wicks away water from the work surface.

ITEM NUMBER	SIZE	THICKNESS	COLOR
553.78x42x48BYL	42" x 48" (107cm x 122cm)	7/8" (22mm)	BYL
553.78x42x66BYL	42" x 66" (107cm x 1.7m)	7/8" (22mm)	BYL
553.78x42x84BYL	42" x 84" (107cm x 2.1m)	7/8" (22mm)	BYL



SPECIFICATIONS

Compound: PVC
Edges: 6" (15cm) -
 Wide YL Safety Ramps on 3 Sides
Warranty: 3 Years



556

Comfort Kit



Comprising a pre-selected set of our exclusive ErgoDeck® Comfort tiles — the ErgoDeck® Comfort Kit includes everything you need to create a safe, long-lasting, ergonomic workstation. 7/8" (22mm) -thick PVC, they are engineered to be as resilient as rubber. No cutting, gluing, or tools are required for assembly thanks to our LockSafe® Positive Interlocking System. Just snap the components together and you've got a high-performance standing solution versatile enough to cover wet or dry work areas.





SPECIFICATIONS

Compound: PVC
Edges: 6" (15cm) -
 Wide YL Safety Ramps on 3 Sides

Warranty: Lifetime



ITEM NUMBER	SIZE	THICKNESS	COLOR
556.78x42x48CHYL	42" x 48" (107cm x 122cm)	7/8" (22mm)	CHYL
556.78x42x66CHYL	42" x 66" (107cm x 1.7m)	7/8" (22mm)	CHYL
556.78x42x84CHYL	42" x 84" (107cm x 2.1m)	7/8" (22mm)	CHYL

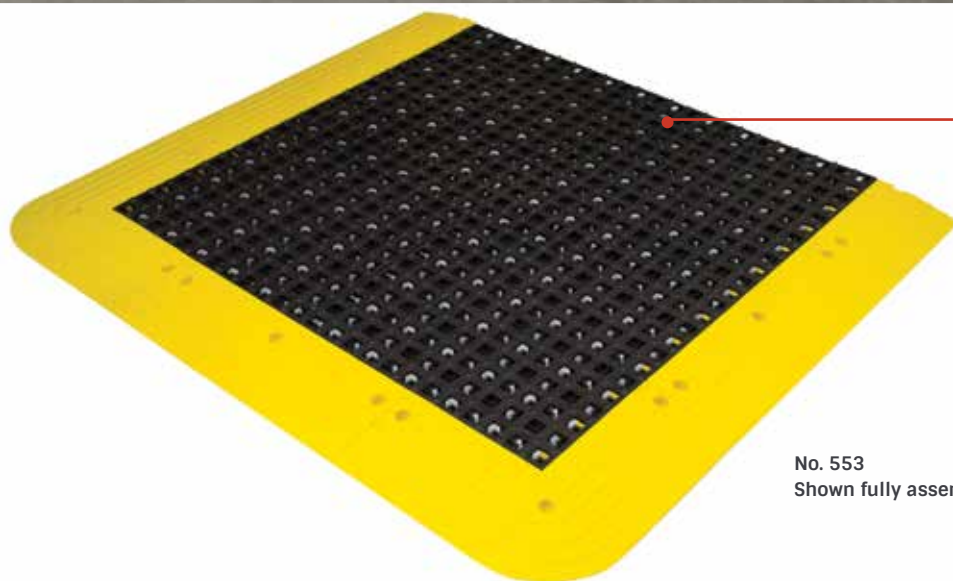

No. 553
 Shown fully assembled

NEED A LARGER SIZE?

Check out pages 16-20 for a highly customizable solution for any size area!

F.I.T.™ KITS

Each F.I.T.™ Kit contains everything you need to create a complete workstation mat. Assemble the kit in minutes without any cutting or gluing — no tools required!

US REG. NO. 3,739,710



544/545

F.I.T.™ Kit



A F.I.T.™ Kit is a remarkably simple and versatile matting solution for nearly any environment. Each kit contains everything you need to create an ergonomic workstation. No tools or cutting required! Snap it together in five minutes and use it for years.



ITEM NUMBER	SIZE	THICKNESS	COLOR
544.58x27x30BYL	27" x 30" (69cm x 76cm)	5/8" (16mm)	BYL
544.58x27x42BYL	27" x 42" (69cm x 107cm)	5/8" (16mm)	BYL
544.58x27x54BYL	27" x 54" (69cm x 137cm)	5/8" (16mm)	BYL
544.58x27x66BYL	27" x 66" (69cm x 1.7m)	5/8" (16mm)	BYL
544.58x27x90BYL	27" x 90" (69cm x 2.3m)	5/8" (16mm)	BYL
544.58x39x66BYL	39" x 66" (99cm x 1.7m)	5/8" (16mm)	BYL
545.58x27x30BYL *	27" x 30" (69cm x 76cm)	5/8" (16mm)	BYL
545.58x27x42BYL *	27" x 42" (69cm x 107cm)	5/8" (16mm)	BYL
545.58x27x54BYL *	27" x 54" (69cm x 1.4m)	5/8" (16mm)	BYL
545.58x27x66BYL *	27" x 66" (69cm x 1.7m)	5/8" (16mm)	BYL
545.58x27x90BYL *	27" x 90" (69cm x 2.3m)	5/8" (16mm)	BYL
545.58x39x66BYL *	39" x 66" (99cm x 1.7m)	5/8" (16mm)	BYL

* GRITSHIELD™ option

SPECIFICATIONS


Compound: PVC

Edges: 3" (8cm) -Wide Safety Ramps on 3 Sides

Warranty: 1 Year




w/GS

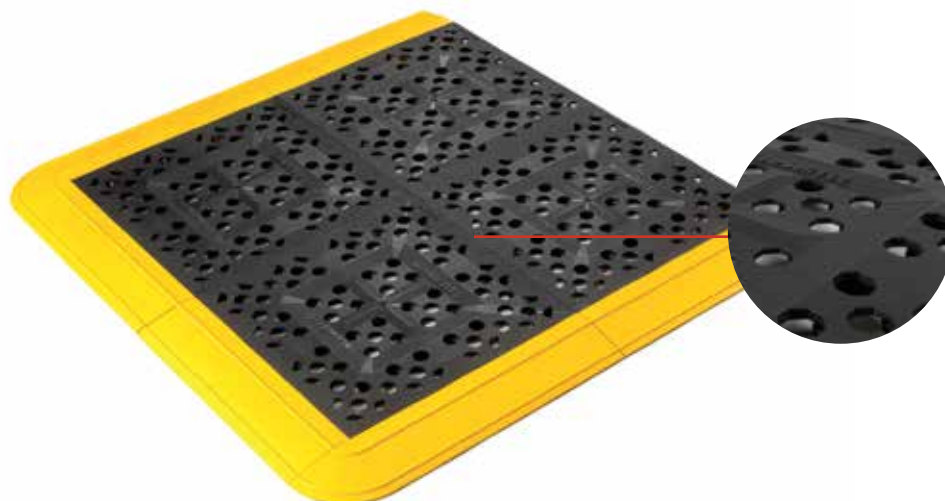

Angled surface design routes fluids through holes for quick drainage!




546 F.I.T.™ Emergency Eyewash Kit

 F.I.T.™ Emergency Eyewash Kit is a remarkably simple, compact, and versatile matting solution that enables you to designate an eyewash station properly. The kit's green tiles and yellow borders ensure high visibility for the station once assembled. Conforms to ANSI Z535.1-1998 Standard



ITEM NUMBER	SIZE	THICKNESS	COLOR
546.58x27x30GNYL	27" x 30" (69cm x 76cm)	5/8" (16mm)	GNYL
546.58x27x42GNYL	27" x 42" (69cm x 107cm)	5/8" (16mm)	GNYL

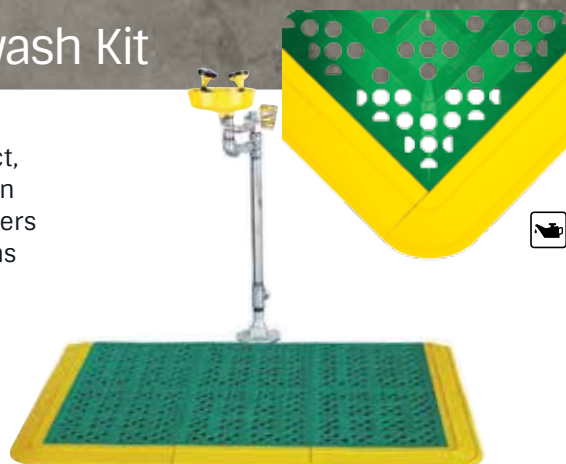


SPECIFICATIONS

Compound: PVC

Edges: 3" (8cm) -Wide Safety Ramps on 3 Sides

Warranty: 1 Year

546 F.I.T.™ Emergency Shower Kit

 F.I.T.™ Emergency Shower Kit is a compact, simple way to make your workplace's emergency shower visible. The kit ships with red F.I.T.™ tiles and yellow borders that, once assembled, will clearly identify the station in case of an emergency. Conforms to ANSI Z535.1-1998 Standard



ITEM NUMBER	SIZE	THICKNESS	COLOR
546.58x27x30RDYL	27" x 30" (69cm x 76cm)	5/8" (16mm)	RDYL
546.58x27x42RDYL	27" x 42" (69cm x 107cm)	5/8" (16mm)	RDYL



SPECIFICATIONS

Compound: PVC

Edges: 3" (8cm)-Wide Safety Ramps on 3 Sides

Warranty: 1 Year

24/SEVEN®

The 24/Seven® modular mat is family of high-performance, interconnecting rubber anti-fatigue mats available in three distinct rubber formulations: GR (Grease Resistant), for areas with water or dry debris; CFR (Cutting-Fluid Resistant), for areas with mineral oil-based fluids; and NBR (Nitrile Rubber), for maximum effectiveness in areas with petroleum-based fluids.



24/SEVEN®

The 24/Seven® mat is the family name for Wearwell high performance, 3' (91cm) x 3' (91cm), interconnecting rubber anti-fatigue mats. These resilient modular mats are 5/8" (16mm) thick and tough enough to handle 24/7 shift operations, while still being supple enough to provide cushioned support where it's needed. Because of its' modularity, mats in this family can be combined and positioned to cover large flooring areas quickly. Or use them for single workstations and assembly lines. 24/Seven® mats are available with a wide variety of options. Three different rubber compounds provide resistance against grease (GR), cutting fluid (CFR), and petroleum-based fluids (NBR). Choose from a solid mat design for drier areas or a perforated variation to maximize drainage in wet workspaces. GRITSHIELD™ material can also be added to increase traction, if needed.



570CFR-576CFR

Cutting-Fluid Resistant



24/Seven® Cutting-Fluid Resistant (CFR) is made of a specially formulated rubber engineered to resist mineral oil. It is also effective against silicone-based brake fluid, boric acid, and ethylene glycol. 24/Seven® mats made with the CFR compound are available in solid and drainage variations, as well as with GRITSHIELD™.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
570CFR 24/Seven® Solid Cutting-Fluid Resistant				
570.58x3x3CFR BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	CFR
*574.58x3x3CFR BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	CFR
572CFR 24/Seven® Open Cutting-Fluid Resistant				
572.58x3x3CFR BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	CFR
*576.58x3x3CFR BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	CFR
24/Seven® Cutting-Fluid Resistant Edging				
572.EdgingFCFR BK	3" x 39" (8cm x 99cm)	5/8" (16mm)	BK, YL	CFR
572.EdgingMCFR BK	3" x 39" (8cm x 99cm)	5/8" (16mm)	BK, YL	CFR

* GRITSHIELD™ option

SPECIFICATIONS

Compound: CFR:
Cutting-Fluid Resistant

Edges: Optional 3" (8cm) - Wide
Male and Female Safety Ramps

Warranty: 1 Year



w/GS

F: Female connector
M: Male connector



570GR/572GR

Grease Resistant



24/Seven® Grease Resistant (GR) is made of high-quality molded rubber. Designed for areas with water and dry debris, it is also resistant to boric acid and ethylene glycol. 24/Seven® mats made with the GR compound are available in solid and drainage variations.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
570GR 24/Seven® Solid Grease Resistant				
570.58x3x3GRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	GR
572GR 24/Seven® Open Grease Resistant				
572.58x3x3GRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	GR
24/Seven® Grease Resistant Edging				
572.EdgingFGRBK	3" x 39" (8cm x 100cm)	5/8" (16mm)	BK, YL	GR
572.EdgingMGRBK	3" x 39" (8cm x 100cm)	5/8" (16mm)	BK, YL	GR

SPECIFICATIONS

Compound: GR:
Grease Resistant

Edges: Optional 3" (8cm) - Wide
Male and Female Safety Ramps

Warranty: 1 Year



F: Female connector
M: Male connector

570NBR-576NBR

Nitrile Rubber



24/Seven® Nitrile Rubber's (NBR) compound is the most resistant in the 24/Seven® family. It stands up to all of the fluids resisted by the GR and CFR formulations, as well as animal fats, brake fluid, chlorine solution, diesel oil, petroleum-based hydraulic oil, salt water, and vegetable oil. 24/Seven® mats made with the NBR compound are available in solid and drainage variations, as well as with GRITSHIELD™.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
570NBR 24/Seven® Solid Nitrile Rubber				
570.58x3x3NBRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	NBR
*574.58x3x3NBRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	NBR
572NBR 24/Seven® Open Nitrile Rubber				
572.58x3x3NBRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	NBR
*576.58x3x3NBRBK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK	NBR
24/Seven® Nitrile Rubber Edging				
572.EdgingFNBRBK	3" x 39" (8cm x 99cm)	5/8" (16mm)	BK, YL	NBR
572.EdgingMNBRBK	3" x 39" (8cm x 99cm)	5/8" (16mm)	BK, YL	NBR

* GRITSHIELD™ option

SPECIFICATIONS

Compound: NBR: Nitrile Rubber

Edges: Optional 3" (8cm) - Wide
Male and Female Safety Ramps

Warranty: 1 Year



F: Female connector
M: Male connector



468

WorkRite II



NEW



WorkRite II has all of the great features of our popular WorkRite rubber mat, lightweight 1/2" (16mm) -thick design, plus a unique molded-in stepped beveled edge for an easier transition. Still perfect for caustic wet and dry areas, and simple to keep clean with its hygienic open design.

ITEM NUMBER	SIZE	THICKNESS	COLOR
468.12x3x10BK	3' x 10' (61cm x 3m)	1/2" (16mm)	BK
468.12x3x20BK	3' x 20' (91cm x 6.1m)	1/2" (16mm)	BK
468.12x3x5BK	3' x 5' (91cm x 152cm)	1/2" (16mm)	BK

SPECIFICATIONS

Compound: GR: Natural Rubber

Edges: Molded-in Safety Bevel

Warranty: 1 Year



SPECIFICATIONS

Compound: GP: 50% Nitrile Rubber or GR: Natural Rubber

Edges: Safety Rounded

Warranty: 1 Year

470

Modular Diamond-Plate

GP GR



Modular Diamond-Plate brings a popular look to the world of rubber mats. Available in both Grease Resistant (GR) and Grease Proof (GP) 3' x 3' (91cm x 91cm) interlocking tiles it is 1/2" (12mm) thick — below the OSHA recommended 5/8" (16mm) threshold for trip hazards — and has rounded edges.

ITEM NUMBER	SIZE	THICKNESS	COLOR
470.12x3x3GPBK	3' x 3' (91cm x 91cm)	1/2" (12mm)	BK
470.12x3x3GRBK	3' x 3' (91cm x 91cm)	1/2" (12mm)	BK

SPECIFICATIONS
Compound: GP: 50% Nitrile Rubber or GR: Natural Rubber
Edges: Safety Rounded
Warranty: 1 Year

476

Industrial WorkSafe®

GR NBR



Industrial WorkSafe® now comes equipped with more options to fit today's demanding workplaces and budgets. Lighter, 5/8" (16mm) thick, and with upgraded rubber formulations, the reworked WorkSafe® features an array of price points and performance options.

ITEM NUMBER	SIZE	THICKNESS	COMPOUND	COLOR
476.58x2x3	2' x 3' (61cm x 91cm)	5/8" (16mm)	GR, NBR*	BYL, BOR, BK
476.58x3x4	3' x 4' (91cm x 122cm)	5/8" (16mm)	GR, NBR*	BYL, BOR, BK
476.58x3x5	3' x 5' (91cm x 152cm)	5/8" (16mm)	GR, NBR*	BYL, BOR, BK
476.58x3x9.8	3' x 9.8' (91cm x 3m)	5/8" (16mm)	GR, NBR*	BYL, BOR, BK

*NBR available in BYL only



NBR GR

SPECIFICATIONS

Compound: GR: Natural Rubber or NBR: Nitrile Rubber

Edges: Molded-in Safety Borders

Warranty: 1 Year


478

WorkSafe® Light



WorkSafe® Light is an invaluable matting solution for cutting-fluid environments where sure footing, quick drainage, and fatigue reduction are essential. Popular for its versatility and dependability, WorkSafe® Light will never let you down, and always lifts you up!

ITEM NUMBER	SIZE	THICKNESS	COLOR
478.12x3x10GY	3' x 10' (91cm x 3m)	1/2" (16mm)	GY
478.12x3x20GY	3' x 20' (91cm x 6m)	1/2" (16mm)	GY
478.12x3x5GY	3' x 5' (91cm x 152cm)	1/2" (16mm)	GY



SPECIFICATIONS

Compound: CFR: Cutting-Fluid Resistant Rubber

Edges: Molded-in Safety Bevel

Warranty: 1 Year


477

WorkSafe® Grease Resistant



WorkSafe® is a veteran All-Pro who remains unfazed. Thick and resilient, tough as all get-out, WorkSafe® is still versatile enough to fit most any workstation. Never underestimate this top seller — the gentle giant among rubber standing mats!

ITEM NUMBER	SIZE	THICKNESS	COLOR
477.78x18x24GRBK	18" x 24" (46cm x 61cm)	7/8" (22mm)	BK
477.78x18x48GRBK	18" x 48" (46cm x 122cm)	7/8" (22mm)	BK
477.78x28x40	28" x 40" (71cm x 102cm)	7/8" (22mm)	BOR, BYL
477.78x2x3GRBK	2' x 3' (61cm x 91cm)	7/8" (22mm)	BK
477.78x3x30GRSBK	3" x 30" (91cm x 76cm)	7/8" (22mm)	BK
477.78x3x4GRBK	3' x 4' (91cm x 122cm)	7/8" (22mm)	BK
477.78x3x5GRSBK	3' x 5' (91cm x 152cm)	7/8" (22mm)	BK
477.78x40x124	40" x 124" (102cm x 3m)	7/8" (22mm)	BOR, BYL
477.78x40x52	40" x 52" (102cm x 132cm)	7/8" (22mm)	BOR, BYL
477.78x40x64	40" x 64" (102cm x 1.7m)	7/8" (22mm)	BOR, BYL
477.EdgingOR	2" x up to 65' (5cm x up to 20m)	1/2" (12mm)	OR
477.EdgingRollOR	2" x 65' (5cm x 20m)	3/8" (9.5mm)	OR
477.EdgingRollYL	2" x 65' (5cm x 20m)	3/8" (9.5mm)	YL
477.EdgingYL	2" x up to 65' (5cm x up to 20m)	3/8" (9.5mm)	YL
Connector.WSH.BK	—	—	—



SPECIFICATIONS


Compound: GR: Natural Rubber

Edges: Optional Attached Safety Edging

Warranty: 1 Year



Connector



BOR

BYL

472

Modular WorkSafe® Light


GP

GR



These innovative 3' x 3' (91cm x 91cm) mats interlock with no additional attachments. At 1/2" (12mm) thick, the mat features rounded outer edges that eliminate the need for beveled ramps and built-in connectors that allow you to easily assemble a larger ergonomic mat that works in wet, dry, or even greasy environments.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
472.12x3x3GPBK	3' x 3' (91cm x 91cm)	1/2" (12mm)	BK	GP
472.12x3x3GRBK	3' x 3' (91cm x 91cm)	1/2" (12mm)	BK	GR



SPECIFICATIONS

Compound: GP: 50% Nitrile Rubber or GR: Natural Rubber

Edges: Safety Rounded

Warranty: 1 Year



GR

GP

454

Ortho Stand™



Ortho Stand™ has a distinctive bubble surface design that provides great performance at an economical price point. Constructed of durable natural rubber, Ortho Stand™ is a solid contender in the battle against fatigue.

ITEM NUMBER	SIZE	THICKNESS	COLOR
454.12x2x3	2' x 3' (61cm x 91cm)	1/2" (12mm)	BK, BYL
454.12x3x4	3' x 4' (91cm x 122cm)	1/2" (12mm)	BK, BYL




SPECIFICATIONS

Compound: GR: Natural Rubber


Edges: Molded-in Safety Bevel

Warranty: 1 Year

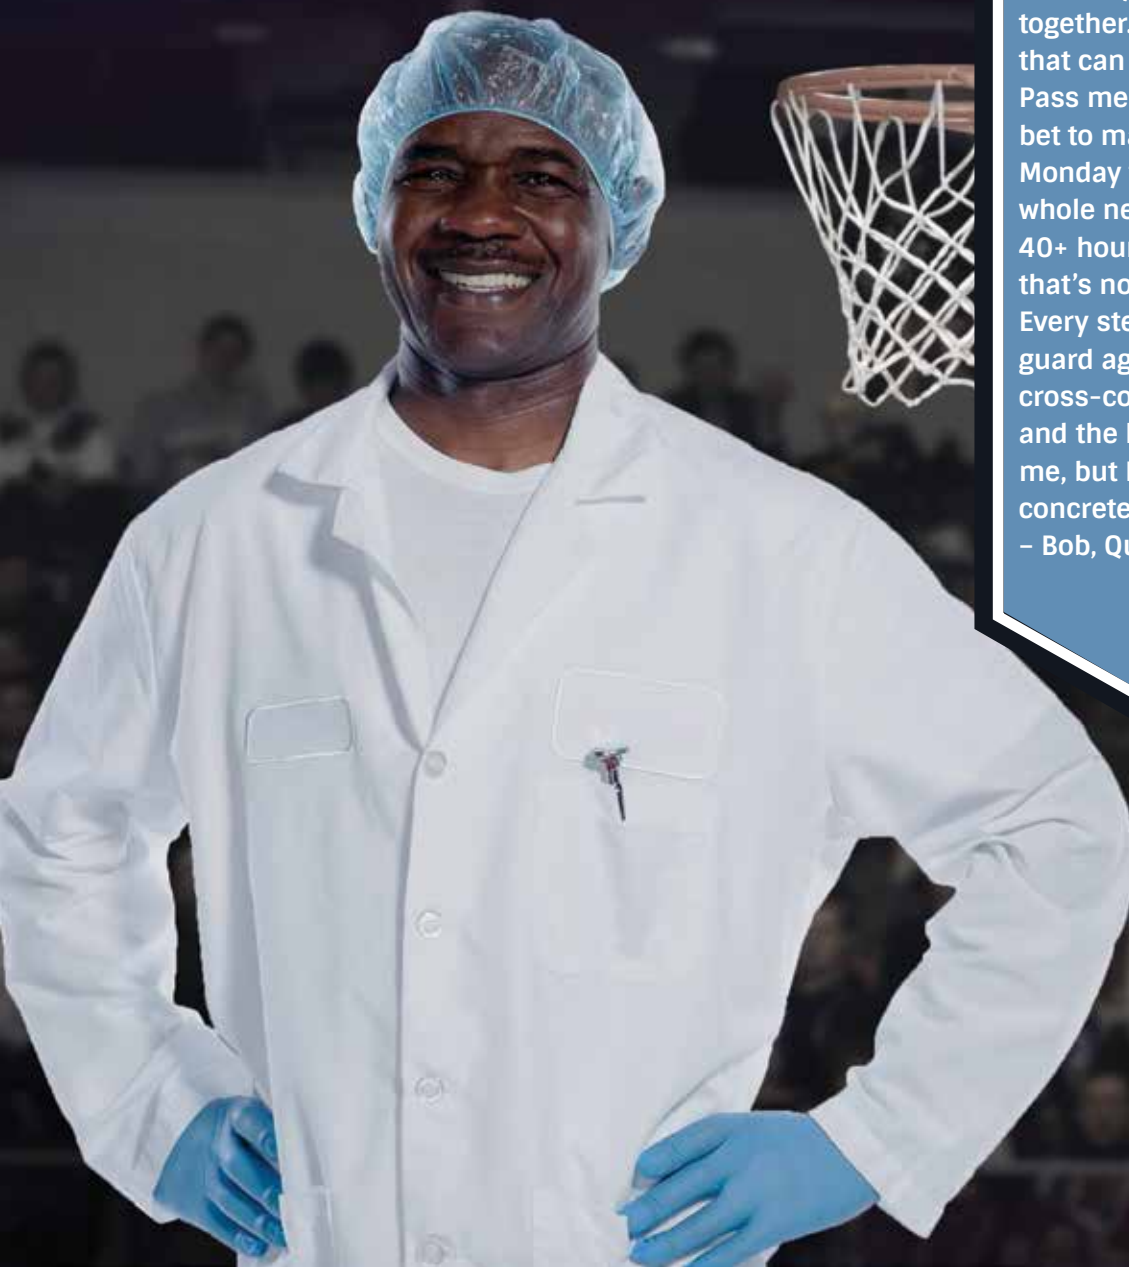

“Basketball is my game. Every Saturday the boys and I get together. There isn’t one of them that can stay with me on the court. Pass me the ball and I’m a solid bet to make the winning shot. But Monday through Friday, it’s a whole new ballgame. I work 40+ hours on a playing field that’s notoriously wet and slick. Every step I take, I have to be on guard against slips, falls, and cross-contamination. My health and the health of millions is up to me, but I simply can’t win on concrete. I lose, we all lose!”
– Bob, Quality Control

An Ounce of Prevention is a slam dunk.

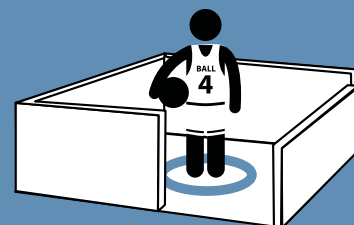

Over
2,600 illnesses

In **2015** from **food contamination**
that occurred during processing*

*Food Safety News Compilation - The 10 Biggest U.S. Food-borne Illness Outbreaks of 2015

474


WorkRite



WorkRite's lightweight 1/2" (13mm) -thick design and molded-in beveled edges set the standard for all other rubber mats. It is economical, suitable for both non-caustic wet and dry areas, and simple to keep clean with its hygienic open design.



ITEM NUMBER	SIZE	THICKNESS	COLOR
474.12x3x10BK	3' x 10' (91cm x 3m)	1/2" (13mm)	BK
474.12x3x20BK	3' x 20' (91cm x 6.1m)	1/2" (13mm)	BK
474.12x3x5BK	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK

**SPECIFICATIONS****Compound:** GR: Natural Rubber**Edges:** Molded-in Safety Bevel**Warranty:** 1 Year


482

Grade "A"®



Grade "A"® mats combat fatigue while addressing issues specific to food production environments. Lightweight with built-in handles, these mats are easy to maintain. The proprietary nitrile compound passes NSF test ASTM G21-96 (2002), has GRAS status, and is CFIA approved. **PATENT US D609,050S**

ITEM NUMBER	SIZE	THICKNESS	COLOR
482.12x30x36TC	30" x 36" (76cm x 91cm)	1/2" (13mm)	TC
482.12x30x60TC	30" x 60" (76cm x 152cm)	1/2" (13mm)	TC



Open underside allows fluids and particles to pass freely

**SPECIFICATIONS****Compound:** GP: Nitrile Rubber**Edges:** Molded Safety Edges**Warranty:** 2 years

222

Sanitizing Footbath Mat



The Sanitizing Footbath Mat decontaminates shoes and boots, which can spread harmful germs and bacteria in food-production facilities. Fill the mat's 1/2" (16mm) - or 2 1/2" (6cm) -deep well with disinfectant solution and then step in to clean footwear.

ITEM NUMBER	SIZE	THICKNESS	COLOR
222.12x24x32BK	24" x 32" (61cm x 81cm)	1/2" (13mm)	BK
222.2.5x32x39BK	32" x 39" (81cm x 99cm)	2 1/2" (6cm)	BK
222.2.5x32x39BYL	32" x 39" (81cm x 99cm)	2 1/2" (6cm)	BYL

**SPECIFICATIONS****Compound:** GR: Natural Rubber**Edges:** Molded Containment Walls**Warranty:** 1 Year


223

Sole-Solution Foot Bath Mat



Optimal solution for facilities where contamination or grease build-up prevention is a necessity. With deep 2.5" (6cm) walls and 5-gallon (18.9 liter) capacity, the Sole-Solution foot bath is an affordable, effective solution that helps improve safety and fight cross-contamination. Resists bacteria growth and swipe pattern provides traction while eliminating collection points for debris.

ITEM NUMBER	SIZE	THICKNESS	COLOR
223.2.5x31x38BK	31" x 38" (79cm x 97cm)	2 1/2" (6cm)	BK
223.2.5x31x38BL	31" x 38" (79cm x 97cm)	2 1/2" (6cm)	BL
223.2.5x31x38YL	31" x 38" (79cm x 97cm)	2 1/2" (6cm)	BYL

**SPECIFICATIONS**

Compound: HDPE
(High-density polyethylene)

Edges: Molded Containment Walls**Warranty:** 1 Year



“When I was on the tennis team, I really had to be on the ball. Reaching, spinning and lunging required an unbelievable amount of stamina on even the best of courts. I’ve long since traded my ball & racquet for parts & boxes, but the pressures and demands on my body sure hasn’t changed. How can I serve my customer on time, every time, working on hard concrete floors? Shin splints and body aches shouldn’t be part of the game!”
– Tracy, Fulfillment Associated

Serving The Customer


More than ever before, customers demand delivery that’s accurate and fast. The number of distribution focused companies trying to meet those needs is growing. Get an edge on the competition by installing the right ergonomic surface to maximize the productivity and stamina of your industrial athletes.”

\$360,000

in average annual savings related to anti-fatigue mats for a company with 175 standing workers.*

* Source: Wearwell independent study
see infographic on page 9 for more information

Fulfillment & Shipping

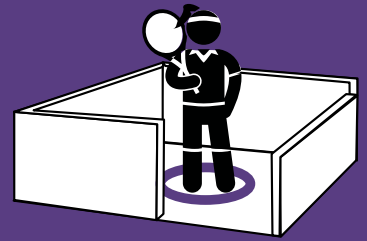

ANTI-FATIGUE RUNNERS

There are various styles available, but conventional blown PVC sponge has the same open-cell structure throughout. While sponge products offer the lowest purchase price, they have the least amount of wear protection and tear strength. For improved wear, choose sponges with added compounds.

These products are a safe call if:

- The area is dry with light to heavy foot traffic
- You need an easily customizable solution to heel strike
- Work flow requires long lengths of continuous anti-fatigue surface


502/503

Runner



Rejuvenator® Runners give you the option to create 2' (61cm)- and 3' (91cm) -wide runs of ergonomic matting. With a female end and a male end, all that's left is to connect as many centers as you need for your space. The molded-in ramps reduce installation time and costs.

ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK

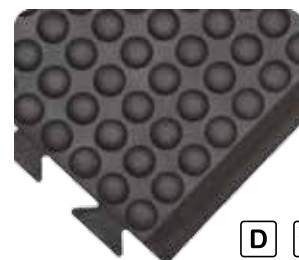

C: Center
EF: End, Female
EM: End, Male



SPECIFICATIONS

Compound: Polyurethane
Edges: Molded-in Safety Bevel
Warranty: Lifetime

Need a longer runner?

Simply add more center mats for unlimited length!

End Mat w/Male
Connectors (EMBK)

Center Mat (CBK)

End Mat w/Female
Connectors (EFBK)

"Wearwell was able to make a huge mat in a very unusual configuration for our parts assembly department. We didn't even know that could be done. Because our employees had to move around a lot, they were always tripping over the small mats we used to have. When we mentioned that to Wearwell, they immediately offered us a custom solution. We're so glad we went with Wearwell."

— A fulfillment facility that brings to mind a rain-forest

414/415

Diamond-Plate SpongeCote®



The Original Diamond-Plate is available in extraordinarily long lengths and delivers performance that outlasts all others. See page 26 or visit our website for more information on our full line of Diamond-Plate products.



SIZE	ITEM NUMBERS	THICKNESS	COLOR
414 Nitricell® Diamond-Plate SpongeCote®			
2' x 75' (61cm x 23m)	414.1516x2x75	15/16" (24mm)	BK, BYL, CHV, GY
3' x 10' (91cm x 3m)	414.1516x3x10	15/16" (24mm)	BK, BYL, CHV, GY
3' x 20' (91cm x 6.1m)	414.1516x3x20	15/16" (24mm)	BK, BYL, CHV, GY
3 x 75' (91cm x 23m)	414.1516x3x75	15/16" (24mm)	BK, BYL, CHV, GY
4' x 75' (122cm x 23m)	414.1516x4x75	15/16" (24mm)	BK, BYL, CHV, GY
5' x 75' (152cm x 23m)	414.1516x5x75	15/16" (24mm)	BK, BYL
6' x 75' (1.9m x 23m)	414.1516x6x75	15/16" (24mm)	BK, BYL
415 Nitricell® Diamond-Plate SpongeCote®			
2' x 75' (61cm x 23m)	415.916x2x75	9/16" (14mm)	BK, BYL, CHV, GY
3' x 10' (91cm x 3m)	415.916x3x10	9/16" (14mm)	BK, BYL, CHV, GY
3' x 20' (91cm x 6.1m)	415.916x3x20	9/16" (14mm)	BK, BYL, CHV, GY
3' x 75' (91cm x 23m)	415.916x3x75	9/16" (14mm)	BK, BYL, CHV, GY
4' x 75' (122cm x 23m)	415.916x4x75	9/16" (14mm)	BK, BYL, CHV, GY
5' x 75' (152cm x 23m)	415.916x5x75	9/16" (14mm)	BK, BYL
6' x 75' (1.9m x 23m)	415.916x6x75	9/16" (14mm)	BK, BYL



300

Starting Line

NEW



Durable polyolefin material joined with a specialized process makes Starting Line resistant to wear and tear. Fatigue-fighting domes are nestable for custom widths and compress underfoot, but bounce back time and time again. Incredibly light weight and flexible, even long lengths can be easily rolled up and rolled away for maintenance and handling.

PART NUMBER	UOM	SIZE
300.38x2x75BK	Roll	2' x 75' (.61m x 23m)
300.38x3x75BK	Roll	3' x 75' (.9m x 23m)
300.38x4x75BK	Roll	4' x 75' (1.2m x 23m)

SPECIFICATIONS

Compound: TPO
Edges: Nestable, Trimmable
Warranty: 1 Year



Are productivity, safety and performance constant hurdles?

Tired of products that fall flat and don't last?

Make the changeover from sponge matting to Starting Line. Starting Line is the first and only product of its kind!

Finally, a product that's comparably priced and fights fatigue in even high foot traffic and wet conditions!

How?

Starting Line is manufactured with a unique process using an incredibly durable material and fatigue-fighting resilient domes that bounce back time and time again!

Water meet your match! Whether it's a wet area or needs hosing down for cleaning, Starting Line can take it! And at 1/3 the weight of sponge, it's never been easier to roll up and carry away!

- Trim & Nest Sections Together For Custom Lengths & Widths
- Resists Tears
- Maintain Easily
- 3/8" (10mm) thick
- 95% Post Industrial Recycled Content



To Learn More About Starting Line Scan The Code — Watch The Video

440

Ultra-Tred ArmorCote



Ultra-Tred ArmorCote has a durable urethane outer skin so that it can continue to work where other entry-level PVC blown-sponge mats fail. With a thickness of 3/8" (10mm), it is especially suited for applications where abrasion is a concern.

ITEM NUMBER	SIZE	THICKNESS	COLOR
440.38x2x3BYL	2' x 3' (61cm x 91cm)	3/8" (10mm)	BYL
440.38x2x60BYL	2' x 60' (61cm x 18m)	3/8" (10mm)	BYL
440.38x3x12BYL	3' x 12' (61cm x 3.7m)	3/8" (10mm)	BYL
440.38x3x5BYL	3' x 5' (91cm x 152cm)	3/8" (10mm)	BYL
440.38x3x60BYL	3' x 60' (91cm x 18m)	3/8" (10mm)	BYL
440.38x4x60BYL	4' x 60' (122cm x 18m)	3/8" (10mm)	BYL



SPECIFICATIONS

Compound: Blown PVC sponge w/urethane coating
Edges: Safety Rounded
Warranty: 1 Year



Available in cuts up to 60' (18m)

451

Tuf Sponge



Tuf Sponge provides an economical PVC blown-sponge barrier for hard floors. With an attractive ribbed surface, this mat can be purchased in rolls and easily cut to length on site for quick replacement when damaged.

ITEM NUMBER	SIZE	THICKNESS	COLOR
451.38x27x36	27' x 36' (68cm x 91cm)	3/8" (10mm)	BK, BYL, GY
451.38x27x60	27' x 60' (68cm x 18m)	3/8" (10mm)	BK, BYL, GY
451.38x2x3	2' x 3' (61cm x 91cm)	3/8" (10mm)	BK, BYL, GY
451.38x2x60	2' x 60' (61cm x 18m)	3/8" (10mm)	BK, BYL, GY
451.38x3x12	3' x 12' (91cm x 3.7m)	3/8" (10mm)	BK, BYL, GY
451.38x3x5	3' x 5' (91cm x 152cm)	3/8" (10mm)	BK, BYL, GY
451.38x3x60	3' x 60' (91cm X 18m)	3/8" (10mm)	BK, BYL, GY
451.38x4x60	4' x 60' (122cm X 18m)	3/8" (10mm)	BK, BYL, GY
451.38x6x60BK	6' x 60' (1.9m x 18m)	3/8" (10mm)	BK

Available in cuts up to 60' (18m)



SPECIFICATIONS

Compound: Blown PVC Sponge

Edges: Safety Rounded

Warranty: 1 Year



442

Deluxe Tuf Sponge



Deluxe Tuf Sponge comes with all the standard benefits of Tuf Sponge and is backed with 5/8"(16mm)-thick PVC sponge. It can also be purchased in rolls and easily cut to length on-site for quick replacement when damaged.

ITEM NUMBER	SIZE	THICKNESS	COLOR
442.58x2x3	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK, BYL, GY
442.58x2x60	2' x 60' (61cm x 18m)	5/8" (16mm)	BK, BYL, GY
442.58x3x5	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK, BYL, GY
442.58x3x60	3' x 60' (91cm x 18m)	5/8" (16mm)	BK, BYL, GY
442.58x4x60	4' x 60' (122cm x 18m)	5/8" (16mm)	BK, BYL, GY

Available in cuts up to 60' (18m)



SPECIFICATIONS

Compound: Blown PVC Sponge

Edges: Safety Rounded

Warranty: 1 Year



452

Diamond Tuf Sponge



Like the other Tuf Sponge models, Diamond Tuf Sponge provides an economical PVC blown sponge barrier for hard floors. With a popular Diamond-Plate surface pattern, Diamond Tuf Sponge also provides additional abrasion and chemical resistance.

ITEM NUMBER	SIZE	THICKNESS	COLOR
452.12x2x3	2' x 3' (61cm x 91cm)	1/2" (13mm)	BK, BYL
452.12x2x60	2' x 60' (61cm x 18m)	1/2" (13mm)	BK, BYL
452.12x3x5	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK, BYL
452.12x3x60	3' x 60' (91cm x 18m)	1/2" (13mm)	BK, BYL
452.12x4x60	4' x 60' (122cm x 18m)	1/2" (13mm)	BK, BYL

Available in cuts up to 60' (18m)



SPECIFICATIONS

Compound: Blown PVC Sponge

Edges: Safety Rounded

Warranty: 1 Year



459

Endurable



With an overall thickness of 1/2" (13mm), Endurable outlasts other blown-sponge products thanks to its "dual layer" construction. The mat's dense PVC surface top layer withstands abrasion and foot traffic while the softer under-layer provides ergonomic relief.

ITEM NUMBER	SIZE	THICKNESS	COLOR
459.12x2x3BK	2' x 3' (61cm x 91cm)	1/2" (13mm)	BK
459.12x2x60BK	2' x 60' (61cm x 18m)	1/2" (13mm)	BK
459.12x3x12BK	3' x 12' (91cm x 366)	1/2" (13mm)	BK
459.12x3x5BK	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK
459.12x3x60BK	3' x 60' (91cm x 18m)	1/2" (13mm)	BK
459.12x4x60BK	4' x 60' (122cm x 18m)	1/2" (13mm)	BK

Available in cuts up to 60' (18m)



SPECIFICATIONS

Compound: Blown PVC Sponge w/Vinyl Coating

Edges: Stock Sizes: Safety Rounded;
Cut Lengths: Beveled

Warranty: 1 Year



427

Soft Step



Soft Step is an economical PVC blown-sponge barrier for hard floors that reduces worker fatigue and the impact of heel strike. It can be purchased in rolls and easily cut to length on site for quick replacement when damaged.

ITEM NUMBER	SIZE	THICKNESS	COLOR
427.38x2x3	2' x 3' (61cm x 91cm)	3/8" (10mm)	BK, BYL, GY
427.38x2x60	2' x 60' (61cm x 18m)	3/8" (10mm)	BK, BYL, GY
427.38x3x12	3' x 12' (91cm x 3.7m)	3/8" (10mm)	BK, BYL, GY
427.38x3x5	3' x 5' (91cm x 152cm)	3/8" (10mm)	BK, BYL, GY
427.38x3x60	3' x 60' (91cm x 18m)	3/8" (10mm)	BK, BYL, GY
427.38x4x60	4' x 60' (122cm x 18m)	3/8" (10mm)	BK, BYL, GY

Available in cuts up to 60' (18m)



SPECIFICATIONS

Compound: Blown PVC Sponge

Edges: Safety Rounded

Warranty: 1 Year



444

Deluxe Soft Step



Deluxe Soft Step is backed by 5/8" (16mm) of PVC blown sponge. Like Soft Step, it features an attractive pebbled surface and can be purchased in rolls and easily cut to length on site for quick replacement when damaged.

ITEM NUMBER	SIZE	THICKNESS	COLOR
444.58x2x3	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK, BYL, GY
444.58x2x60	2' x 60' (61cm x 18m)	5/8" (16mm)	BK, BYL, GY
444.58x3x5	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK, BYL, GY
444.58x3x60	3' x 60' (91cm x 18m)	5/8" (16mm)	BK, BYL, GY
444.58x4x60	4' x 60' (122cm x 18m)	5/8" (16mm)	BK, BYL, GY

Available in cuts up to 60' (18m)




SPECIFICATIONS

Compound: Blown PVC Sponge

Edges: Safety Rounded

Warranty: 1 Year



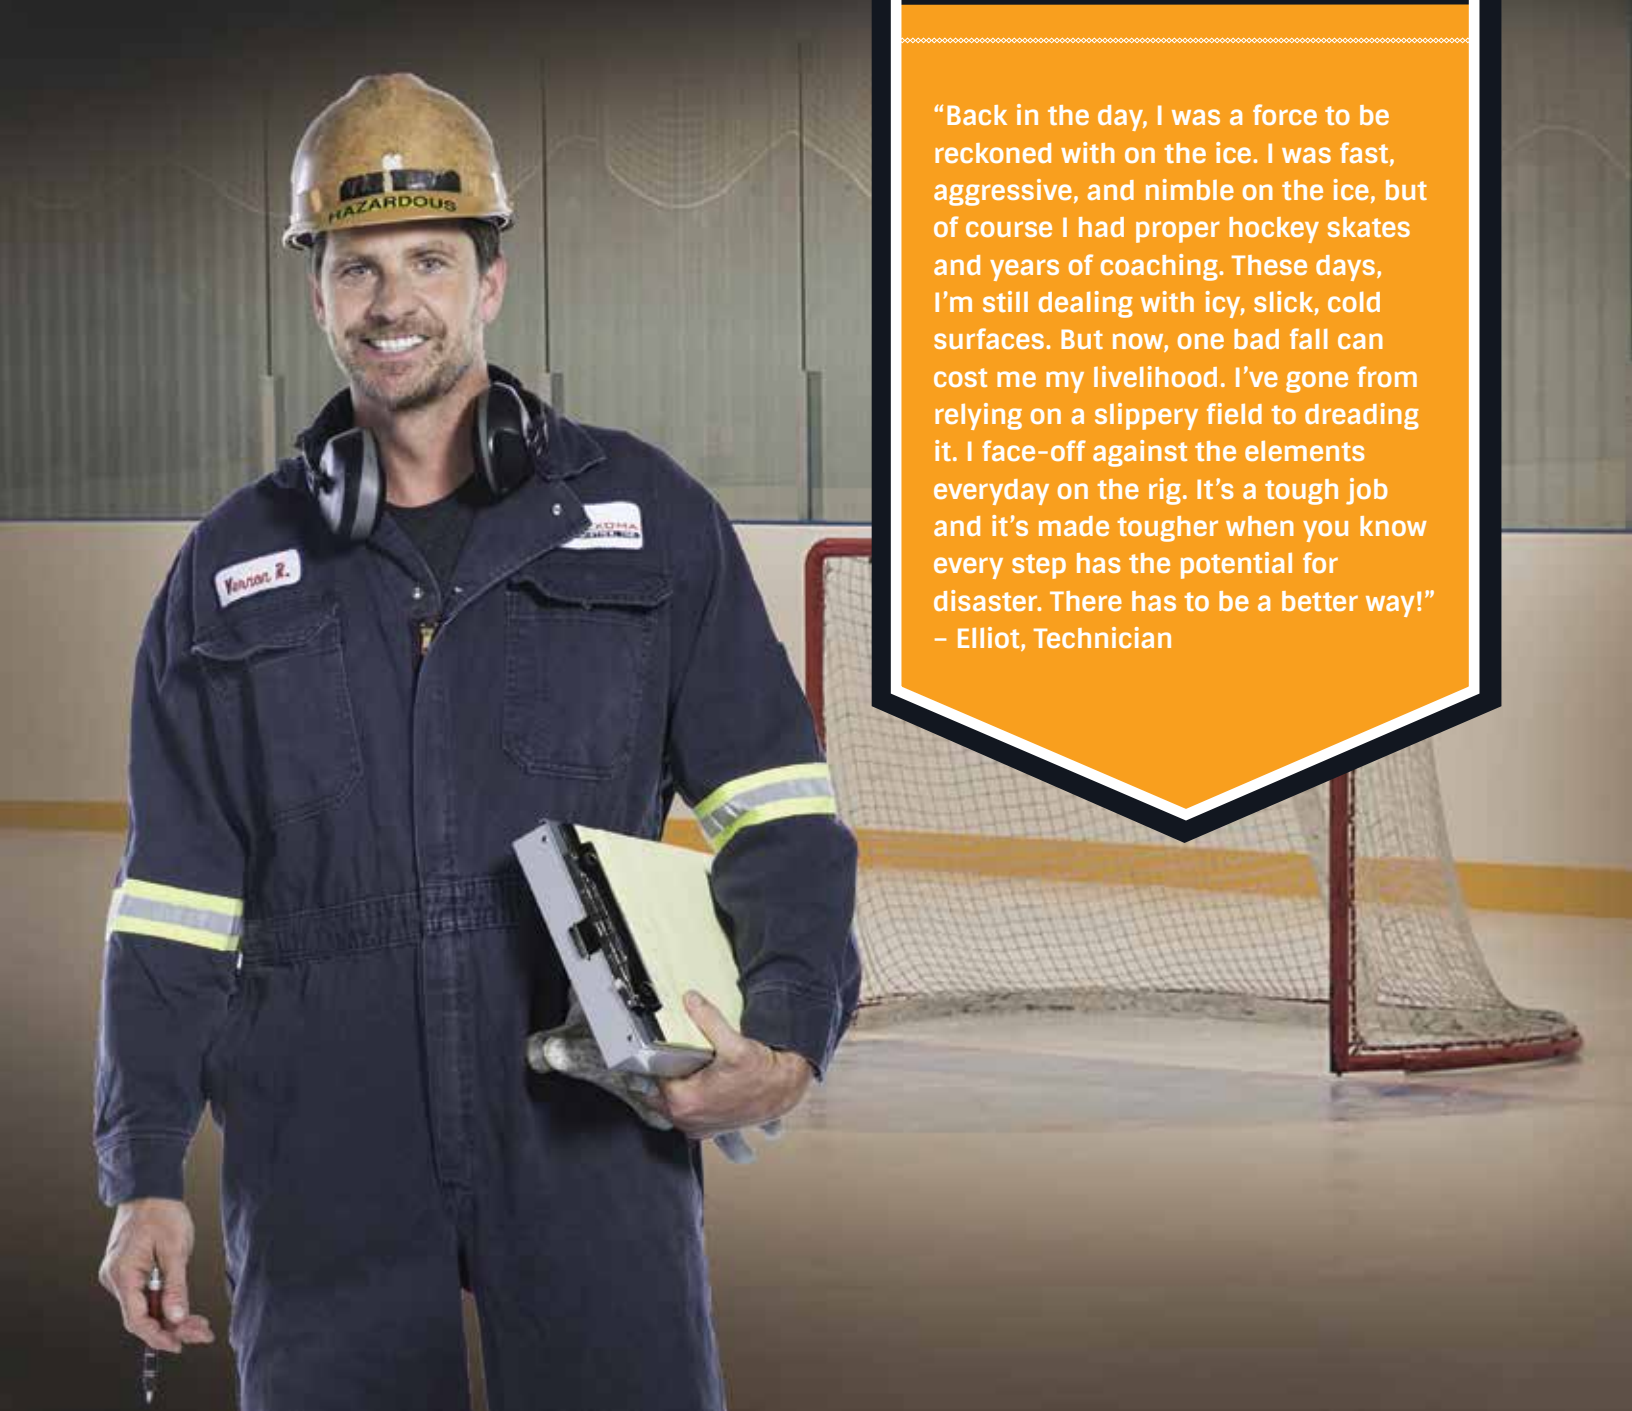

“Back in the day, I was a force to be reckoned with on the ice. I was fast, aggressive, and nimble on the ice, but of course I had proper hockey skates and years of coaching. These days, I’m still dealing with icy, slick, cold surfaces. But now, one bad fall can cost me my livelihood. I’ve gone from relying on a slippery field to dreading it. I face-off against the elements everyday on the rig. It’s a tough job and it’s made tougher when you know every step has the potential for disaster. There has to be a better way!”
– Elliot, Technician

There's No Room For A Penalty


High Risk areas are prone to injuries and in some cases fatalities. The cost are too high for sub-standard products.

311 DEATHS

due to electrical current in just one year in the United States.*

* Source: National Safety Council Injury Facts 2014 Edition

High Risk

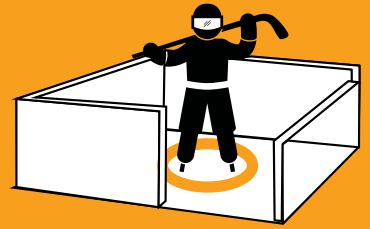

HIGH RISK

Unlike ESD or conductive matting designed to protect objects, switchboard (also known as non-conductive) products protect personnel from potentially fatal shock. Recognize the need for non-conductive matting if:

- Team members are exposed to high-voltage electricity
- The work area has high-voltage signs that indicate electrical danger
- The goal, first and foremost, is to ensure the safety of personnel

STANDARDS 101

Industry Standard: ANSI/ASTM D178-01

Type I: made using any properly vulcanized elastomer

Type II: made using any properly vulcanized elastomer AND has additional properties such as Ozone Resistance, Flame Resistance, and Oil Resistance

Class 2 and 3 defines the dielectric strength: the higher the class, the greater the dielectric strength.

Navy/Defense Dept. Standard: MIL. SPEC. 15562-G

Type I: Sheet, smooth surface

Type II: Mat, runner type, smooth surface

Type III: Mat, runner type, raised diamond-pattern surface

701

Conforms to ANSI/ASTM D178-01,
Type II, Class 2 standards

702

- 1/4" thickness conforms to ANSI/ASTM D178-01, Type II, Class 2
- 3/8" thickness conforms to ANSI/ASTM D178-01, Type II, Class 3

710

Conforms to Mil. Spec. 15562-G, Type I

711

Conforms to Mil. Spec. 15562-G Amend 3, Type II

712

Conforms to Mil. Spec. 15562-G Amend 3, Type III

720

Conforms to ANSI/ASTM D178-01, Type II, Class 2

NOT SURE WHAT YOU NEED?

WE'RE UP FOR THE CHALLENGE!

CUTTING EDGE SITE-SURVEY PROCESS

Even the best teams are faced with challenges. You don't have to go it alone. Tackle them with one of our global team of experts. Using state of the art tools, they'll assess your matting condition, and create a game plan specific to your goals, initiatives and budget.

Contact us and take advantage of this valuable service today and experience how Wearwell can help you achieve your goals.



OVER 70 FIELD EXPERTS ACROSS U.S., CANADA, MEXICO AND SOUTH AMERICA!

720 Double Duty Switchboard Corrugated Mat



Switchboard matting has a singular purpose: to protect personnel from life-threatening electrical shocks. Often referred to as "insulated" or "non-conductive" matting, these products insulate workers from up to high voltages of 30,000 volts.

While insulating standing workers from high-voltage shock, Double Duty Switchboard also provides standing relief. The premium Nitricell® sponge base is ideal for workers who stand for extended periods of time — such as those who work in many military, mining and industrial facilities.

ITEM NUMBER	SIZE	THICKNESS	COLOR
720.58x3x5	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK, BYL
720.58x3x75	3' x 75' (91cm x 23m)	5/8" (16mm)	BK, BYL

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: Non-Conductive Vinyl over Nitricell® Sponge

Edges: Lay-Flat Bevel

Warranty: 1 Year



701 Diamond-Plate Switchboard Matting



Featuring a tough but attractive diamond-plate surface design, Diamond-Plate Switchboard Matting is an essential safety product for mining, munitions, utility, and other heavy-industry facilities — any industrial space where potentially lethal shocks can be encountered, it has a recommended max voltage of 17,000 volts.

ITEM NUMBER	SIZE	THICKNESS	COLOR
701.14x2x75	2' x 75' (61cm x 23m)	1/4" (6mm)	BK
701.14x3x75	3' x 75' (91cm x 23m)	1/4" (6mm)	BK
701.14x4x75	4' x 75' (122cm x 23m)	1/4" (6mm)	BK

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: Non-Conductive Vinyl

Edges: Square

Warranty: 1 year



702 Corrugated Switchboard Matting



Corrugated Switchboard Matting is an essential safety product for a wide range of industries such as mining, munitions, utilities, and heavy industry — anywhere the danger of lethal shock is prevalent. Features a tough corrugated surface for extra traction. 1/4" (6mm) has a recommended max voltage of 17,000 volts and 3/8" (10mm) up to 26,000 volts.

ITEM NUMBER	SIZE	THICKNESS	COLOR
702.14x2x75	2' x 75' (61cm x 23m)	1/4" (6mm)	BK
702.14x3x75	3' x 75' (91cm x 23m)	1/4" (6mm)	BK, BYL
702.14x4x75	4' x 75' (122cm x 23m)	1/4" (6mm)	BK
702.38x3x75*	3' x 75' (91cm x 23m)	3/8" (10mm)	BK

*Roll Only

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: Non-Conductive Vinyl

Edges: Square

Warranty: 1 Year



710

Marbleized Military Switchboard Matting



Specially engineered for military applications, Marbleized Military Switchboard Matting meets Mil. Spec. 15562-G, Type I. Max. 7,500 volts. Designed for permanent flooring installation, this non-conductive mat has Dielectric Strength up to 30,000 volts and can be secured in place by using any vinyl-mastic adhesive. For installations of multiple mats that require seaming, Wearwell offers compatible welding thread. When installing several widths of Marbleized Military Switchboard Matting side-by-side, it is important to seal the seams to ensure reliable and consistent insulation. For best results, professional floor installers are recommended.

ITEM NUMBER	ITEM	SIZE	THICKNESS	COLOR
710.18x3x75M	Matting	3' x 75' (91cm x 23m)	1/8" (3mm)	BL, GN
710.18x50	Thread	50' (15m)	1/8" (3mm)	BL, GN
710.18x150	Thread	150' (46m)	1/8" (3mm)	BL, GN
710.THREADROLL	Thread	300' (91m)	1/8" (3mm)	BL, GN

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: Non-Conductive Vinyl

Edges: Square

Warranty: 1 Year



Thread

711

Smooth Military Switchboard Matting



Designed to meet strict Mil. Spec 15562-F Amend. 3, Type II military standards, Smooth Military Switchboard Matting has a dielectric strength of 30,000 volts and a recommended usage up to 3,000 volts. Also passes federal flammability standard 501.

ITEM NUMBER	SIZE	THICKNESS	COLOR
711.18x3x75BK	3' x 75' (91cm x 23m)	1/8" (3mm)	BK

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: Non-Conductive PVC

Edges: Square

Warranty: 1 Year



712

Diamond-Plate Military Switchboard



Diamond-Plate Military Switchboard meets Mil. Spec 15562-F Amend. 3, Type III military standards. It has dielectric strength of up to 30,000 volts, and is perfect for use around high-voltage apparatuses and in heavily trafficked areas, the Diamond-Plate pattern offers additional traction and abrasion resistance.

ITEM NUMBER	SIZE	THICKNESS	COLOR
712.316x3x75GY	3' x 75' (91cm x 23m)	3/16" (5mm)	GY

Available in cuts up to 75' (23m)



SPECIFICATIONS


Compound: Non-Conductive PVC

Edges: Square

Warranty: 1 Year



ESD

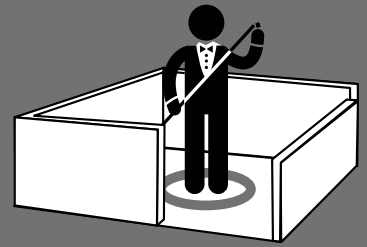

Wearwell offers both conductive and static-dissipative mats designed to eliminate static shock. These quality products promote improved team performance and assure product quality.

Your field needs ESD defense if:

- Products being handled or produced in it are sensitive to static shock
- The air in the workspace has high levels of combustible fumes or particulates
- Your team is annoyed at the frequency of static shock

ESD 101

ElectroStatic Discharge (ESD)

Electrical resistance is measured in ohms; the smaller the rating, the more conductive the material.

Think of static resistance in terms of aerodynamics. With a lower sleeker profile air travels at a much smoother and faster rate. The higher the ohm rating it becomes less aerodynamic and flows much slower.

Static Dissipative

(>1x10⁶Ω to 1x10¹⁰Ω)

High Resistance


High ohm rating

Conductive


(1x10³Ω to 1x10⁶Ω)

Low Resistance

Low ohm rating

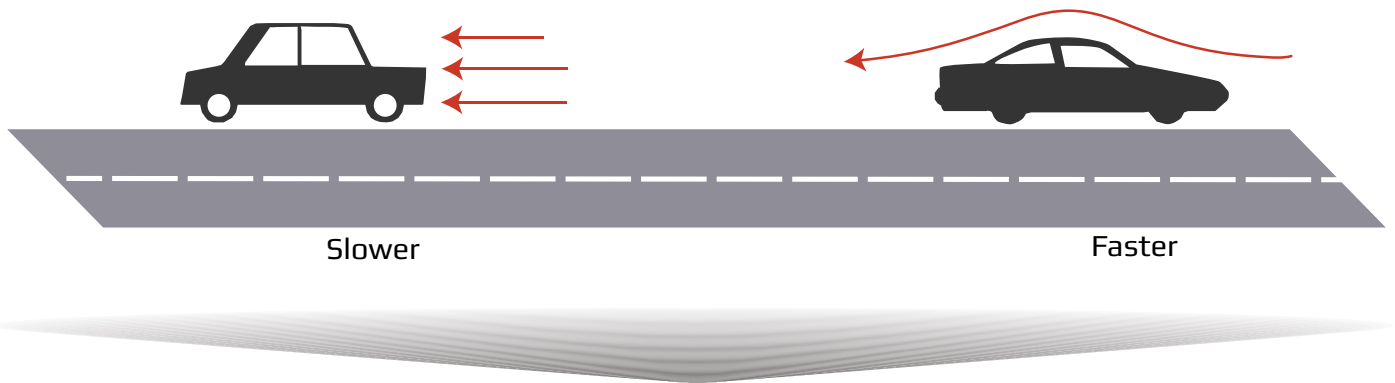

Critical Accessories ESD

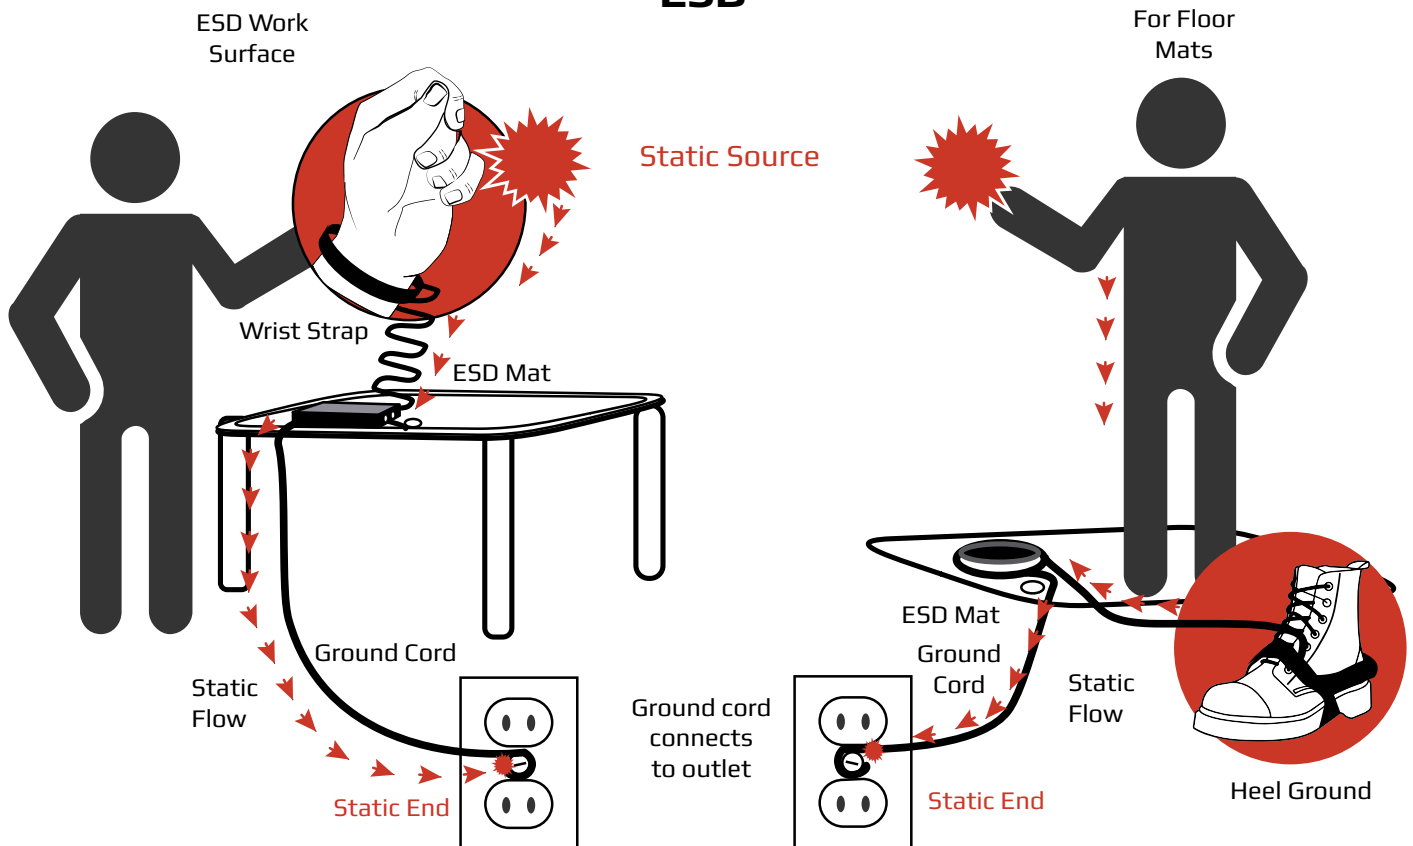

557

ErgoDeck® ESD

NEW



When static electricity builds up, it seeks a path to ground — often through the human body or through sensitive, conductive equipment. The best way to eliminate these risks is to create a static-dissipative environment. ErgoDeck® ESD — a comprehensive flooring solution — offers the best defense. Used over conductive sub-flooring, ErgoDeck® ESD is your best defense against both worker fatigue and static shock that could compromise the quality of your products. Made of a proprietary TPO/carbon blend, ESD properties permeate the entire tile. No snaps or additional grounding is necessary when used over conductive flooring. Positive interlocks stay secure, ensuring areas of any size are protected. When installed wall-to-wall, ramps and corners aren't necessary. For transition areas, use ErgoDeck® standard universal ramps. PATENT US 8,006,443B2 US D5210,650S



SPECIFICATIONS

Compound: TPO

Edges: Optional 6" (15cm) -Wide Safety Ramps

Warranty: 1 Year

EOS/ESD S7.1: 1x10⁶ - 1x10¹⁰

See page 17 for the universal ErgoDeck® ramps and corners.


ITEM NUMBER	SIZE	THICKNESS	COLOR
557.78x18x18BK-CS10	18" x 18" (46cm x 46cm)	7/8" (22mm)	BK

785

Electrically Conductive Runner



Use Electrically Conductive Runner to prevent static and protect sensitive electronic equipment. It can be rolled out for long aisles or cut to size for specific workstations. A grounding snap is included on each mat for optimum mat performance. Available in Smooth or Diamond-Plate surfaces. MAT MUST BE GROUNDED WITH A GROUND CORD; WORKERS MUST WEAR HEEL GROUNDOR OR CONDUCTIVE SHOES.



SPECIFICATIONS

Compound: PVC

Edges: Square

Warranty: 1 Year

EOS/ESD S7.1: 1x10³ - 1x10⁶

ITEM NUMBER	SIZE	THICKNESS	COLOR	SURFACE TEXTURE
785.532x3x75	3' x 75' (91cm x 23m)	5/32" (4mm)	BK	DP
785.332x3x75	3' x 75' (91cm x 23m)	3/32" (2mm)	BK	SM

786

Electrically Conductive Anti-Fatigue



Electrically Conductive Anti-Fatigue protects sensitive electronic equipment while dramatically reducing workers' standing fatigue. Our No. 1 seller for static-control applications, it features our durable, top-of-the-line Nitricell® sponge, providing the best long-term value for ESD applications. Available in Smooth or Diamond-Plate surfaces. MAT MUST BE GROUNDED WITH A GROUND CORD; WORKERS MUST WEAR HEEL GROUNDOR OR CONDUCTIVE SHOES.



SPECIFICATIONS

Compound: PVC/Nitrile-Infused Sponge

Edges: Lay-Flat Bevel

Warranty: 1 Year

EOS/ESD S7.1: 1x10³ - 1x10⁶

ITEM NUMBER	SIZE	THICKNESS	COLOR	SURFACE TEXTURE
786.1516x2x3	2' x 3' (61cm x 91cm)	15/16" (24mm)	BK	SM, DP
786.1516x3x5	3' x 5' (91cm x 152cm)	15/16" (24mm)	BK	SM, DP
786.1516x3x75	3' x 75' (91cm x 23m)	15/16" (24mm)	BK	SM, DP
786.916x2x3	2' x 3' (61cm x 91cm)	9/16" (14mm)	BK	SM, DP
786.916x3x5	3' x 5' (91cm x 152cm)	9/16" (14mm)	BK	SM, DP
786.916x3x75	3' x 75' (91cm x 23m)	9/16" (14mm)	BK	SM, DP

Please specify Smooth or Diamond-Plate when ordering. 4' widths of Diamond-Plate available in cuts up to 75' (23m)

788

Modular Diamond-Plate ESD



Modular Diamond-Plate ESD mats have been designed for areas where static discharge is a major concern. These solid 3' x 3' (91cm x 91cm) mats can either be used individually or joined together — quickly and with no connectors — to cover larger work areas.

MAT MUST BE GROUNDED WITH A GROUND CORD; WORKERS MUST WEAR HEEL GROUNDING OR CONDUCTIVE SHOES.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
788.12x3x3GRBK	3' x 3' (91mm x 91mm)	1/2" (13mm)	BK	GR



SPECIFICATIONS

Compound: GR: Natural Rubber

Edges: Safety Rounded

Warranty: 1 Year

EOS/ESD S7.1:1x10⁶ to 1x10¹⁰



789


Modular WorkSafe® Light ESD



Modular WorkSafe® Light ESD is an ideal matting solution for areas where static discharge is a major concern and where light moisture might also come into play. Modular in nature, these open-design 3' x 3' (91cm x 91cm) mats are versatile enough that they can either be used individually or interlocked to cover larger work areas.

MAT MUST BE GROUNDED WITH A GROUND CORD; WORKERS MUST WEAR HEEL GROUNDING OR CONDUCTIVE SHOES.

ITEM NUMBER	SIZE	THICKNESS	COLOR	COMPOUND
789.12x3x3GRBK	3' x 3' (91mm x 91mm)	1/2" (13mm)	BK	GR



SPECIFICATIONS

Compound: GR: Natural Rubber

Edges: Safety Rounded

Warranty: 1 Year

EOS/ESD S7.1:1x10⁶ to 1x10¹⁰



Static produced from walking can range from

10,000–12,000

VOLTS.

Static shock isn't felt until it's greater than

2,000

VOLTS.

DAMAGE

can be done without knowing an event has occurred.

791

Static Dissipative Anti-Fatigue



Static Dissipative Anti-Fatigue is an ergonomic standing solution for manufacturing, pharmaceutical, and commercial areas where static electricity poses a problem.



The carbon-impregnated polyester scrim embedded in the surface material ensures speedy static dissipation. Comes with a four-year warranty.



MAT MUST BE GROUNDED WITH A GROUND CORD; WORKERS MUST WEAR HEEL GROUNDERS OR CONDUCTIVE SHOES.



SPECIFICATIONS

Compound: PVC/Nitrile-Infused Sponge

Edges: Lay-Flat Bevel

Warranty: 4 Years

EOS/ESD S7.1: 1x10⁶ to 1x10¹⁰



ITEM NUMBER	SIZE	THICKNESS	COLOR
791.12x2x3GY	2' x 3' (61cm x 91cm)	1/2" (13mm)	GY
791.12x3x5GY	3' x 5' (91cm x 152cm)	1/2" (13mm)	GY
791.12x3x75GY	3' x 75' (91cm x 23m)	1/2" (13mm)	GY
791.12x4x75GY	4' x 75' (122cm x 23m)	1/2" (13mm)	GY

793

Heel Grounder



ESD Heel Grounder allows static electricity to pass from workers who equip it to ESD matting or flooring underfoot. A required accessory for ESD matting, Heel Grounder is "one size fits all" with a Velcro loop for easy attachment.



FOR USE WITH ESD AND CONDUCTIVE MATTING.



ITEM NUMBER	SIZE	COLOR
793.HG	One size fits all	BK



SPECIFICATIONS

One Size Fits All



793

Ground Cord



The 15' (4.6m)-long ESD Ground Cord is used to connect ESD tabletop and floor mats to ground. The molded-in fastener has an integral one-mega-ohm resistor, conforms to 10mm snaps, and features a solderless terminal. Can be used with all conductive mats.



FOR USE WITH ESD AND CONDUCTIVE MATTING.



SPECIFICATIONS



ITEM NUMBER	SIZE	COLOR
793.15Cord	15' (4.6m)	BK

793

ESD Work Surface Material



ESD Work Surface Material is designed for work surfaces where static control is imperative. Featuring a flexible three-layer construction, it is ideal for use under computers, as a liner for conductive bins, or for tabletops where components are packaged. Mat must be grounded with a ground cord.

ITEM NUMBER	SIZE	THICKNESS	COLOR
793.18x2x3SB	2' x 3' (61cm x 91cm)	1/8" (3mm)	SB
793.18x2x4SB	2' x 4' (61cm x 122cm)	1/8" (3mm)	SB



SPECIFICATIONS

Compound: Vinyl

Edges: Square Cut

Warranty: 1 Year

EOS/ESD S7.1:1x10⁶ to 1x10¹⁰

793

Wrist Strap



ESD Wrist Strap is a six-foot comfort strap that loops around a worker's wrist and grounds them to their ESD tabletop mat, allowing static electricity to dissipate harmlessly. ESD Wrist Strap features a solderless terminal. Includes alligator clip for easy ground

ITEM NUMBER	SIZE	COLOR
793.6WSTRAP	6' (1.9m)	BK



SPECIFICATIONS

Warranty: 1 Year



797

ESD Common Point Ground Cord



ESD Common Point Ground Cord connects to and grounds two ESD Wrist Straps. ESD Common Point Ground Cord's molded-in male fastener connects to the snap on the tabletop mat while the terminal connects to a building ground.

ITEM NUMBER	SIZE	COLOR
797.CPCORD	15' (4.6m)	BK



SPECIFICATIONS


Warranty: 1 Year



WE INTERRUPT THIS CATALOG WITH SOME GREAT INSTALLATION PHOTOS



See more application solutions at www.Wearwell.com



"Precision, agility, and a good landing were needed for the vault. The same is true during the week. Repairing or maintaining, you could be in any number of environments. Lying on a cold concrete or greasy surface, doesn't do it for me."
– Bill, Maintenance Tech

**Agility, Ingenuity And The Best Tools Are
The Answer To Prevention**

54% DAYS MISSED

**Injuries resulting in days missed from
work related to facility maintenance
and upkeep***

* Source: US Bureau of Labor Statistics – BLS Reports, July 2015

Facility Maintenance



MAINTENANCE

These products provide needed field support if:

- Your team's workspace requires station-to-station standing, kneeling, or even laying down
- Cross-tracking makes carpets and floors difficult to keep clean
- Cross-tracking means cross-contamination

514/515

ROVER™



The ROVER™ mat lets your industrial athletes excel at any position on the field. Whether they require an anti-fatigue surface for standing, a cushion with great rebound for kneeling, or a comfortable head support for when they're on the ground, ROVER™ mats have them covered.

ROVER™ features a unique 1" (25mm) nitrile-enhanced sponge that is non-conductive, petroleum resistant, and silicone free. If you spend time on your back, use the ROVER™ built-in interlock to combine a rolled ROVER™ mat with a horizontal one for both head and upper-back support.

With ROVER™ mats, your team can play at home or away and always be guaranteed a triple play. Take your game to a new level with the most versatile kneel mat on the market!



SPECIFICATIONS

Compound: Nitrile-Infused Sponge

Edges: Square

Warranty: 1 Year

Patent: US D673, 405S



NEW

TRADITIONAL KNEEL MATS

ITEM NUMBER	SIZE	THICKNESS	COLOR
514.1x12x22BK	12" x 22" (31cm x 56cm)	1" (25mm)	BK
514.1x12x22BK-CS5	12" x 22" (31cm x 56cm)	1" (25mm)	BK
514.1x14x21BK	14" x 21" (36cm x 53cm)	1" (25mm)	BK
514.1x12x22BK-CS5	14" x 21" (36cm x 53cm)	1" (25mm)	BK
514.1x8x16BK	8" x 16" (20cm x 41cm)	1" (25mm)	BK
514.1x8x16BK-CS5	8" x 16" (20cm x 41cm)	1" (25mm)	BK

3 IN 1- KNEEL MATS

ITEM NUMBER	SIZE	THICKNESS	COLOR
515.34x14x21BK	14" x 21" (36cm x 53cm)	1" (25mm)	BK
515.34x14x21BK-CS5	14" x 21" (36cm x 53cm)	1" (25mm)	BK



Learn More
About ROVER®
Products – Watch
The Video



518

Comfort2Go™



For workers on the go, Comfort2Go™ mats are the go-to choice that lives up to its name. A portable mat with a built-in handle, it's easy on the knees when you kneel and bolstering underfoot when you need some standing support.



A dual-layer anti-fatigue mat that features a long-lasting PVC surface and a premium nitrile rubber composite sponge base, A Comfort2Go™ mat measures 17" x 30" (43cm x 76cm). Protect yourself on the move with the mat that's always there when you need it.



SPECIFICATIONS

Compound: PVC/Nitrile-Infused Sponge

Warranty: 4 Years



ITEM NUMBER	SIZE	THICKNESS	COLOR
518.78x17x30BK	17" x 30" (43cm x 76cm)	7/8" (22mm)	BK



85,570

Number of injuries in maintenance and repair occupation for 2014

095

Clean Room Mat



Hard work can be messy. The Clean Room Mat will keep that mess from being tracked into other areas. The tacky surface pulls and traps dirt and dust from shoe soles during demolition, standing, asbestos remediation, and day-to-day operations.

Simply pull off and discard individually numbered sheets as needed (available in 30 or 60 sheets). Use on low-pile carpet, tile, or concrete surfaces.

ITEM NUMBER	SIZE	SHEETS PER MAT	COLOR
095.18x36	18" x 36" (46cm x 91cm)	30, 60 (WH only)	BL, WH
095.18x36WH-CS60	18" x 36" (46cm x 91cm)	30, 60 (WH only)	WH
095.18x45	18" x 45" (46cm x 114cm)	30, 60 (WH only)	BL, WH
095.18x45WH-CS60	18" x 45" (46cm x 114cm)	30, 60 (WH only)	WH
095.24x45	24" x 45" (61cm x 114cm)	30, 60 (WH only)	BL, WH
095.24x45WH-CS60	24" x 45" (61cm x 114cm)	30, 60 (WH only)	WH
095.2x3	2' x 3' (61cm x 91cm)	30	BL, WH
095.36x45	36" x 45" (91cm x 114cm)	30	BL, WH
095.3x5	3' x 5' (91cm x 152cm)	30	BL, WH



SPECIFICATIONS

Compound: Polyethylene

Warranty: 1 Year



092

PermaTack



PermaTack is designed for labs, clean rooms, and pharmacies that need serious long-term contamination control. The unique "tacky" surface removes up to 98% of contaminants from shoes. Just clean the surface and the mat's "tackiness" returns.

ITEM NUMBER	SIZE	THICKNESS	COLOR
092.18x27x48BL	27" x 48" (69cm x 122cm)	1/8" (3mm)	BL
092.18x36x54BL	36" x 54" (69cm x 137cm)	1/8" (3mm)	BL
092.18x27x72BL	27" x 72" (69cm x 1.9m)	1/8" (3mm)	BL
092.18x27x10BL	27" x 10' (69cm x 3m)	1/8" (3mm)	BL
092.18x27x20BL	27" x 20' (69cm x 6.1m)	1/8" (3mm)	BL
092.18x54x10BL	54" x 10' (137cm x 3m)	1/8" (3mm)	BL
092.18x54x20BL	54" x 20' (137cm x 6.1m)	1/8" (3mm)	BL

SPECIFICATIONS

Compound: Vinyl Polymer

Edges: Square

Warranty: 2 Years



223

Sole-Solution Foot Bath



NEW



The optimal solution for agriculture, food processing, and other facilities where contamination or grease build-up prevention is a necessity. With deep 2.5" (6cm) walls and 5-gallon (18.9 liter) capacity, the Sole-Solution foot bath is an affordable, effective solution that helps improve safety and fight cross-contamination.

PART NUMBER	UOM	SIZE	COLOR
223.2.5x31x38	EA	2.5" x 31" x 38" (6cm x 79cm x 97cm)	BK, BL, YL
223.2.5x31x38-CS5	CS	2.5" x 31" x 38" (6cm x 79cm x 97cm)	BK, BL, YL

Please specify color



SPECIFICATIONS

Compound: HDPE

(High-density polyethylene)

Edges: Molded Containment Walls

Warranty: 1 Year



229

Mud Chucker™



The name says it all: This rugged entrance solution was made to chuck mud. The recessed step-in area with rubber fingers on the sides and bottom remove mud, as well as dirt, grass, salt, and snow. The durable ridges and sidewalls work in all seasons, keeping the debris out of your building year-round.

Mud Chucker™ mats can be used as portable shoe scrapers for off-site jobs or traveling workers, or can be permanently installed at facility entryways.

ITEM NUMBER	SIZE	THICKNESS	COLOR
229.2.2x12.4x15.25	2 x 12 x 15 1/4" (5cm x 30cm x 39cm)	2.2" (56mm)	BK

SPECIFICATIONS

Compound: Natural Rubber

Warranty: 1 Year




SOLE-SOLUTION COMBO

For optimum effectiveness make it a combo and save!

MUD CHUCKER®



SOLE-SOLUTION FOOT BATH

TOGETHER IS
BETTER

Removes heavy debris from shoe sides & soles before entering

PRODUCT	PART NUMBER	UOM	COLOR
Sole-Solution Combo	223.COMBO	1 EA	BK, BL, YL




“While I’ll never go pro, I do enjoy a nice round of golf on the weekend. From the tee box to the green, every shot counts. Unfortunately, no matter how solid my shot is, when the golf course is in lousy condition and the greens aren’t maintained, my scorecard reflects it. Bogey, bogey, double bogey...you get the idea. That’s a lot like my job. There’s no room for error in my field, and mental focus is critical. Standing on the hard lab floor all day, I struggle to focus on anything but my aching back. My insoles help, but they just aren’t enough!”
– Dawn, Lab Technician

Concentration And Focus Is The Name Of The Game.

There is no room for fatigue, and no time to sit. Accuracy is a top priority.

**Add anti-microbial mats as part of
your PPE requirement standards**

Lab

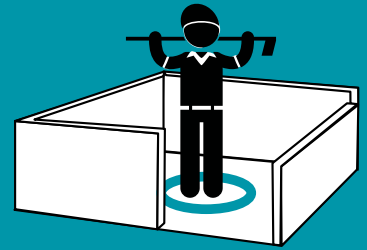

HEALTH, LAB, PHARMACY

Wearwell has a variety of products that deliver optimum support and address contamination concerns such as particulation, out-gassing, and the spread of bacteria. Your facility shares the concerns of healthcare and lab environments if:

- Areas are typically sterile and have like aesthetics
- Transition areas are crucial points for contamination control
- Team members need standing relief for long or multiple shifts

Anti-Microbial — Does not contribute to or support the survival or growth of microorganisms when tested in accordance with ASTM G21-96 (2002).

REJUVENATOR®

Rejuvenator® provides optimum performance in the field of labs and pharmacies. Not only does it have a clean consistent aesthetic, it also meets the USP 797 compliance standards for non-viable particulates.




Rejuvenator® flooring, runners, and workstation mats help your team stand stronger, longer. Whether you need to cover an entire lab, a multi-shift pharmacy, or just a single workstation, Rejuvenator® delivers the ultimate combination of durability, ergonomics, and awesome good looks! Manufactured entirely from urethane, this perennial all-star features an unparalleled lifetime-warranty. Simply put, we've engineered Rejuvenator® to outlast and outperform any would-be rivals. Rejuvenator® has quickly become the ergonomic floor surface of choice for top-performing companies worldwide.

UNIVERSAL REJUVENATOR® EDGING			
ITEM NUMBER	SIZE	THICKNESS	COLOR
502.58x2x39F	2" x 39" (5cm x 99cm)	5/8" (16mm)	BK, YL
502.58x2x39M	2" x 39" (5cm x 99cm)	5/8" (16mm)	BK, YL


F: Female connector M: Male connector

All Rejuvenator® edging is universal to all Rejuvenator® tiles

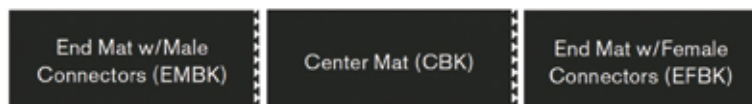

Need a longer runner?

Simply add more center mats for unlimited length!

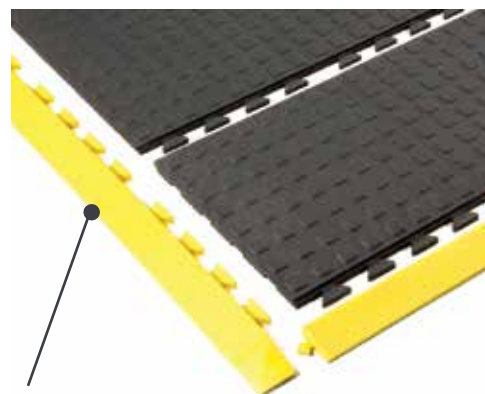

Rejuvenator's 2" (5cm) wide ramps provide a visual cue and transition for on-off access and are compatible with 502 and 503 flooring tiles.


502/503

Flooring



Available in domed and square designs, Rejuvenator® Flooring features large, 3' x 3' (91cm X 91cm) modules — and now new 1' x 3' (30cm x 91cm) modules as well — that interlock on all four sides to customize on site virtually any flooring configuration. The interlock is incredibly effective and also hidden so the ergonomic floor you've created is seamless and stable underfoot. Having the ability to customize in one-foot increments and finish off with beveled ramps (yellow or black) sets Rejuvenator® Flooring apart from all other urethane "wannabes."

ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x1x3BK	1' x 3' (30cm x 91cm)	5/8" (16mm)	BK
502.58x3x3BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x1x3BK	1' x 3' (30cm x 91cm)	5/8" (16mm)	BK
503.58x3x3BK	3' x 3' (91cm x 91cm)	5/8" (16mm)	BK

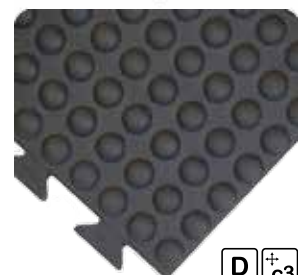

SPECIFICATIONS

Compound: Polyurethane
Edges: Optional 2" (5cm) -Wide
Safety Edging
Warranty: Lifetime



502/503

Runner



Rejuvenator® Runners give you the option to create 2' (61cm) - and 3' (91cm)-wide runs of ergonomic matting. With a female end and a male end, all that's left is to connect as many centers as you need for your space. The molded-in ramps reduce installation time and costs.

ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
502.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x2x5CBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EFBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x2x5EMBK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x3x5CBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EFBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503.58x3x5EMBK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK

C: Center
EF: End, Female
EM: End, Male



SPECIFICATIONS

Compound: Polyurethane
Edges: Molded-in Safety Bevel
Warranty: Lifetime

502/503

Workstation Mat



Rejuvenator® Workstation Mats provide an out-of-the-box anti-fatigue solution for workers who spend most of their shift standing at one station. Rejuvenator® Workstation Mats feature the same awesome aesthetics as the rest of the Rejuvenator® products, so your facility can look clean and consistent.

ITEM NUMBER	SIZE	THICKNESS	COLOR
502 Rejuvenator® Squared			
502.58x2x3BK	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK
502.58x2x5BK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
502.58x3x5BK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK
503 Rejuvenator® Domed			
503.58x2x3BK	2' x 3' (61cm x 91cm)	5/8" (16mm)	BK
503.58x2x5BK	2' x 5' (61cm x 152cm)	5/8" (16mm)	BK
503.58x3x5BK	3' x 5' (91cm x 152cm)	5/8" (16mm)	BK



SPECIFICATIONS

Compound: Polyurethane
Edges: Molded-in Safety Bevel
Warranty: Lifetime

















TILE-TOP™

Across laboratories, pharmacies, and medical environments, Tile-Top™ ergonomic matting is an MVP. Its smooth surface cleans easily and bounce-back rebound technology provides long term standing relief.

US REG. NO: 3,739,714



- Standing area extends to within 1.5" (4cm) - 3.5" (9cm) of surface edge
- Gravity or mechanical beveled for gradual transition to floor for optimum trip prevention

Compound	Urethane	PVC	Nitrile Rubber
Product Family	496 	494	419, 420
Description	Made from 100% recycled urethane sponge, SMART® is a durable matting base that combines comfort, ecology, and economy. Best suited for dry areas, this green material is a Wearwell exclusive.	Flex-Link™ is a PVC sponge comparable to those used by our competitors, at a similar price point. The difference is our tapered Flex-Link™ base, which offers a larger usable ergonomic area, reduces "sponge dust" and keeps our mats from sliding.	Anti-microbial (AM) top to bottom. Nitricell®, the AM nitrile rubber composite sponge offers maximum comfort and resilience, while the AM surface delivers additional abrasion and chemical resistance.
Anti-Microbial	★ ★	★ ★	★ ★ ★
Standing Area	★	★ ★	★ ★ ★
Rebound	★ ★	★	★ ★ ★
Life Expectancy	★	★ ★	★ ★ ★
Bevel	★	★ ★	★ ★ ★
Green	★ ★ ★	★	★
Price Point	★ ★ ★	★ ★	★
Value	★	★ ★	★ ★ ★
Customization	★	★	★ ★ ★
Warranty	1 Year	3 Years	4 Years
Application	 	 	 
Industry	  		
Colors	   		



	1/2" (13mm) THICK ITEM NUMBERS	7/8" (22mm) THICK ITEM NUMBERS	SIZE	COLOR
SMART®	496 SMART® Tile-Top™			
	496.12x2x3	496.78x2x3	2' x 3' (61cm x 91cm)	BK, BL, CH, GY
	496.12x2x60	496.78x2x60	2' x 60' (61cm x 18m)	BK, BL, CH, GY
	496.12x3x5	496.78x3x5	3' x 5' (91cm x 152cm)	BK, BL, CH, GY
	496.12x3x60	496.78x3x60	3' x 60' (91cm x 18m)	BK, BL, CH, GY
	496.12x4x60	496.78x4x60	4' x 60' (122cm x 18m)	BK, BL, CH, GY
Flex-Link™	494 Tile-Top™ Select			
	494.12x2x3	494.78x2x3	2' x 3' (61cm x 91cm)	BL, BWH, CH, GY
	494.12x2x60	494.78x2x60	2' x 60' (61cm x 18m)	BL, BWH, CH, GY
	494.12x3x5	494.78x3x5	3' x 5' (91cm x 152cm)	BL, BWH, CH, GY
	494.12x3x60	494.78x3x60	3' x 60' (91cm x 18m)	BL, BWH, CH, GY
	494.12x4x60	494.78x4x60	4' x 60' (122cm x 18m)	BL, BWH, CH, GY
Nitricell®	ITEM NUMBER	SIZE	THICKNESS	COLOR
	419 UltraSoft Tile-Top™ AM			
	419.78x2x3AM	2' x 3' (61cm x 91cm)	7/8" (22mm)	BK, BL, CH, GY
	419.78x2x60AM	2' x 60' (61cm x 18m)	7/8" (22mm)	BK, BL, CH, GY
	419.78x3x10AM	3' x 10' (91cm x 3m)	7/8" (22mm)	BK, BL, CH, GY
	419.78x3x5AM	3' x 5' (91cm x 152cm)	7/8" (22mm)	BK, BL, CH, GY
	419.78x3x60AM	3' x 60' (91cm x 18m)	7/8" (22mm)	BK, BL, CH, GY
	419.78x4x60AM	4' x 60' (122cm x 18m)	7/8" (22mm)	BK, BL, CH, GY
	420 Tile-Top™ AM			
	420.12x2x3AM	2' x 3' 61cm x 91cm)	1/2" (13mm)	BK, BL, CH, GY
	420.12x2x60AM	2' x 60' (61cm x 18m)	1/2" (13mm)	BK, BL, CH, GY
	420.12x3x10AM	3' x 10' (91cm x 3cm)	1/2" (13mm)	BK, BL, CH, GY
	420.12x3x5AM	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK, BL, CH, GY
	420.12x3x60AM	3' x 60' (91cm x 18m)	1/2" (13mm)	BK, BL, CH, GY
	420.12x4x60AM	4' x 60' (122cm x 18m)	1/2" (13mm)	BK, BL, CH, GY

Available in cuts up to 60' (18m)

092

PermaTack



PermaTack is designed for labs, clean rooms, and pharmacies that need serious long-term contamination control. The unique "tacky" surface removes up to 98% of contaminants from shoes. Just clean the surface and the mat's "tackiness" returns.

ITEM NUMBER	SIZE	THICKNESS	COLOR
092.18x27x48BL	27" x 48" (69cm x 122cm)	1/8" (3mm)	BL
092.18x36x54BL	36" x 54" (91cm x 137cm)	1/8" (3mm)	BL
092.18x27x72BL	27" x 72" (69cm x 1.8m)	1/8" (3mm)	BL
092.18x27x10BL	27" x 10' (69cm x 3m)	1/8" (3mm)	BL
092.18x27x20BL	27" x 20' (69cm x 6.1m)	1/8" (3mm)	BL
092.18x54x10BL	54" x 10' (1.4m x 3m)	1/8" (3mm)	BL
092.18x54x20BL	54" x 20' (1.4m x 6.1m)	1/8" (3mm)	BL


SPECIFICATIONS

Compound: Vinyl Polymer

Edges: Square

Warranty: 2 Years

D



095

Clean Room Mat



Clean Room Mats are the easy solution for common contamination-control issues. They are comprised of stacks of "tacky" film sheets that collect dirt and debris from shoes. Just peel away a full sheet to expose a new one.

ITEM NUMBER	SIZE	SHEETS PER MAT	COLOR
095.18x36	18" x 36" (46cm x 91cm)	30, 60 (WH only)	BL, WH
095.18x36WH-CS60	18" x 36" (46cm x 91cm)	30, 60 (WH only)	WH
095.18x45	18" x 45" (46cm x 114cm)	30, 60 (WH only)	BL, WH
095.18x45WH-CS60	18" x 45" (46cm x 114cm)	30, 60 (WH only)	WH
095.24x45	24" x 45" (46cm x 61cm)	30, 60 (WH only)	BL, WH
095.24x45WH-CS60	24" x 45" (46cm x 61cm)	30, 60 (WH only)	WH
095.2x3	2' x 3' (61cm x 91cm)	30	BL, WH
095.36x45	36" x 45" (91cm x 114cm)	30	BL, WH
095.3x5	3' x 5' (91cm x 152cm)	30	BL, WH

SPECIFICATIONS

Compound: Polyethylene

Edges: Square

D



580

Autoclavable Mat



Autoclavable Mat is the standing product of choice for sterile environments such as hospital ORs, surgery centers, and laboratories. The flexible and resilient latex-free non-porous rubber surface is 100% anti-microbial and provides workers with relief during long shifts and periods of extended standing.

ITEM NUMBER	SIZE	THICKNESS	COLOR
580.12x2x3GY	2' x 3' (61cm x 91cm)	1/2" (13mm)	GY

SPECIFICATIONS

Compound: NBR: Nitrile Rubber

Edges: Beveled

Warranty: 1 Year

D



Runners




RUNNERS

Choose from a variety of surface patterns and thicknesses to suit your needs. These products protect your team and your facility, whether in an office or in a plant. There's room for a runner on your team if:

- Work areas are slick, have high traffic, or need protection from wear and debris
- You require a low-profile solution with good abrasion resistance
- Your goals include eliminating slips and improving facility maintenance

475

Kushion Walk

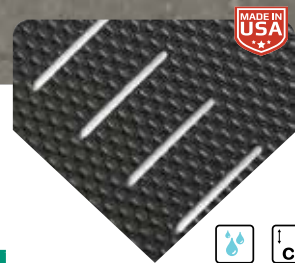

At 3/8" (10mm) thick with a super-cut-resistant formulation, Kushion Walk has the enduring and fatigue-fighting characteristics that tough workplaces demand.



Use it to cover grated walkways and mezzanines, under heavy equipment, and to guard against slips and falls.



ITEM NUMBER	SIZE	THICKNESS	COLOR	SURFACE TEXTURE
475.38x2x60SLT	2' x 60' (61cm x 18m)	3/8" (10mm)	BK, BYL	SLT
475.38x2x60UNS	2' x 60' (61cm x 18m)	3/8" (10mm)	BK, BYL	UNS
475.38x3x5SLT	3' x 5' (91cm x 18m)	3/8" (10mm)	BK, BYL	SLT
475.38x3x5UNS	3' x 5' (91cm x 152cm)	3/8" (10mm)	BK, BYL	UNS
475.38x3x60SLT	3' x 60' (91cm x 18m)	3/8" (10mm)	BK, BYL	SLT
475.38x3x60UNS	3' x 60' (61cm x 18m)	3/8" (10mm)	BK, BYL	UNS

Please specify Slotted or Unslotted when ordering.

Available in cuts up to 60' (18m)

SPECIFICATIONS

Compound: PVC


Edges: Square

Warranty: 1 Year



480

Abrasive Coated Kushion Walk



Abrasive Coated Kushion Walk features our unique GRITSHIELD™ surface, specifically designed for the slickest locations. With slips and falls being such dangers in today's workplaces, Abrasive Coated Kushion Walk offers a sure-footed solution for areas requiring high traction.



ITEM NUMBER	SIZE	THICKNESS	COLOR	SURFACE TEXTURE
480.38x2x60SLTBK	2' x 60' (61cm x 18m)	3/8" (10mm)	BK	SLT
480.38x2x60UNSBK	2' x 60' (61cm x 18m)	3/8" (10mm)	BK	UNS
480.38x3x60SLTBK	3' x 60' (91cm x 18m)	3/8" (10mm)	BK	SLT
480.38x3x60UNSBK	3' x 60' (91cm x 18m)	3/8" (10mm)	BK	UNS

Available in cuts up to 60' (18m)

SPECIFICATIONS

Compound: PVC

Edges: Square

Warranty: 1 Year



347

H.T. Runner

NEW



The perfect solution for High Temperature and High Traffic areas where anti-fatigue isn't the primary objective. textured rubber surface assures solid footing and can be used for semi-permanent installations with common mastics.



ITEM NUMBER	SIZE	THICKNESS	COLOR
347.564x3x75BK	3' x 75' (91cm x 23m)	5/64" (2mm)	BK
347.564x4x75BK	4' x 75' (122cm x 23m)	5/64" (2mm)	BK

Available in cuts up to 75' (23m)

SPECIFICATIONS

Compound: Rubber

Edges: Square

Warranty: 1 Year



305

Heavy Duty Corrugated



Our thickest and toughest runner, Heavy Duty Corrugated protects floors in heavily trafficked areas and provides long-lasting slip and chemical resistance in nearly all environments. One hundred percent vinyl, it can be custom sized up to 75' (23m) in length.



ITEM NUMBER	SIZE	THICKNESS	COLOR
305.14x2x75BK	2' x 75' (61cm x 23m)	1/4" (6mm)	BK
305.14x3x75BK	3' x 75' (91cm x 23m)	1/4" (6mm)	BK
305.14x4x75BK	4' x 75' (122cm x 23m)	1/4" (6mm)	BK

Available in cuts up to 75' (23m)

SPECIFICATIONS

Compound: PVC

Edges: Square

Warranty: 1 Year



405

Enviro Mat



Made of more than 80% post-consumer recycled material, Enviro Mat is one of the most environmentally friendly mats on the market. Designed for impact resistance, it is a great choice for work areas that involve heavy objects.

ITEM NUMBER	SIZE	THICKNESS	COLOR
405.38x2x105BK	2' x 105' (61cm x 32m)	3/8" (5mm)	BK
405.38x3x105BK	3' x 105' (91cm x 32m)	3/8" (5mm)	BK
405.38x4x105BK	4' x 105' (122cm x 32m)	3/8" (5mm)	BK

Available in cuts up to 105'



SPECIFICATIONS

Compound: 100% Recycled Rubber

Edges: Square

Warranty: 1 Year



385

Diamond-Plate



Our industrial strength Diamond-Plate runner protects floors in busy work areas from heavy foot traffic and provides workers with increased traction. One hundred percent vinyl, it can be custom sized up to 75' (23m) in length.

ITEM NUMBER	SIZE	THICKNESS	COLOR
385.316x2x75	2' x 75' (61cm x 23m)	3/16" (5mm)	BK, BYL, GY
385.316x3x75	3' x 75' (91cm x 23m)	3/16" (5mm)	BK, BYL, GY
385.316x4x75	4' x 75' (122cm x 23m)	3/16" (5mm)	BK, BYL, GY

Available in cuts up to 75' (23m)



SPECIFICATIONS

Compound: PVC

Edges: Square

Warranty: 1 Year



381

Standard Corrugated Vinyl



Standard Corrugated Vinyl adds traction where needed while protecting floors from wear and chemical damage. Our most popular runner, it is easy to clean, has a low maintenance cost, and helps reduce the frequency of comprehensive floor cleanings.

ITEM NUMBER	SIZE	THICKNESS	COLOR
381.18x2x105BK	2' x 105' (61cm x 32m)	1/8" (3mm)	BK
381.18x2x150BK	2' x 150' (61cm x 46m)	1/8" (3mm)	BK
381.18x2x75BK	2' x 75' (61cm x 23m)	1/8" (3mm)	BK
381.18x3x105BK	3' x 105' (91cm x 32m)	1/8" (3mm)	BK
381.18x3x150BK	3' x 150' (91cm x 46m)	1/8" (3mm)	BK
381.18x3x75BK	3' x 75' (91cm x 23m)	1/8" (3mm)	BK
381.18x4x105BK	4' x 105' (122cm x 32m)	1/8" (3mm)	BK
381.18x4x150BK	4' x 150' (122cm x 46m)	1/8" (3mm)	BK
381.18x4x75BK	4' x 75' (122cm x 23m)	1/8" (3mm)	BK

Available in cuts up to 150' (46m)



SPECIFICATIONS

Compound: PVC

Edges: Square

Warranty: 1 Year



391

KleenSweep



Designed for areas with moderate foot traffic, this round-ribbed vinyl runner is especially easy to clean. Made with post-consumer recycled material, KleenSweep runners are 1/8" (3mm) thick and can be custom sized up to 105' (32m) in length.

ITEM NUMBER	SIZE	THICKNESS	COLOR
391.18x2x105BK	2' x 105' (61cm x 32m)	1/8" (3mm)	BK
391.18x3x105BK	3' x 105' (91cm x 32m)	1/8" (3mm)	BK
391.18x4x105BK	4' x 105' (122cm x 32m)	1/8" (3mm)	BK

Available in cuts up to 105' (32m)

**SPECIFICATIONS**

Compound: Vinyl

Edges: Square

Warranty: 1 Year



356

Radial Runner

NEW



Designed for high-traffic interior walkways, Radial, with its signature circular pattern, complies with the National Fire Protection Association's (NFPA) flammability specifications for Type II construction, meaning that it is non-combustible and can be permanently installed.

ITEM NUMBER	SIZE	THICKNESS	COLOR
356.18x3x50	3' x 50' (91cm x 15m)	1/8" (3mm)	BK, GY
356.18x4x50	4' x 50' (122cm x 15m)	1/8" (3mm)	BK, GY

Available in cuts up to 50' (15m)

**SPECIFICATIONS**

Compound: Vinyl

Edges: Square

Warranty: 1 Year

Grey



383

Textured Kleen-Rite



This low-profile, versatile runner is made from textured thermoplastic rubber and has a tensile strength of 1,000 lbs (454kg). Designed to prevent slips on slick floors, it can also be sized for use as a shelf, drawer, or locker liner.

ITEM NUMBER	SIZE	THICKNESS	COLOR
383.332x3x150BK	3' x 150' (91cm x 46m)	3/32" (2mm)	BK
383.332x3x75BK	3' x 75' (91cm x 23m)	3/32" (2mm)	BK
383.332x4x150BK	4' x 150' (122cm x 46m)	3/32" (2mm)	BK
383.332x4x75BK	4' x 75' (122cm x 23m)	3/32" (2mm)	BK

Available in cuts up to 150' (46m)

**SPECIFICATIONS**

Compound: TPE

Edges: Square

Warranty: 1 Year



Entrance



When athletes cross the threshold onto the playing field, they leave the world behind to focus on the game at hand. The same should go for the workplace, where mental and material debris need to be checked at the door. Use entrance mats to keep extraneous dirt outside and your facility in top condition.

220

Multi-Guard Heavy Duty

Multi-Guard Heavy Duty entrance mats use thousands of rubber scrapers to remove dirt, mud, and other debris from shoes. Capable of capturing pounds of dirt between cleanings, Multi-Guard Heavy Duty defends your entryways from crud — period.

ITEM NUMBER	SIZE	THICKNESS	COLOR
220.12x24x32BK	24" x 32" (61cm x 81cm)	1/2" (13mm)	BK
220.12x28x46BK	28" x 46" (71cm x 117cm)	1/2" (13mm)	BK
220.12x32x39BK	32" x 39" (81cm x 99cm)	1/2" (13mm)	BK
220.12x3x5BK	3' x 5' (91cm x 152cm)	1/2" (13mm)	BK
220.12x3x6BK	3' x 6' (91cm x 1.8m)	1/2" (13mm)	BK



SPECIFICATIONS

Compound: GR: Natural Rubber
Edges: 1" (2.5cm) Molded and Beveled
Warranty: 1 Year



224

UpFront Scraper

UpFront Scraper mats are the industry standard for economical entrance mats. Both the solid and drainage versions do a great job preventing dirt and moisture from entering buildings. UpFront Scraper gets the dirty work done.

ITEM NUMBER	SIZE	THICKNESS	COLOR	SURFACE TEXTURE
224.516x3x5GRBK	3' x 5' (91cm x 152cm)	5/16" (8mm)	BK	UNS
224.516x3x5GRSLTBK	3' x 5' (91cm x 152cm)	5/16" (8mm)	BK	SLT

Please specify Slotted or Unslotted when ordering.



SPECIFICATIONS

Compound: SBR: Natural Rubber
Edges: Tapered
Warranty: 1 Year



227

OutFront Reversible

A versatile scraper mat, OutFront Reversible provides an all-season line of defense for entryways. One side is designed to remove heavy debris and snow; the other side dislodges the dirt and moisture that comes with more moderate weather.

ITEM NUMBER	SIZE	THICKNESS	COLOR
227.716x3x6BK	3' x 6' (91cm x 1.9m)	7/16" (11mm)	BK



SPECIFICATIONS

Compound: SBR: Natural Rubber
Edges: Tapered
Warranty: 1 Year




229

Mud Chucker™ Mat

The name says it all — this rugged entrance mat was made to chuck mud. The recessed step-in area with rubber fingers on the sides and bottom remove mud, as well as dirt, grass, salt, and snow. The mat's durable ridges and sidewalls work in all seasons, keeping the debris out of your building year-round.

Mud Chucker™ mat can be used as portable shoe scrapers for off-site jobs or traveling workers, or can be permanently installed at facility entryways.

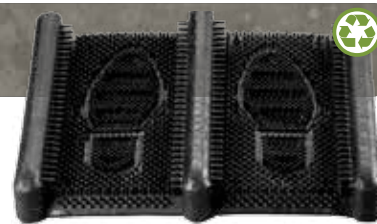

SPECIFICATIONS

Compound: Natural Rubber

Warranty: 1 Year



ITEM NUMBER	SIZE	THICKNESS	COLOR
229.2.2x12.4x15.25	2" x 12" x 15 1/4" (5cm x 30cm x 39cm)	2.2" (55mm)	BK



095

Clean Room Mat



Clean Room Mats are the easy solution for common contamination-control issues. They are comprised of stacks of "tacky" film sheets that collect dirt and debris from shoes. Just peel away a full sheet to expose a new one.

ITEM NUMBER	SIZE	SHEETS PER MAT	COLOR
095.18x36	18" x 36" (46cm x 91cm)	30, 60 (WH only)	BL, WH
095.18x36WH-CS60	18" x 36" (46cm x 91cm)	30, 60 (WH only)	WH
095.18x45	18" x 45" (46cm x 114cm)	30, 60 (WH only)	BL, WH
095.18x45WH-CS60	18" x 45" (46cm x 114cm)	30, 60 (WH only)	WH
095.24x45	24" x 45" (46cm x 61cm)	30, 60 (WH only)	BL, WH
095.24x45WH-CS60	24" x 45" (46cm x 61cm)	30, 60 (WH only)	WH
095.2x3	2' x 3' (61cm x 91cm)	30	BL, WH
095.36x45	36" x 45" (91cm x 114cm)	30	BL, WH
095.3x5	3' x 5' (91cm x 152cm)	30	BL, WH



SPECIFICATIONS

Compound: Polyethylene

Edges: Square



Accessories



Accessories

Mats aren't supposed to walk, people are, but sometimes on highly polished surfaces everything can be slick. All the more important to have a mat in that location. Use adhesive accessories to secure the mat to where it is supposed to be, for sure footed traction.



GripSafe Reflective Tape 050

This heavy-duty reflective tape prevents mats from sliding on almost any surface. Use it also to eliminate trip hazards and define borders in high-traffic areas.

ITEM NUMBER	SIZE
050.4x45YL	4" x 45' (10cm x 13.8m)



GripStrips 051

These two-sided tacky strips are designed to keep mats in place on highly polished surfaces. The strips remain sticky after cleaning so they can be reused.

ITEM NUMBER	SIZE
051.6x6BL	6" x 6" (15cm x 15cm)



LockFast 053

Tiny grippers on this tape anchor both carpet- and sponge-backed mats on carpeted surfaces. No additional adhesives are required — just peel, cut, stick and press.

ITEM NUMBER	SIZE
053.1x75BK	1" x 75' (3cm x 23m)



Safety Track 698

This adhesive strip is a convenient way to add traction to existing interior ramps, ladders and walkways. It readily adheres to concrete, metal and wood.

ITEM NUMBER	SIZE	COLOR
698.12x60BK	12" x 60' (30cm x 18m)	BK
698.18x60BK	18" x 60' (46cm x 18m)	BK
698.1x60BK	1" x 60' (3cm x 18m)	BK
698.2x60BK	2" x 60' (5cm x 18m)	BK
698.4x60BK	4" x 60' (10cm x 18m)	BK
698.6x60BK	6" x 60' (15cm x 18m)	BK
698.6x24BK	6" x 24" (15cm x 61cm)	BK

Index & Product Specifications

Group Code	Product Name	Page	Recycled Content	Flammability
092	PermaTack	66, 74	<10%	
095	Clean Room Mat	66, 74, 81	<10%	
110-DP	InVision w/Diamond-Plate Surface Pattern	30	<10%	MVSS 302 / "A" Rating
110-SM	InVision w/Smooth Surface Pattern	30	<10%	MVSS 302 / "A" Rating
220	Heavy Duty Multi-Guard	80	>33%	DOC FF1-70 / Meets Standards
222-ST	Sanitizing Footbath Mat Standard	43	>33%	DOC FF1-70 / Meets Standards
222-TW	Sanitizing Footbath Mat Tall Wall	43	>33%	DOC FF1-70 / Meets Standards
223	Sole-Solution Foot Bath	43, 67	>50% (Black)	
224-SLT	Upfront Scraper Mat Slotted	80	>33%	MVSS 302 / "A" Rating
224-UNS	Upfront Scraper Mat Unslotted	80	>33%	MVSS 302 / "A" Rating
227	OutFront Reversible	80	>33%	MVSS 302 / "A" Rating
229	Mud Chucker™	67, 81	>50%	MVSS 302 / "A" Rating
300	Starting Line	47	>95%	
305	Heavy Duty Corrugated	76	>50%	MVSS 302 / "A" Rating
347	H.T. Runner	78	>20%	MVSS 302 / 'A'; Rating
356	Radial	78	<10%	MVSS 302 / "A" Rating
381	Standard Corrugated Vinyl	77	>50%	MVSS 302 / "A" Rating
383	Textured Kleen-Rite	78	>50%	MVSS 302 / "A" Rating
385	Diamond-Plate	77	>50%	MVSS 302 / "A" Rating
391	KleenSweep	78	>50%	MVSS 302 / "A" Rating
405	Enviro Mat	77	>50%	MVSS 302 / "A" Rating
414	UltraSoft Diamond-Plate	26-27, 46	>50%	MVSS 302 / "A" Rating
415	Diamond-Plate SpongeCote®	26-27, 46	>50%	MVSS 302 / "A" Rating
416	Diamond-Plate w/GRITSHIELD™ UltraSoft	26-27	>50%	MVSS 302 / "A" Rating
419	UltraSoft Tile-Top™ AM	72-73	<10%	MVSS 302 / "A" Rating
420	Tile-Top™ AM	72-73	<10%	MVSS 302 / "A" Rating
423 / 423M	Soft Rock	28		MVSS 302 / 'A'; Rating
425	Grate-Deck (Coming Summer 2016)	28		
427	Soft Step	49	<10%	DOC FF1-70 / Flame Retardant Rating
431	Corrugated SpongeCote®	31	>50%	MVSS 302 / "A" Rating
433	ComfortPro™	31	>50%	DOC FF1-70 / Flame Retardant Rating
438	LightWorks Inspection Mat	29	<10%	MVSS 302 / "A" Rating
440	Ultra-Tred ArmorCote	47	<10%	DOC FF1-70 / Flame Retardant Rating
442	Deluxe Tuf Sponge	48	<10%	DOC FF1-70 / Flame Retardant Rating
444	Deluxe Soft Step	49	<10%	DOC FF1-70 / Flame Retardant Rating
447	WeldSafe® UltraSoft	29	>20%	MVSS 302 / "A" Rating
451	Tuf Sponge	48	<10%	DOC FF1-70 / Flame Retardant Rating
452	Diamond Tuf Sponge	48	<10%	DOC FF1-70 / Flame Retardant Rating
454	Ortho Stand™	41	>50%	MVSS 302 / "A" Rating
459	Endurable	47	<10%	MVSS 302 / "A" Rating
468	Workrite II	40	>33%	MVSS 302 / "A" Rating
470	Modular Diamond-Plate Grease Proof	40	>50%	MVSS 302 / "A" Rating
472-GR	Modular WorkSafe® Light Grease Resistant	40	>33%	MVSS 302 / "A" Rating
472-GP	Modular WorkSafe® Light Grease Proof	40	>33%	MVSS 302 / "A" Rating
474	WorkRite	41	>33%	MVSS 302 / "A" Rating
475-SLT	Kushion Walk Slotted	76	<10%	MVSS 302 / "A" Rating
475-UNS	Kushion Walk Unslotted	76	<10%	MVSS 302 / "A" Rating
476-GR	Industrial WorkSafe® GR	40	>33%	MVSS 302 / "A" Rating
476-NBR	Industrial WorkSafe® NBR	40	>15%	MVSS 302 / "A" Rating
477	WorkSafe® Grease Resistant	41	>33%	MVSS 302 / "A" Rating
478	WorkSafe® Light CFR	40	<10%	MVSS 302 / "A" Rating
480-SLT	Abrasive Coated Kushion Walk Slotted	76	<10%	MVSS 302 / "A" Rating
480-UNS	Abrasive Coated Kushion Walk Unslotted	76	<10%	MVSS 302 / "A" Rating
482	Grade "A"®	43	<10%	MVSS 302 / "A" Rating
494	Tile-Top™ Select	72-73	<10%	MVSS 302 / "A" Rating
495	D-P Select UltraSoft	26-27	>50%	MVSS 302 / "A" Rating
496	SMART® Tile Top	72-73	>50%	MVSS 302 / "A" Rating
497	SMART® D-P UltraSoft	26-27	>80%	MVSS 302 / "A" Rating

Tabor Abrasion	Temp Range (°F)	Coefficient of Friction	Compression Deflection
	32-123	2.02 per ASRM C1028, 4.05 Tortus	
	32-123	2.02 per ASRM C1028, 4.05 Tortus	
Fed Std 191 / 1000g, CS-17 wheel	-10-120	ASTM F1677 / Dry: .68	ASTM D575 / Deflection @ 35psi, mm = 13.20
Fed Std 191 / 1000g, CS-17 wheel	-10-120	ASTM F1677 / Dry: .68	ASTM D575 / Deflection @ 35psi, mm = 13.20
	10-120	ASTM F1677 / Dry: >1.0 / Wet: .98	
	10-120	ASTM F1677 / Dry: >1.0 / Wet: .98	
	10-120	ASTM F1677 / Dry: >1.0 / Wet: .98	
	0 to 110	ASTM F1677/ Dry: COF = 1.10 / Wet:COF = .75	ASTM D575 / .293 @ 35 psi
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: .91 / Wet: .65	
Fed Std 191 / 1% lost @ 1,000 cycles	>500 mp*	ASTM F1677 / Dry: COF = 1.10 / Wet COF = .32	ASTM D575 / Deflection @ 35 psi, mm=7.85
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: 1.1 / Wet: .67	
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: .91 / Wet: .65	
Fed Std 191 / 1% lost @ 1,000 cycles	0-600	ASTM F1677 / Dry: 1.1 / Wet: .67	
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: .68 / Wet: .17	
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: .84 / Wet: .77	
Fed Std 193 / <5% lost @ 1,000 cycles			
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: .68 / Wet: .17	ASTM D575 / Deflection @ 35psi, mm = 13.20
Fed Std 191 / 1% lost @ 1,000 cycles	-10-120	ASTM F1677 / Dry: .68 / Wet: .17	ASTM D575 / Deflection @ 35psi, mm = 8.43
Fed Std 191 / 1% lost @ 1,000 cycles	0-110	ASTM F1677 / Dry: 1.10 / Wet: 1.0	ASTM D575 / Deflection @ 35psi, mm = .50
Fed Std 191 / 1,000g, CS-17 wheel	0-110	ASTM F1677 / Dry: .78	ASTM D575 / Deflection @ 35psi, mm = .472
Fed Std 193 / <1% lost @ 1,000 cycles	0-110	ASTM F1677 / Dry: .78	ASTM D575 / Deflection @ 35psi, mm = .343
Federal Standard 191 / 1000g, CS-17 wheel	0 to 110	ASTM F1677 / Dry: COF = .78	
Fed Std 191 / 2% lost @ 1,000 cycles	20-110	ASTM F1677 / Dry: .60	
Fed Std 193 / <1% lost @ 1,000 cycles	20-110	ASTM F1677 / Dry: .60	ASTM D575 / Deflection @ 35psi, mm = .337
Fed Std 191 / 1% lost @ 1,000 cycles	20-110	ASTM F1677 / Dry: .60	ASTM D575 / Deflection @ 35psi, mm = .310
Fed Std 191 / 1,000g, CS-17 wheel	-10-120	ASTM F1677 / Dry: .84 / Wet: .77	
Fed Std. 193 / 13% lost @ 1,000 cycles	20-110	ASTM F1677 / Dry: .60	ASTM D575 / Deflection @ 35psi, mm = .178
Fed Std 191 Modified / 2% lost @ 1,000 cycles	0-110	ASTM F1677 / Dry: .94 / Wet: .72	ASTM D575 / Deflection @ 35psi, mm = .276
Fed Std 191 Modified / 2% lost @ 1,000 cycles	20-110	ASTM F1677 / Dry: .60	ASTM D395-98 / 20%
Fed Std 191 / 1% lost @ 1,000 cycles	>500 mp*	ASTM F1677 / Dry: .90 / Wet: .36	ASTM D575 / Deflection @ 35 psi, mm = 7.85
Fed Std 191 Modified / 2% lost @ 1,000 cycles	0-100	ASTM F1677 / Dry: .94 / Wet: .72	ASTM D575 / Deflection @ 35psi, mm = .205
Fed Std 191 Modified / 2% lost @ 1,000 cycles	0-110	ASTM F1677 / Dry: .94 / Wet: .72	ASTM D575 / .205 @ 35 psi
Fed Std. 193 / 2% lost @ 1,000 cycles	10-120	ASTM F1677 / Dry: .90 / Wet: .36	
Fed Std 191 / 2% lost @ 1,000 cycles		ASTM F1677 / Dry: .91	ASTM D575 / .23 inches @ 35 psi
Fed Std 191 / 1% lost @ 1,000 cycles	10-110	ASTM F1677 / Dry: COF = > .90 / Wet: COF = .34	
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: >.84 / Wet: .78 / Oily: .34	ASTM D575 / Deflection @ 35 psi, mm = 4.10
	-50-250	ASTM F1677 / Dry: >.84 / Wet: .78 / Oily: .34	ASTM D575 / Deflection @ 35 psi, mm = 4.10
	-50-250	ASTM F1677 / Dry: >.84 / Wet: .78 / Oily: .34	ASTM D575 / Deflection @ 35 psi, mm = 4.10
Fed Std 191 / 1% lost @ 1,000 cycles	10-110	ASTM F1677 / Dry: > .78 / Wet: .68	
Fed Std 193 / <3% lost @ 1,000 cycles		ASTM F1677 / Dry: 1.03 / Wet: .81	
Fed Std 193 / <3% lost @ 1,000 cycles		ASTM F1677 / Dry: 1.03 / Wet: .81	
Fed Std 191 / 1% lost @ 1,000 cycles	10-110	ASTM F1677 / Dry: .78 / Wet: .68	ASTM D575 / Deflection @ 35psi, mm = 4.10
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: .78 / Wet: .68	
Fed Std 191 / 1% lost @ 1,000 cycles	10-120	ASTM F1677 / Dry: > .90	
	10-250	ASTM F1677 / Dry: > .90 / Wet: .36	ASTM D575 / Deflection @ 35 psi, mm = 4.10
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: 1.10 / Wet: 1.10	
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: 1.10 / Wet: 1.10	
	-20-250	ASTM F1677 / Dry: .78 / Wet: .68	
Fed Std 191 / 1000g, CS-17 wheel	0-110	ASTM F1677 / Dry: .79	ASTM D575 / Deflection @ 35 psi, mm = .237
Fed Std 191 / 1000g, CS-17 wheel	0-110	ASTM F1677 / Dry: .68 / Wet: .17	ASTM D575 / Deflection @ 35 psi, mm = .315
Fed Std 191 / 1000g, CS-17 wheel	0-110	ASTM F1677 / Dry: .79	
Fed Std 191 / 1000g, CS-17 wheel	-10-120	ASTM F1677 / Dry: .68 / Wet: .17	ASTM D395-98 / 20%


*melting point

Index & product specifications

Group Code	Product Name	Page	Recycled Content	Flammability
502-F	Rejuvenator® Squared Interlocking Tile	14, 70	<10%	MVSS 302 / "A" Rating
502-M	Rejuvenator® Squared Workstaion Mat	14, 70	<10%	MVSS 302 / "A" Rating
502-R	Rejuvenator® Squared Modular Runner	14, 46, 70	<10%	MVSS 302 / "A" Rating
503-F	Rejuvenator® Domed Interlocking Tile	14, 70	<10%	MVSS 302 / "A" Rating
513-DP	SubStance w/D-P Pattern (See Website)		<10%	
513-PB	SubStance w/Pebble Pattern (See Website)		<10%	
514	ROVER™	64	<10%	MVSS 302 / "A" Rating
515	ROVER™	64	<10%	MVSS 302 / "A" Rating
518	Comfort2Go™	65	>50%	MVSS 302 / "A" Rating
540	F.I.T.™ Open	22	>80%	MVSS 302 / "A" Rating
541	F.I.T.™ Solid	23	>80%	MVSS 302 / "A" Rating
542	F.I.T.™ Open w/GRITSHIELD™	23	>80%	MVSS 302 / "A" Rating
543	F.I.T.™ Solid w/GRITSHIELD™	23	>80%	MVSS 302 / "A" Rating
544	F.I.T.™ Kits	36	>80%	MVSS 302 / "A" Rating
545	F.I.T.™ Kits w/GRITSHIELD™	36	>80%	MVSS 302 / "A" Rating
546	F.I.T.™ Emergency Shower and Eyewash	37	>80%	MVSS 302 / "A" Rating
552	ErgoDeck® w/Integrated No-Slip Cleats Solid	20, 34	>80%	MVSS 302 / "A" Rating
553	ErgoDeck® w/Integrated No-Slip Cleats Open	20, 34	>80%	MVSS 302 / "A" Rating
553	ErgoDeck® No-Slip Kit	34	>80%	MVSS 302 / "A" Rating
554	ErgoDeck® w/Steel No-Slip Cleats Solid	21	>80%	MVSS 302 / "A" Rating
555	ErgoDeck® w/Steel No-Slip Cleats-Open	21	>80%	MVSS 302 / "A" Rating
556	ErgoDeck® Comfort Solid	16	>80%	MVSS 302 / "A" Rating
556	ErgoDeck® Comfort Kit	35	>80%	MVSS 302 / "A" Rating
557	ErgoDeck® ESD	57	>80%	MVSS 302 / "A" Rating
558	ErgoDeck® Comfort Open	16	>80%	MVSS 302 / "A" Rating
560	ErgoDeck® HD Open	18	>80%	MVSS 302 / "A" Rating
561	ErgoDeck® HD Open w/GRITSHIELD™	18	>80%	MVSS 302 / "A" Rating
562	ErgoDeck® HD Solid	18	>80%	MVSS 302 / "A" Rating
563	ErgoDeck® HD Solid w/GRITSHIELD™	18	>80%	MVSS 302 / "A" Rating
564	ErgoDeck® GP Open	17	>80%	MVSS 302 / "A" Rating
565	ErgoDeck® GP Open w/GRITSHIELD™	17	>80%	MVSS 302 / "A" Rating
566	ErgoDeck® GP Solid	17	>80%	MVSS 302 / "A" Rating
567	ErgoDeck® GP Solid w/GRITSHIELD™	17	>80%	MVSS 302 / "A" Rating
568	ErgoDeck® Smooth	16	>80%	MVSS 302 / "A" Rating
570-CFR	24/Seven® Solid CFR	38	>50%	MVSS 302 / "A" Rating
570-GR	24/Seven® Solid GR	39	>50%	MVSS 302 / "A" Rating
570-NBR	24/Seven® Solid NBR	39	>50%	MVSS 302 / "A" Rating
572-CFR	24/Seven® CFR	38	>50%	MVSS 302 / "A" Rating
572-GR	24/Seven® GR	39	>50%	MVSS 302 / "A" Rating
572-NBR	24/Seven® NBR	39	>50%	MVSS 302 / "A" Rating
574-CFR	24/Seven® Solid GRITSHIELD™ CFR	38	>50%	MVSS 302 / "A" Rating
574-NBR	24/Seven® Solid GRITSHIELD™ NBR	39	>50%	MVSS 302 / "A" Rating
576-CFR	24/Seven® GRITSHIELD™ CFR	38	>50%	MVSS 302 / "A" Rating
576-NBR	24/Seven® GRITSHIELD™ NBR	39	>50%	MVSS 302 / "A" Rating
580	Autoclavable Mat	74	<10%	MVSS 302 / "A" Rating
698	Safety Track	84	<10%	
701	D-P Switchboard Matting	53	<10%	MVSS 302 / "A" Rating
702	Corrugated Switchboard Matting	53	<10%	MVSS 302 / "A" Rating
710-MAT	Marbleized Military Switchboard Matting	54	<10%	MVSS 302 / "A" Rating
710-THR	Welding Thread	54	<10%	
711	Smooth Military Switchboard Matting	54	<10%	MVSS 302 / "A" Rating
712	D-P Military Switchboard	54	<10%	MVSS 302 / "A" Rating
720	Double Duty Switchboard Corrugated Mat	53	<10%	MVSS 302 / "A" Rating
785-DP	Electrically Conductive, Diamond-Plate	56	<10%	MVSS 302 / "A" Rating
785-SM	Electrically Conductive, Smooth	57	<10%	MVSS 302 / "A" Rating
786-DP	UltraSoft Electrically Conductive D-P	56	<10%	MVSS 302 / "A" Rating
786-SM	UltraSoft Electrically Conductive, Smooth	57	<10%	MVSS 302 / "A" Rating
788	Modular D-P ESD	58	<10%	MVSS 302 / "A" Rating
789	Modular WorkSafe® Light ESD	58	<10%	MVSS 302 / "A" Rating
791	Static Dissipative Anti-Fatigue	59	<10%	MVSS 302 / "A" Rating
793-Surface	ESD Work Surface Material	60	<10%	

Tabor Abrasion	Temp Range (°F)	Coefficient of Friction	Compression Deflection
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: .75 / Wet: .28	ASTM D 395 / 30 minutes 5.67 / 24 hours 1.42
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: .75 / Wet: .28	ASTM D 395 / 30 minutes 5.67 / 24 hours 1.42
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: .75 / Wet: .28	ASTM D 395 / 30 minutes 5.67 / 24 hours 1.42
Fed Std 191 / 1% lost @ 1,000 cycles	-50-250	ASTM F1677 / Dry: .75 / Wet: .28	ASTM D 395 / 30 minutes 5.67 / 24 hours 1.42
	-20-160		
	-20-160		
	-20-200		ASTM D 1056 / 25%
	-20-200		ASTM D 1056 / 25%
Fed Std 191 / 1000g, CS-17 wheel	10-110	ASTM F1677 / Dry: .68 / Wet: .17	ASTM D395-98 / 20%
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: .81 / Wet: .49	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: .81 / Wet: .49	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: 1.1 / Wet: .63	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: 1.1 / Wet: .63	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: .81 / Wet: .49	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: 1.1 / Wet: .63	
ASTM D 3884 / 1% loss	10-110	ASTM F1677 / Dry: .81 / Wet: .49	
ASTM D 3884 / <1% loss	10-110	ASTM F1677 / Dry: 1.10 / Wet: 1.10	ASTM D575-91 / 8.03%
ASTM D 3884 / <1% loss	10-110	ASTM F1677 / Dry: 1.10 / Wet: 1.10	ASTM D575-91 / 10.00%
ASTM D 3884 / <1% loss	10-110	ASTM F1677 / Dry: 1.10 / Wet: 1.10	ASTM D575-91 / 10.00%
ASTM D 3884 / <1% loss	10-110	ASTM F1677 / Dry: 1.10 / Wet: 1.10	ASTM D575-91 / 4.84%
ASTM D 3884 / <1% loss	10-110	ASTM F1677 / Dry: 1.10 / Wet: 1.10	ASTM D575-91 / 4.84%
ASTM D 3884 / <1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 19.98%
ASTM D 3884 / <1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 19.98%
ASTM D 3884 / <1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 19.85%
ASTM D 3884 / <1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 19.85%
ASTM D 3884 / <1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 4.84%
ASTM D 3884 / 1% loss	0-120	ASTM F1677-05 / Dry: 1.1 / Wet: .93	
ASTM D 3884 / 1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 4.84%
ASTM D 3884 / 1% loss	0-120	ASTM F1677-05 / Dry: 1.1 / Wet: .93	
ASTM D 3884 / 1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 14.15%
ASTM D 3884 / 1% loss	0-120	ASTM F1677-05 / Dry: 1.1 / Wet: .93	
ASTM D 3884 / 1% loss	0-120	ASTM F1677 / Dry: .65 / Wet: .42	ASTM D575-91 / 14.15%
ASTM D 3884 / 1% loss	0-120	ASTM F1677-05 / Dry: 1.1 / Wet: .93	
ASTM D 3884 / 1% loss	0-120	ASTM F1677 / Dry: COF = .65 / Wet: COF = .42	ASTM D575-91 / 14.15%
Fed Std 191 Modified / 1% loss	10-110	ASTM F1677 / Dry: .78 / Wet: .68	
Fed Std 191 Modified / 1% loss	10-110	ASTM F1677 / Dry: .78 / Wet: .68	
Fed Std 191 Modified / 1% loss	10-110	ASTM F1677 / Dry: .78 / Wet: .68	
Fed Std 191 Modified / 1% loss	10-140	ASTM F1677 / Dry: .90 / Wet 020	
Fed Std 191 Modified / 1% loss	10-140	ASTM F1677 / Dry: .90 / Wet 020	
Fed Std 191 Modified / 1% loss	10-140	ASTM F1677 / Dry: .90 / Wet 020	
Fed Std 191 Modified / 1% loss	55-60	ASTM F1677 / Dry: 1.10 / Wet 1.10	ASTM D 575 / Deflection @ 35 psi, mm = 8.02, inches = .315
Fed Std 191 Modified / 1% loss	55-60	ASTM F1677 / Dry: 1.10 / Wet 1.10	ASTM D 575 / Deflection @ 35 psi, mm = 8.02, inches = .315
Fed Std 191 Modified / 1% loss	55-60	ASTM F1677 / Dry: 1.10 / Wet .90	ASTM D 575 / Deflection @ 35 psi, mm = 8.02, inches = .315
Fed Std 191 Modified / 1% loss	55-60	ASTM F1677 / Dry: 1.10 / Wet .90	ASTM D 575 / Deflection @ 35 psi, mm = 8.02, inches = .315
Fed Std 191 Modified / 1% loss		ASTM F1677 / Dry: .78 / Wet: .68	
		ASTM F1677 / Dry: .95 / Wet: .80	
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: COF .68 / Wet: COF .17	
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: .91	
		ASTM F1677 / Dry: COF .79	
	-20-160	Not Available	
	-20-160	ASTM F1677 / Dry: COF .79	
Fed Std 191 / 4% lost @ 1,000 cycles	-20-160	ASTM F1677 / Dry: COF .68 / Wet: COF .17	
Fed Std 191 / 1% lost @ 1,000 cycles		ASTM F1677 / Dry: COF .91	
Fed Std 191 / 1% lost @ 1,000 cycles	-10-130	ASTM F1677 / Dry: .68 / Wet: .17	
Fed Std 191 / 1% lost @ 1,000 cycles	-10-130	ASTM F1677 / Dry: .68 / Wet: .17	
Fed Std 191 / 1% lost @ 1,000 cycles	-10-130	ASTM F1677 / Dry: .90	ASTM D575 / Deflection @ 35 psi, mm = 8.43
Fed Std 191 / 1% lost @ 1,000 cycles	-10-130	ASTM F1677 / Dry: .90	ASTM D575 / Deflection @ 35 psi, mm = 8.43
	-50-250	ASTM F1677 / Dry: >.84 / Wet: .78 / Oily: .34	ASTM D575 / Deflection @ 35 psi, mm = 4.10
Fed Std 191 / 1% lost @ 1,000 cycles	0-110	ASTM F1677 / Dry: .62 / Wet: .17	ASTM D575 / Deflection @ 35 psi, mm = .343

*melting point

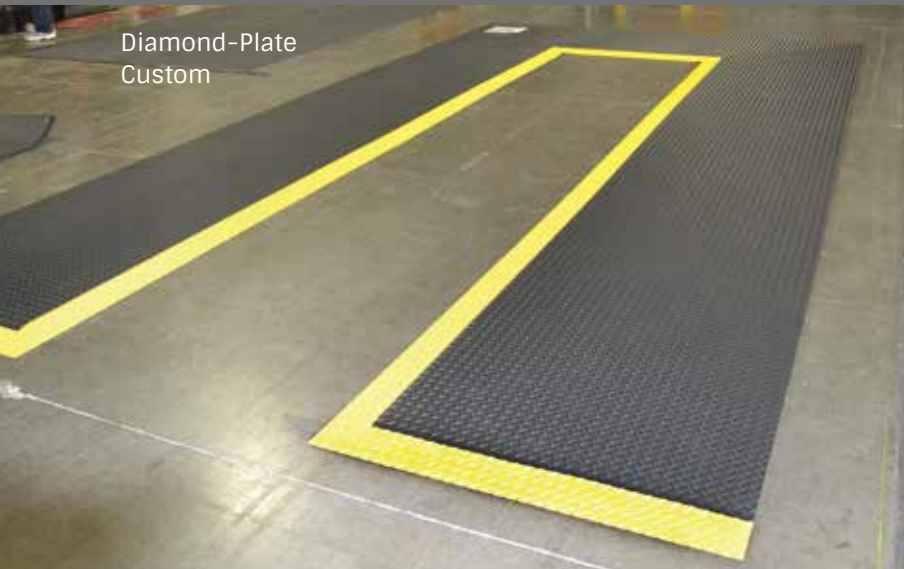

Diamond-Plate
Custom



24/Seven
Custom



Rejuvenator®
Custom

Customization

24/Seven® Custom

One-Size does not fit all. Unique production processes call for specialized work flow. Your anti-fatigue solution should fit your special space. Customization is easy to fit any configuration. Large or original shapes are our specialty. Contact us for a site survey or send us a drawing of your spacial configuration. No matter whether it is a C1 which is length only, C2 where we customize the length and the width, or a C3 where we have a full custom configuration for your specific area, we can build to suit your needs.



ErgoDeck® Cleated



ErgoDeck® General Purpose



Clean-Room Mat



Rejuvenator®
Square Design

No matter if you are a safety or facility manager looking to improve safety and performance, or an operations manager interested in reducing costs and meeting regulations, a Site-Survey can offer opportunities to help meet your goals.

- ◇ Improve Safety Performance
- ◇ Prevent Lost Time
- ◇ Manage Risk and Compliance
- ◇ Reduce Down-Time
- ◇ Heighten Morale & Productivity

Benefits:

The Wearwell Site-Survey is Free of charge

This service is valued at \$2000, but we provide it at no charge with confidence we will earn your business.

Your team, your plan

You can prioritize based on your time-line and budget.

Work with your Current Distributors

With our large network of top notch distributors, purchasing Wearwell flooring and matting is simple and convenient.

Backed by 65 Years of Expertise

You could purchase competitor products, but we are confident you won't find any that can compare to the quality and value of a Wearwell product.



The Right Product For The Right Environment



ERGODECK® FLOORING



REJUVENATOR® RUNNER



DIAMOND-PLATE SPONGECOTE® MAT



Find Your Anti-Fatigue and Safety Solutions
@ www.Wearwell.com

NEED HELP? We Have Over 70 Field Experts
Across U.S., Canada, Mexico, South America, Scandinavia, Europe and Asia



NORTH AMERICA

Wearwell, Inc. (Headquarters)
Phone: 1.800.264.3030
info@wearwell.com
www.wearwell.com

MEXICO

www.wearwell.com/mx

CANADA

www.wearwell.com/fr

UK & IRELAND

Wearwell Europe LTD
Phone: 44.1844.212117
info@wearwell-europe.co.uk
www.wearwell.com/uk

EUROPE

Wearwell Europe LTD
Phone: 31.77.201.4028
europe@wearwell.eu
www.wearwell.com/uk